

## CX4-9

### Marine and Land Based VHF Antenna

CX4-9 is an omnidirectional dipole antenna. The CX4-9 is manufactured in premium quality materials in order to prevent galvanic corrosion. Radiating elements are made of brass.


CX4-9 has been sold worldwide for more than four decades. The antenna is subject for improvement at all times. The antenna has the same rugged design as all other AC Antennas products thus it withstands harsh environmental conditions, both on sea and land.

#### Electrical specifications

Frequency range (MHz)	118.0-137.0
Nominal impedance (ohm)	50
VHF power rating (Watt).	150
Gain (dBd/Marine dB)	0/3
VSWR	118-121MHz: <1.7:1
	121-134MHz: <1.6:1
	134-137MHz: <1.7:1
Polarization	Vertical
Connector	N-female
DC-shorted	Yes

#### Mechanical specifications

Length (m/ft)	1.45/4.76
Weight (kg/lbs)	0.61/1.35
Wind rating, max. (m/s / mph)	55/123
Material	Fibre glass
Colour	White polyurethane lacquer
Temperature range (°C/°F)	-55 to +70 / -67 to +158
Ingress Protection	IP66

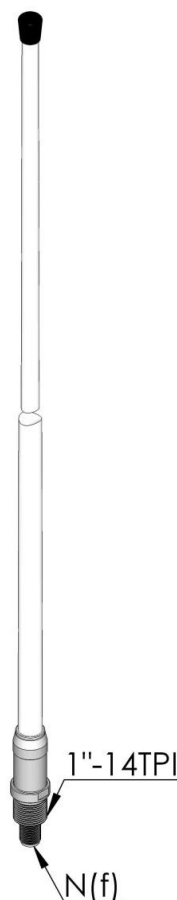


#### Mounting

No mount included. Can be used with all our 1"-14 TPI mounting equipment.

## VSWR

Voltage standing wave ratio is a measure of the energy lost in the coax cable/antenna connection. The figure to the right shows VSWR measurement based on the average of a significant numbers of antennas. All antennas delivered by AC Antennas are tested and a VSWR less than 1.6/1.7 is guaranteed in the specified frequency range.

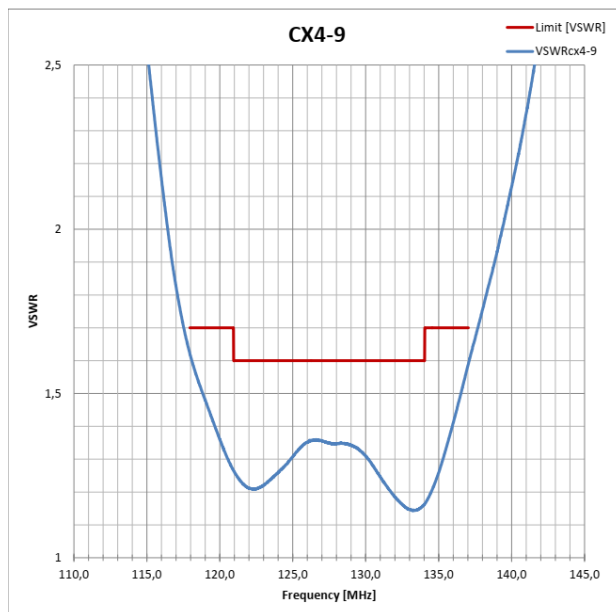

## Vertical radiation pattern

Vertical radiation pattern for the omnidirectional antenna at the center frequency. The figure shows that the antenna has 0 dB gain near the horizontal plane.

