

WX Series



Photo courtesy of MOBA

## WeatherStation® Multisensor – Ultrasonic Instruments for Land Applications

A Compact, Affordable Instrument for Informed Decision-Making

### Available Models: 110WX, 150WX, 200WX

Whether you are harvesting crops, operating equipment, preparing for bad weather or responding to a hazardous event, understanding the weather is important. The WX Series allows users to make informed decisions based on site specific information, resulting in improved efficiency, reduced risks and overall cost savings. Various model options are available depending on the application and requirements.

The WX Series WeatherStation Instruments offer a truly best-in-class solution at a better price compared to any other weather monitoring system on the market today!



Wind  
Speed &  
Direction



Barometric  
Pressure



Temp



Relative  
Humidity



GPS



Compass



Actual  
Size

### FEATURES

- Model 110WX – Measures apparent wind speed and angle, barometric pressure, air temperature, relative humidity, calculated dew point, heat index and wind chill temperature
- Models 150WX and 200WX – Includes all 110WX functionality plus internal compass and GPS (for theoretical wind speed and direction), GPS position, speed and course over ground
- Model 200WX – Best-in-class dynamic stabilization via three-axis compass and three-axis rate gyro
- UV stabilized, compact housing

# Product Models to Satisfy Multiple Weather Needs



Now available on iTunes — OnSiteWX  
The innovative App for real-time weather data!



110WX



150WX



200WX

	Apparent Wind Model		
	Recommended for Stationary Applications	Recommended for Moving Vehicle Applications	Recommended for Dynamic Moving Vehicle Applications
Apparent wind speed and angle	✓	✓	✓
Theoretical wind speed and direction		✓	✓
Barometric Pressure	✓	✓	✓
Ultrasonic wind readings up to 90 mph (40 m/s)	✓	✓	✓
Air temperature plus calculated wind chill	✓	✓	✓
10 Hz GPS (Position, COG, SOG)		✓	✓
Two-axis solid state compass		✓	
Three-axis accelerometer for pitch and roll		✓	✓
Three-axis solid-state compass with dynamic stabilization: Better than 1° static compass accuracy Best-in-class 2° dynamic compass accuracy			✓
Three-axis rate gyros provide rate-of-turn data			✓
Best-in-class pitch and roll accuracy			✓
Optional field-serviceable relative humidity Calculated dew point Calculated heat index	✓	✓	✓
Output options include: NMEA 0183 (RS422) and NMEA 2000® (CAN Bus) NMEA 0183 (RS232) and NMEA 2000® (CAN Bus)	✓	✓	✓


## WeatherCaster™ Software

### Developer Assistance

- Enable/disable functionality
- Optimize communications bandwidth NMEA 0183 (RS232, RS422)
- Change sampling rate (output interval)

### Field Installation Assistance

- Enable/disable functionality
- Sensor orientation
- Compass calibration
- Temperature offset
- Select specific device on a NMEA 2000® network
- Alarms for wind speed and barometric pressure
- Altitude offset
- More accurate GPS position in 2D mode
- More accurate BP reading

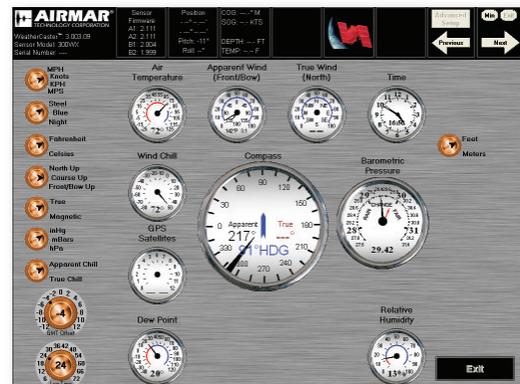

# Achieving Best-in-Class Product Specifications

## SPECIFICATIONS

### Wind Speed

Range: 0 to 40 m/s (0 to 89 MPH)  
 Accuracy: 5% at 10 m/s at 4 angles  
 Resolution: 0.1 m/s  
 Calculations: User configurable damping

### Wind Direction

Range: 0° to 359.9°  
 Accuracy: ±3° at 10 m/s  
 Resolution: 0.1°  
 Calculations: User configurable damping

### Air Temperature

Range: -40° to 80°C (-40 to 176°F)  
 Accuracy: ±1.1°C at 20°C  
 Resolution: 0.1°C

### Optional Relative Humidity

Range: 0 to 100% RH  
 Accuracy: ±5% RH at 0 to 90% RH at 20°C — 150WX and 200WX  
 ±3% RH at 0 to 90% RH at 20°C — 110WX  
 Resolution: 0.1% RH

### Barometric Pressure

Range: 300 to 1100 hPa  
 Accuracy: ±0.5 hPa at 25°C (or better)  
 Resolution: 0.1 hPa

### Two-axis Compass

Range: 0 to 359.9°  
 Accuracy: 1° RMS when level (150WX only), 1° static heading accuracy;  
 2° dynamic heading accuracy (three-axis compass, 200WX only)  
 Resolution: 0.1°

### Pitch and Roll

Measurement Type: MEMS  
 Range: 50°  
 Accuracy: ±1° in range of ±30°  
 Resolution: 0.1°

### GPS Position Accuracy: 3 m (10') CEP

### Operating Temperature Range: -25 to 55°C (-13 to 131°F)

### Power

Supply Voltage: 9 VDC to 40 VDC  
 Supply Current (at 12 VDC):  
 <55 mA (<0.7 W), LEN 2 — 110WX  
 <75 mA (<0.9 W), LEN 2 — 150WX and 200WX  
 NMEA 2000® Load Equivalency Number (LEN): 2

### Weight

275 grams (0.6 lbs) — 110WX  
 300 grams (0.7 lb) — 150WX and 200WX

### Mounting-thread Size on Base: Standard 1"-14 UNS (3/4" NPT optional)

Certifications and Standards: CE, IPX6 (IPX4 with optional Relative Humidity sensor), RoHS, IEC61000-4-2, IEC60945, IEC60950\_1C, IEC60950\_22A, EN55022, EN55024, EN14982

## COMMUNICATIONS

### Available Hardware Interfaces

Serial RS232, Serial RS422, CAN

### Available Protocols

Comma delimited ASCII, NMEA 0183, NMEA 2000®

### Serial Output Rate

1 Hz typical. User selectable. 10 Hz max recommended

## PART NUMBERS

110WX: 44-820-1-01, RH, NMEA 0183 (RS422) and NMEA 2000® (CAN Bus)

110WX: 44-823-1-01, NMEA 0183 (RS422) and NMEA 2000® (CAN Bus)

110WX: 44-843-1-01, RH, NMEA 0183 (RS232) and AG (CAN Bus)

150WX: 44-832-1-01, RH, NMEA 0183 (RS422) and NMEA 2000® (CAN Bus)

150WX: 44-833-1-01, NMEA 0183 (RS422) and NMEA 2000® (CAN Bus)

150WX: 44-834-1-01, RH, NMEA 0183 (RS232) and AG (CAN Bus)

200WX: 44-835-1-01, NMEA 0183 (RS422) and NMEA 2000® (CAN Bus)


200WX: 44-837-1-01, RH, NMEA 0183 (RS422) and NMEA 2000® (CAN Bus)

200WX: 44-847-1-01, NMEA 0183 (RS232) and NMEA 2000® (CAN Bus)

Cables sold separately

RH— Relative Humidity

## DIMENSIONS

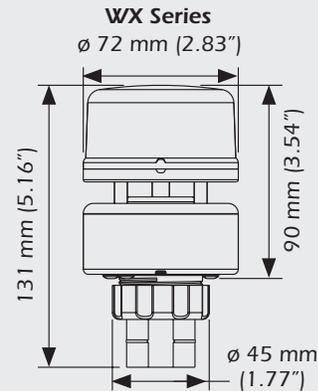

## SERIAL DATA OUTPUT PROTOCOL

### NMEA 0183 Sentence Structure – Comma Delimited ASCII Format

\$GPDTM..... GPS Datum Reference  
 \$GPGGA..... GPS Fix Data  
 \$GPGLL..... Geographic Position—Latitude and Longitude  
 \$GPGSA..... GNSS DOP and Active Satellite  
 \$GPGSV..... Satellites in View  
 \$GPRMC..... Recommended Minimum GNSS  
 \$GPVTG..... COG and SOG  
 \$GPZDA..... Time and Date  
 \$HCHDG..... Heading, Deviation, and Variation  
 \$HCHDT..... True Heading  
 \$HCTHS..... True Heading and Status  
 \$TIROT..... Rate of Turn  
 \$WIMDA..... Meteorological Composite  
 \$WIMWD..... Wind Direction and Speed  
 \$WIMWV..... Wind Speed and Angle  
 \$WIMWR..... Relative Wind Direction and Speed  
 \$WIMWT..... Theoretical Wind Direction and Speed  
 \$YXXDR..... Transducer Measurements


## CAN DATA OUTPUT PROTOCOL

### NMEA 2000® Output Message Structure

59392..... ISO Acknowledgement  
 060928..... ISO Address Claim  
 126208..... Acknowledge Group Function  
 126464..... PGN List  
 126992..... System Time  
 126996..... Product Information  
 126998..... Configuration Information  
 127250..... Vessel Heading  
 127251..... Rate of Turn  
 127257..... Attitude  
 127258..... Magnetic Variation  
 129025..... Position and Rapid Update  
 129026..... COG and SOG, Rapid Update  
 129029..... GNSS Position Data  
 129033..... Time and Date  
 129044..... Datum  
 129538..... GNSS Control Status  
 129539..... GNSS DOPs  
 129540..... GNSS Sats in View  
 130306..... Wind Data  
 130310..... Environmental Parameters  
 130311..... Environmental Parameters  
 130312..... Temperature  
 130313..... Humidity  
 130314..... Actual Pressure  
 130323..... Meteorological Station Data

# Understanding Theoretical and Apparent Wind

Virtually all mechanical and ultrasonic anemometers report apparent wind speed and direction. The Airmar WX Series is unique because it calculates both theoretical and apparent wind speed and direction. These wind readings are the same if the unit is mounted in a fixed location. However, if the WX Series is mounted on a moving vehicle, the apparent wind is the wind you would feel on your hand if you held it out the window while going down the highway. Since the WX Series has a built in GPS and compass, it calculates the theoretical wind based upon the apparent wind, speed of the vehicle, and compass heading.

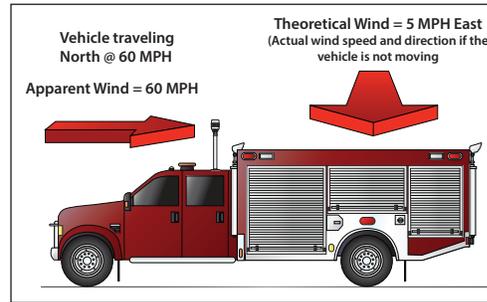

Airmar's WX Series products are the only all-in-one unit to offer theoretical and apparent wind speeds without additional sensors.



Theoretical wind information is significant for numerous applications on hazardous response vehicles. Theoretical wind speed and direction is also mission-critical. When enroute to an emergency situation, first responders can use the theoretical wind readings to predict wind conditions at the disaster site before they even arrive, giving vital information for planning operations and staging apparatus.

Each WeatherStation Instrument is factory calibrated in a wind tunnel at our state-of-the-art facility located in Milford, New Hampshire, USA.



True Wind: True wind is the same as above BUT relative to True (or Magnetic) North. In the case of a moving vehicle, True wind is not relevant because the vehicle will (almost) never be aligned to True (or Magnetic) North. In a mobile application True wind is a meaningless value.

# Performing Above and Beyond Competitive Products on the Market

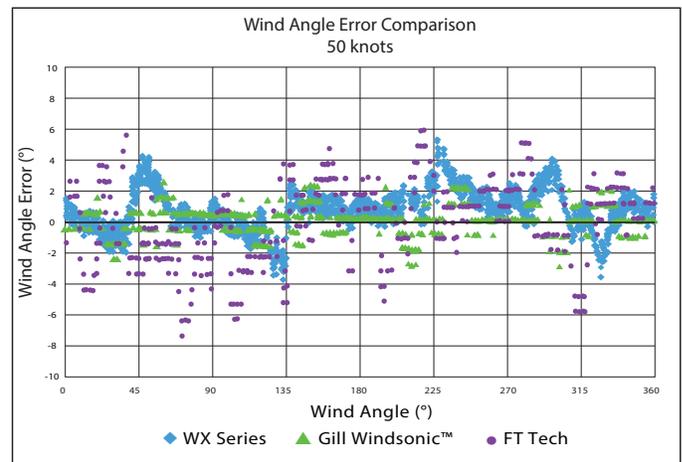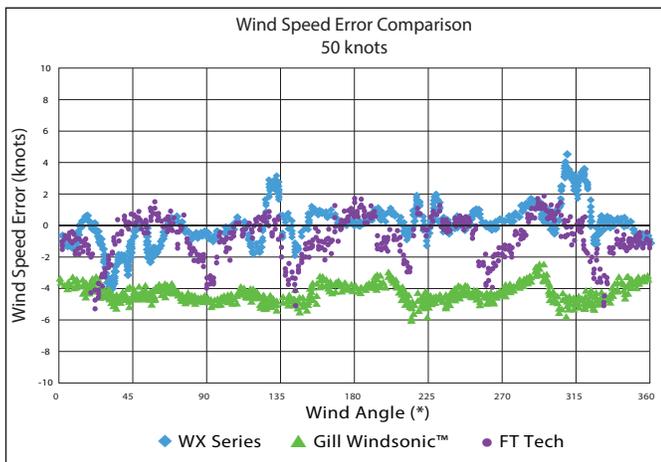

[WEATHERSTATIONWX.COM](http://WEATHERSTATIONWX.COM)

