



 **RIGID**®

OWN THE NIGHT ™



## TABLE OF CONTENTS

|     |                         |
|-----|-------------------------|
| 3   | Our Story               |
| 4   | Manufacturing           |
| 5   | Why RIGID               |
| 8   | How to Navigate Catalog |
| 11  | Adapt                   |
| 15  | D-SS PRO                |
| 19  | Radiance Curved         |
| 23  | Radiance Plus           |
| 27  | Radiance Pod            |
| 31  | Rear Facing             |
| 37  | Reflect                 |
| 39  | Ignite                  |
| 43  | Midnight Edition PRO    |
| 47  | Capture                 |
| 49  | RDS-Series PRO          |
| 53  | E-Series PRO            |
| 57  | SR-Series PRO           |
| 61  | D-Series PRO            |
| 65  | D-XL PRO                |
| 69  | Q-Series Pro            |
| 73  | SR-Q PRO                |
| 77  | SR-M PRO                |
| 81  | A-Series                |
| 83  | R-Series 46             |
| 87  | R-Series 36             |
| 91  | Scene Lights            |
| 95  | Site Series             |
| 99  | RI-Series               |
| 101 | Headlight Kits          |
| 103 | SAE Compliant           |
| 105 | E-Mark Compliant        |
| 106 | Amber Lights            |
| 107 | MIL-STD-461F            |
| 108 | Infrared                |
| 110 | Lighting Kits           |
| 115 | Grilles & OE Mounts     |
| 133 | Accessories             |



**ADAPT**  
PG. 11



**E-SERIES PRO**  
PG. 53



**SR-SERIES PRO**  
PG. 57



**RDS-SERIES PRO**  
PG. 49



**IGNITE**  
PG. 39



**SR-M SERIES PRO**  
PG. 77



**SR-Q SERIES PRO**  
PG. 73



**D-SS PRO**  
PG. 15




**D-SERIES PRO**  
PG. 61



**D-XL PRO**  
PG. 65



**Q-SERIES PRO**  
PG. 69

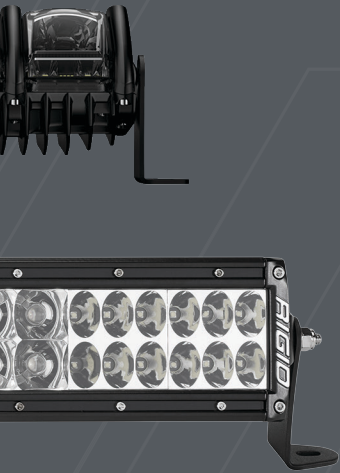


**SITE SERIES**  
PG. 95



**CAPTURE**  
PG. 47



**SCENE LIGHTS**  
PG. 91

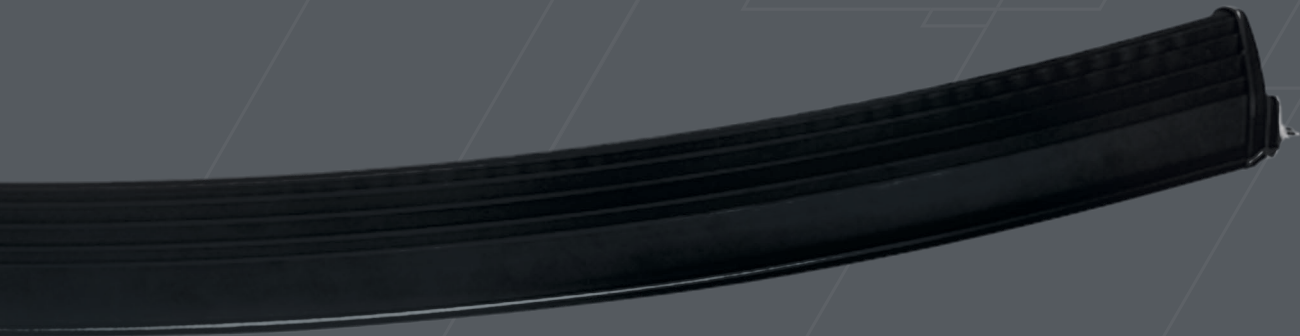


**HEADLIGHT KITS**  
PG. 101



**R-SERIES 46**  
PG. 83



**A-SERIES**  
PG. 81



**R-SERIES 36**  
PG. 87



**RADIANCE PLUS**  
PG. 23



**SAE COMPLIANT**  
PG. 103



**ACCESSORIES**  
PG. 133



**RI-SERIES**  
PG. 99



**GRILLES & OE MOUNTS**  
PG. 117




**REFLECT**  
PG. 37



**INFRARED LIGHTS**  
PG. 108



**CHASE**  
PG. 31

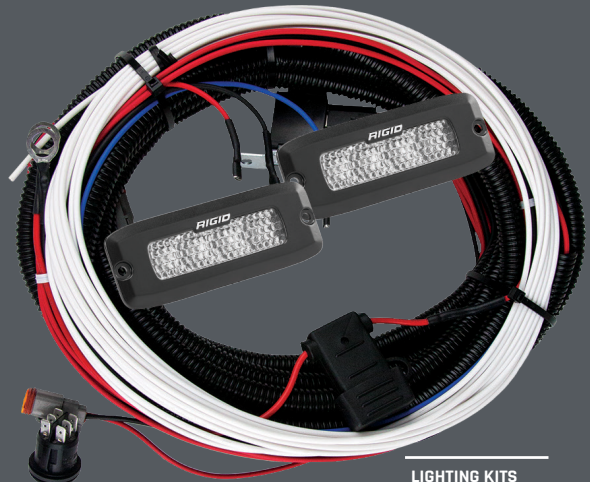

**LIGHTING KITS**  
PG. 109



**MIDNIGHT EDITION PRO**  
PG. 43

# RIGID INGENUITY

## OUR STORY

In 2006, Rigid Industries LED Lighting introduced the E-Series LED Light Bar, the first of its kind in the LED lighting industry. Since then, RIGID has led the forward projecting LED lighting industry in innovation, light output and efficiency. Up until that time, the industry had focused on traditional incandescent light for racing and recreational applications, but the advanced LED lighting technology, combined with the patented Hybrid, Specter, and Hyperspot optics that offered more lighting at a fraction of the power consumption quickly revolutionized lighting in the off-road industry. Our patented optic systems effectively control the beam of light emitted by the LED, which translates to more light where you want it with very little wasted spill light. Since the introduction of our first product, our design and engineering teams are constantly developing new and innovative quality products using the latest in LED technology.

While RIGID started as an off-road lighting company, we quickly realized that our advanced lighting technologies could be applied to many other industries. RIGID currently produces lighting for the automotive, power sports, agriculture, marine, mining/construction, military, police and fire rescue industries, just to name a few. We take pride in the fact that our LED lighting products are designed, engineered, and assembled in the USA. This not only builds our local economy, but it also allows RIGID to maintain the high level of quality that you've come to expect from RIGID products. This level of refinement and quality control is what separates RIGID from the rest.

In 2015 RIGID announced its acquisition by Truck-Lite®. Together, RIGID and Truck-Lite now offer the complete package of DOT, off-road and accessory LED lighting for not only on and off-road markets, but for markets from around the world in a wide variety of heavy-duty and commercial vehicle categories. RIGID and Truck-Lite take pride in the fact that our products are designed, engineered and assembled in the USA, employing over 2,400 people and counting. Both RIGID and Truck-Lite look forward to expanding our presence and products around the globe.



## MANUFACTURING

**RIGID** products are proudly designed, engineered, assembled and tested in our **ISO 9001:2008** facility in the United States. Currently, we have two locations in the greater Phoenix Metro area. Our highly skilled and motivated workforce takes pride in the fact that RIGID LED lighting products are built in the USA. This not only helps build our local economy, but allows us to remain hands-on, ensuring you will continue to receive the highest level of quality that you've come to expect from RIGID.

We go the distance by requiring extra testing and certifications for heavy-duty vibration, dust, moisture and corrosion resistance on our lights and brackets. This ensures that we have a product that we can stand behind, no matter the industry or application it is used for and we back all of our products with a Limited Lifetime Warranty. Quality workmanship, combined with innovative technologies allows us to produce the best forward projecting LED lights on the market.



# BUILD QUALITY

DON'T BE FOOLED BY OTHERS

## RIGID VS OTHERS



### 1. BOARDS

#### RIGID

**1.A**  
Aluminum PCB Smart Boards™

**1.B**  
Copper thermal conductive pad

**1.C**  
Gold plated electrical contacts

#### OTHERS

**1.A**  
Cost-cutting stock boards

### 2. LEDs

#### RIGID

**2.A**  
Hand selected brightest high-tech LEDs from the best LED manufacturers.

#### OTHERS

**2.A**  
Falsely claiming use of name brand LEDs (Cree), cheap, less advanced LEDs

### 3. OPTICS

#### RIGID

**3.A**  
RIGID invests heavily in optical science and has developed multiple patented optics that maximize the total light output and efficiency.

#### OTHERS

**3.A**  
Simple non-engineered reflector dishes that scatter the light.

### 4. CONNECTIONS

#### RIGID

**4.A**  
Waterproof connector mates with the supplied wiring harness.

#### OTHERS

**4.A**  
Blunt cut wires and no wiring harness, switch, or relay.

### 5. LENS & SEALS

#### RIGID

**5.A**  
Impact Resistant Polycarbonate Lens that will never yellow.

**5.B**  
Custom molded synthetic polymer gaskets create a 100% water/dustproof seal.

**5.C**  
GORE® Pressure Equalizing Vent. (not shown)

#### OTHERS

**5.A**  
Light diffusing glass or inferior plastics will quickly crack, scratch, and yellow.

**5.B**  
Hand-applied household silicone seal, no pressure vent.

### 6. COATING

#### RIGID

**6.A**  
6063-T5 aircraft aluminum extruded housings treated with Alodine® corrosion preventive and Tiger Drylac® UV protectant polyester powder coating.

**6.B**  
Corrosion-proof chrome-plated 304 stainless steel hardware.

#### OTHERS

**6.A**  
Thin-wall low-grade aluminum material with Single coat black paint that quickly fades when exposed to the sun.


**6.B**  
Zinc or non-coated hardware quickly corrodes under harsh environments or salt exposure.



# REAL COST OF OWNERSHIP

Exclusions May Apply

**RIGID**  
VS  
**OTHERS** = **REAL COST**  
**\$\$\$\$**  
**\$\$\$\$\$**



ORIGINAL LIGHT COST

**\$\$\$\$**  
VS  
**\$\$**



HARNESS, SWITCH & RELAY

**INCLUDED**  
VS  
**+\$**



WARRANTY

**INCLUDED**  
VS  
**NONE**  
OR LIMITED



OUTPUT PER LIGHT

**MAXIMUM**  
VS  
**+\$**  
MULTIPLE LIGHTS NEEDED



DE MOUNTS & ACCESSORIES

**OFFERED**  
VS  
**NONE**  
OR LIMITED

# WARRANTY

If you own a RIGID light and it breaks, we will replace or repair it for life.



CUSTOMER SERVICE

**RIGID**  
VS  
**OTHERS**

**DEDICATED USA BASED**  
VS  
**WHO DO YOU CALL?**



SHIP PRODUCT TO FACILITY

**US ADDRESS**  
VS  
**NOWHERE TO SEND IT?**



PRODUCT SERVICE

**REPAIRED OR REPLACED**  
VS  
**NOT COVERED OR REPLACED WITH ANOTHER INFERIOR PRODUCT**




PRODUCT

**DESIGNED, ENGINEERED, AND ASSEMBLED IN THE USA**  
VS  
**WHO KNOWS WHERE THE LIGHTS ARE MADE?**

[LEARN MORE](https://www.rigidindustries.com/about/warranty) | [RIGIDINDUSTRIES.COM/ABOUT/WARRANTY](https://www.rigidindustries.com/about/warranty)


# HOW TO CHOOSE AN OPTIC

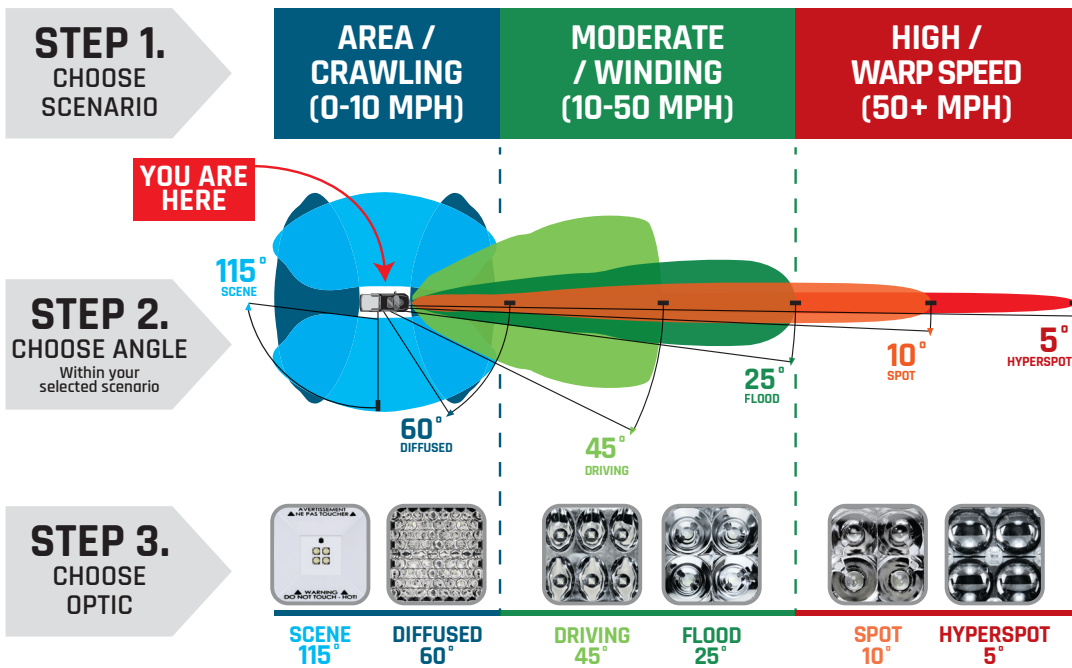

**NEW**  
WEB BASED  
APPLICATION

## RIGID VIEWPOINT

**SELECT LIGHTS & OPTICS  
THEN COMPARE IN REAL WORLD SCENE**

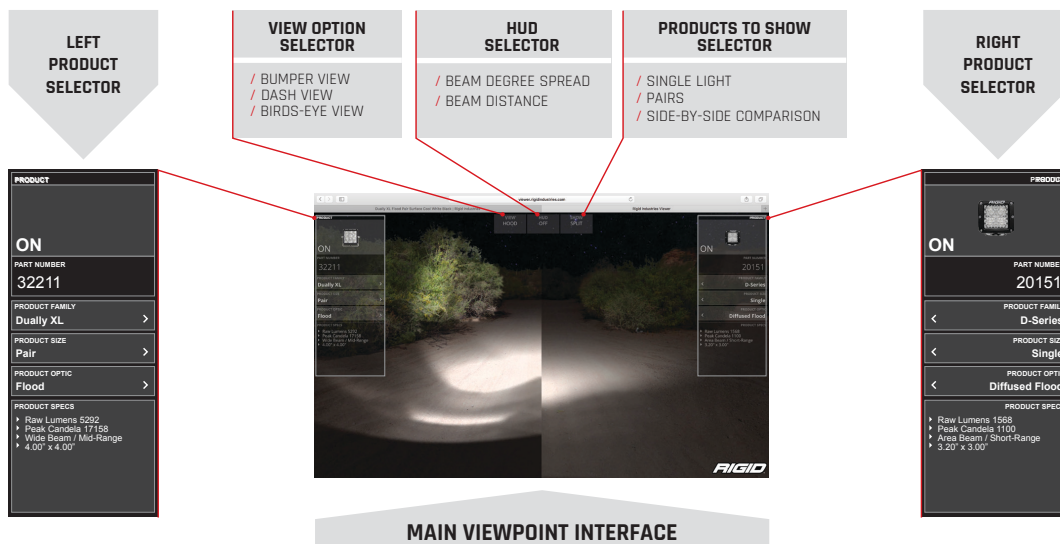

**LEARN MORE** | [RIGIDINDUSTRIES.COM/VIEWPOINT](http://RIGIDINDUSTRIES.COM/VIEWPOINT)



# LIGHTS

pg 11 - pg 109

## **BUILD INCLUDES**

Radiance Pod | PG. 27


Radiance+ | PG. 23





# ADAPT™

The RIGID® Adapt™ LED Light Bars are the world's first off-road lighting products that can change instantly according to conditions. Adapt offers 8 selectable beam patterns that range from broad short-distance lighting to highly focused long-distance lighting in a single fixture. It also includes RIGID's new Active View™ Technology, which allows the beam pattern to actively adjust with vehicle speed. There are no moving parts within the Adapt. Instead, RIGID uses advanced LED technology and combines it with patented new optics to create a revolutionary lighting solution that can Adapt with changing conditions. Further, Adapt has built-in accent lighting that can be set to any color in the light spectrum, including white, for a custom look around town. The Adapt has a signature new look that is unlike any other light bar on the market, and it even has expanded mounting capabilities that include new base-mounting options in addition to traditional side mounts. Adapt LED light bars include a RIGID Dash Controller, which is a molded backlit dash-mounted unit that offers easy, intuitive control of Adapt's beam patterns, Adaptive Mode, accent lighting, and programmable presets. RIGID Adapt Light Bars are available in 10-inch to 50-inch lengths and include a RIGID Dash Controller, Under Dash Module, wiring harness, and mounting hardware. With the RIGID Adapt, it has never been easier to Own the Night.

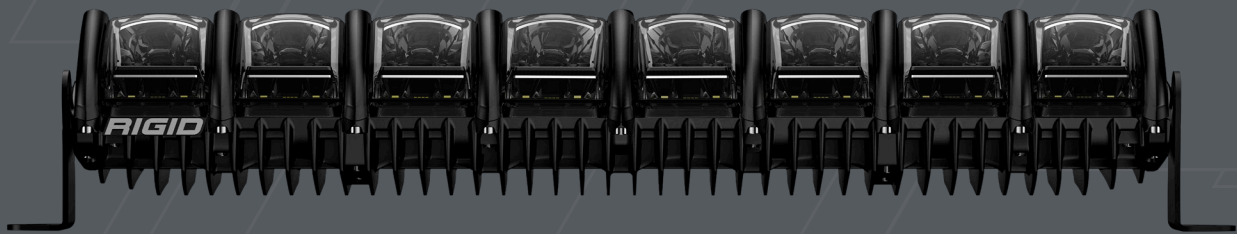

**8 MODE -  
ACTIVE VIEW  
TECHNOLOGY**



## RGBW ACCENT LIGHTING




## FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Dash Controller Included
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Op. Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration

## DASH CONTROLLER



- Active View™ Technology - Automatically Change Beam Patterns Based On Vehicle Speed
- Dash Controller & Under Dash Module with Wiring Harness
- Molded RIGID Dash Controller with 2 User Presets - Preset Both Beam Pattern Mode & Accent Lighting Colors
- 8 Selectable Beam Patterns from 15-Degrees to 90-Degrees
- Integrated Optic Design with Spot, Flood, and Driving Zones
- Selectable RGB-W Accent Lighting - With User-Configuration, Choose from any Color in the Light Spectrum
- Back Lit Molded Dash Controller - Enables User to Select Mode, Accent Color, Adaptive Mode, and Select Between 2 User Presets
- Multiple Mounting Locations; Traditional Side Mounting or Underside Low-Profile\* (Sold Separately)
- Patent-Pending Technology

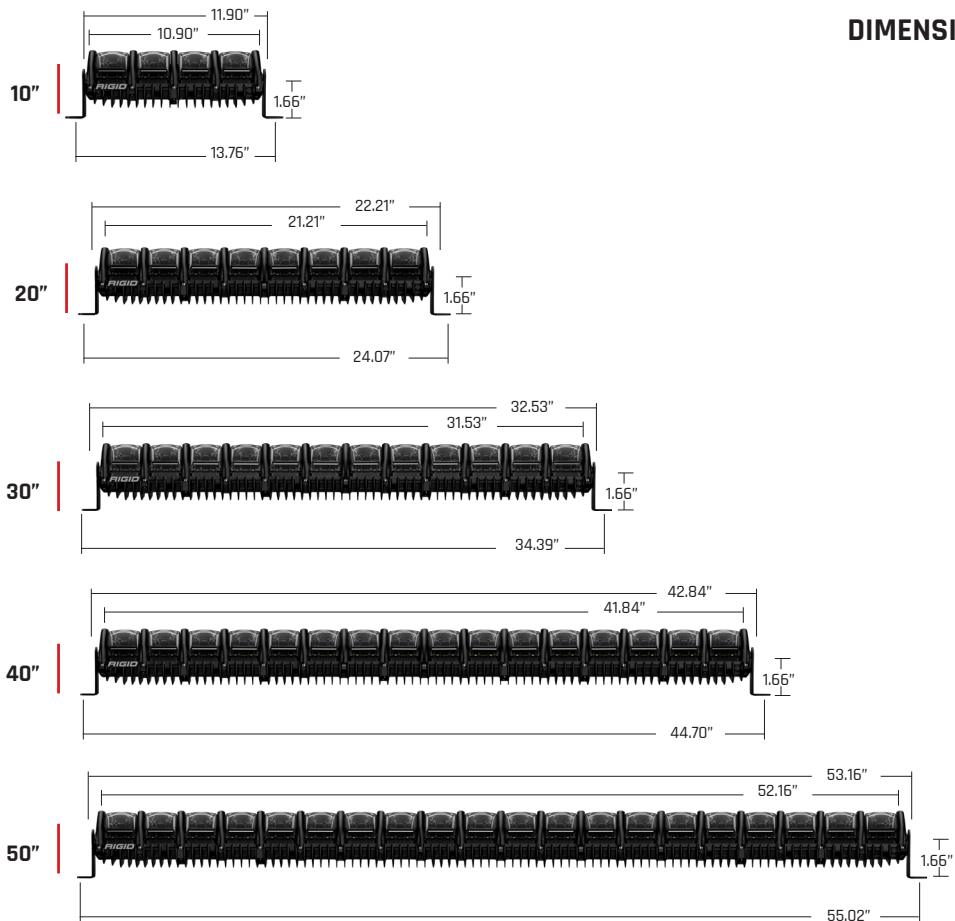

## DIMENSIONS



BEAM PATTERNS  
THAT CAN  
ACTIVELY ADJUST  
WITH CHANGING  
CONDITIONS




## 8 BEAM PATTERNS MODES

The RIGID Adapt offers 8 selectable beam patterns that range from broad short-distance lighting to highly focus long-distance lighting in a single fixture. It also includes RIGID's new Active View™ Technology, which allows the beam pattern to actively adjust with vehicle speed. There are no moving parts within the Adapt. Instead, RIGID uses advanced LED technology and combines it with patented new optics to create a revolutionary lighting solution that can Adapt with changing conditions.



### 8 MODES

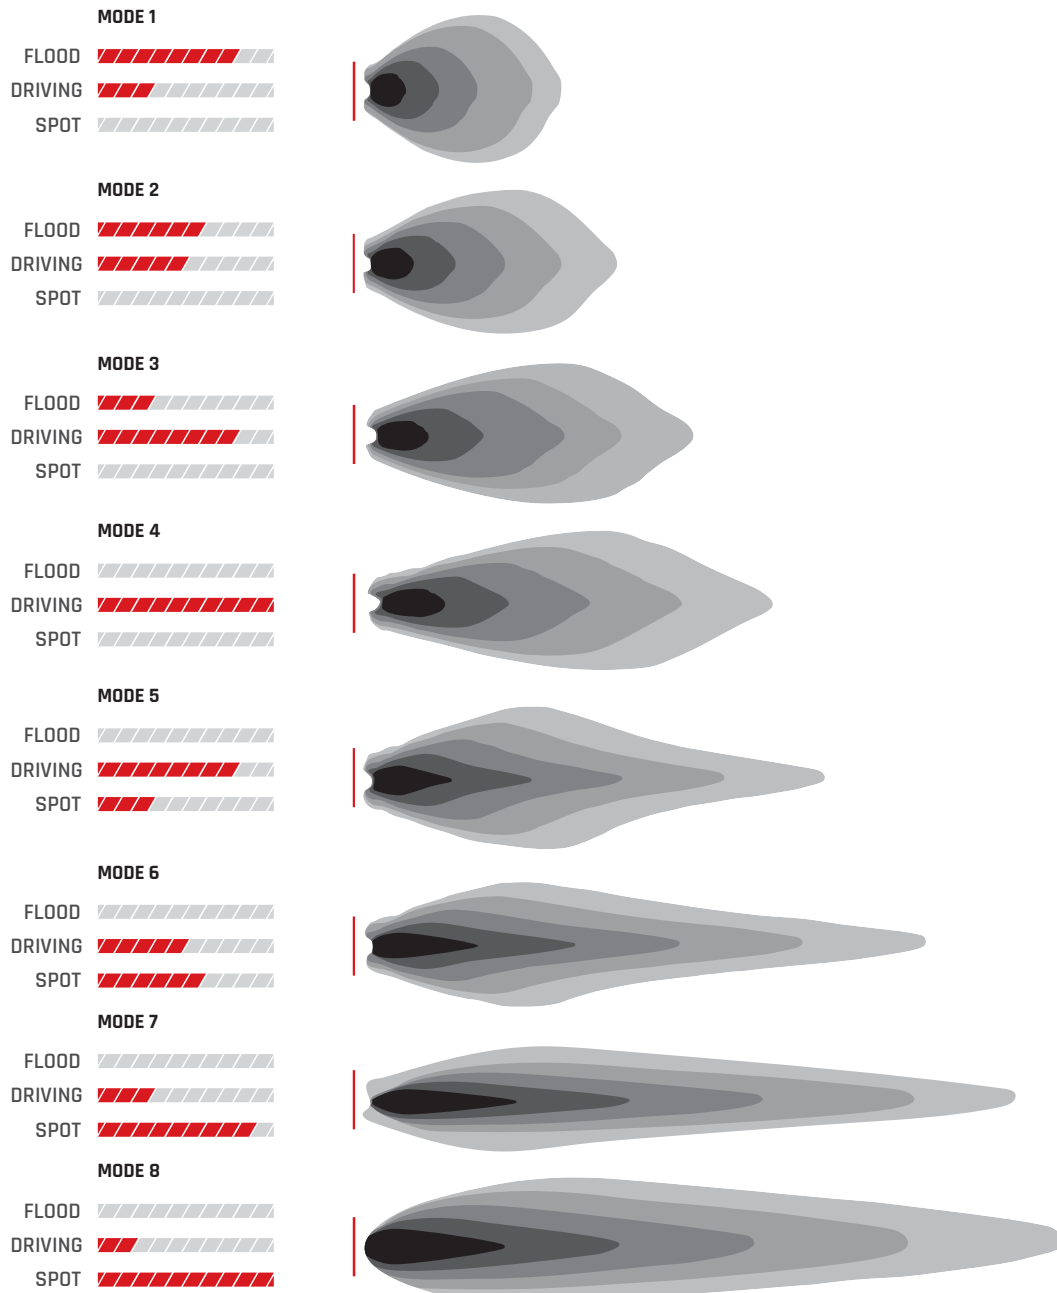





**ACTIVE MODE -  
MULTIPLE PRESET  
OUTPUTS IN ONE  
LIGHT**

A = LUX AT 10 METERS

B = BEAM DISTANCE (m) WITH 1 LUX

C = BEAM DISTANCE (m) WITH .25 LUX

## SPECIFICATIONS



| SIZE | PART#  | MODE | WT (LBS.) | WATTS | AMP DRAW @14VDC | LEDS | *RAW LUMENS | A    | B     | C    | **PEAK BEAM INTENSITY(cd) | HORIZONTAL FIELD DEGREE |
|------|--------|------|-----------|-------|-----------------|------|-------------|------|-------|------|---------------------------|-------------------------|
| 10"  | 210413 | 1    | 5.3       | 80    | 5.7             | 28   | 6848        | 78   | 88    | 177  | 7874.6                    | 90°                     |
|      |        | 2    | 5.3       | 88    | 6.3             | 28   | 6985        | 123  | 111   | 222  | 12324                     | 75°                     |
|      |        | 3    | 5.3       | 93    | 6.6             | 28   | 7173        | 157  | 125   | 251  | 15794                     | 70°                     |
|      |        | 4    | 5.3       | 94    | 6.7             | 28   | 7360        | 191  | 138   | 277  | 19192                     | 65°                     |
|      |        | 5    | 5.3       | 90    | 6.4             | 28   | 6840        | 442  | 210   | 420  | 44258                     | 35°                     |
|      |        | 6    | 5.3       | 87    | 6.2             | 28   | 6320        | 523  | 228   | 457  | 52324                     | 25°                     |
|      |        | 7    | 5.3       | 78    | 5.6             | 28   | 5800        | 1228 | 350   | 701  | 122877                    | 20°                     |
|      |        | 8    | 5.3       | 69    | 4.9             | 28   | 5280        | 1590 | 398   | 797  | 159081                    | 15°                     |
| 20"  | 220413 | 1    | 10        | 160   | 11.4            | 56   | 13696       | 156  | 125   | 250  | 15633                     | 90°                     |
|      |        | 2    | 10        | 176   | 12.6            | 56   | 13970       | 237  | 154   | 308  | 23791                     | 75°                     |
|      |        | 3    | 10        | 186   | 13.3            | 56   | 14346       | 316  | 177   | 355  | 31603                     | 70°                     |
|      |        | 4    | 10        | 187   | 13.4            | 56   | 14720       | 380  | 195   | 389  | 39008                     | 65°                     |
|      |        | 5    | 10        | 180   | 12.9            | 56   | 13680       | 919  | 303   | 606  | 91999                     | 35°                     |
|      |        | 6    | 10        | 174   | 12.4            | 56   | 12640       | 1546 | 393   | 786  | 154626                    | 25°                     |
|      |        | 7    | 10        | 156   | 11.1            | 56   | 11600       | 2126 | 461   | 922  | 212661                    | 20°                     |
|      |        | 8    | 10        | 138   | 9.8             | 56   | 10560       | 2916 | 540   | 1080 | 291643                    | 15°                     |
| 30"  | 230413 | 1    | 14.6      | 240   | 17.2            | 84   | 20544       | 226  | 150   | 300  | 22638                     | 90°                     |
|      |        | 2    | 14.6      | 265   | 18.9            | 84   | 20955       | 347  | 186   | 373  | 34797                     | 75°                     |
|      |        | 3    | 14.6      | 278   | 19.9            | 84   | 21519       | 455  | 213   | 427  | 45580                     | 70°                     |
|      |        | 4    | 14.6      | 281   | 20.0            | 84   | 22080       | 542  | 232   | 465  | 54212                     | 65°                     |
|      |        | 5    | 14.6      | 270   | 19.3            | 84   | 20520       | 1188 | 344   | 689  | 118875                    | 35°                     |
|      |        | 6    | 14.6      | 261   | 18.6            | 84   | 18960       | 1842 | 429   | 858  | 184238                    | 25°                     |
|      |        | 7    | 14.6      | 234   | 16.7            | 84   | 17400       | 2485 | 498   | 997  | 248539                    | 20°                     |
|      |        | 8    | 14.6      | 207   | 14.8            | 84   | 15840       | 3666 | 605   | 1211 | 366611                    | 15°                     |
| 40"  | 240413 | 1    | 19.3      | 320   | 22.9            | 112  | 27392       | 315  | 177   | 355  | 31592                     | 90°                     |
|      |        | 2    | 19.3      | 353   | 25.2            | 112  | 27940       | 461  | 214   | 429  | 46116                     | 75°                     |
|      |        | 3    | 19.3      | 371   | 26.5            | 112  | 28692       | 604  | 245   | 491  | 60462                     | 70°                     |
|      |        | 4    | 19.3      | 374   | 26.7            | 112  | 29440       | 710  | 266   | 533  | 71064                     | 65°                     |
|      |        | 5    | 19.3      | 361   | 25.8            | 112  | 27360       | 1466 | 382   | 765  | 146620                    | 35°                     |
|      |        | 6    | 19.3      | 348   | 24.8            | 112  | 25280       | 2354 | 485.3 | 970  | 235499                    | 25°                     |
|      |        | 7    | 19.3      | 312   | 22.3            | 112  | 23200       | 3170 | 563   | 1126 | 317005                    | 20°                     |
|      |        | 8    | 19.3      | 276   | 19.7            | 112  | 21120       | 4399 | 663   | 1326 | 439924                    | 15°                     |
| 50"  | 250413 | 1    | 24.2      | 400   | 28.6            | 140  | 34240       | 353  | 188   | 376  | 35348                     | 90°                     |
|      |        | 2    | 24.2      | 441   | 31.5            | 140  | 34925       | 509  | 225   | 451  | 50992                     | 75°                     |
|      |        | 3    | 24.2      | 464   | 33.1            | 140  | 35865       | 665  | 258   | 516  | 66585                     | 70°                     |
|      |        | 4    | 24.2      | 468   | 33.4            | 140  | 36800       | 783  | 279   | 559  | 78370                     | 65°                     |
|      |        | 5    | 24.2      | 451   | 32.2            | 140  | 34200       | 1577 | 397   | 794  | 157756                    | 35°                     |
|      |        | 6    | 24.2      | 435   | 31.1            | 140  | 31600       | 2602 | 510   | 1020 | 260282                    | 25°                     |
|      |        | 7    | 24.2      | 390   | 27.9            | 140  | 29000       | 3496 | 591   | 1182 | 349697                    | 20°                     |
|      |        | 8    | 24.2      | 344   | 24.6            | 140  | 26400       | 4765 | 690   | 1380 | 476570                    | 15°                     |



### LIGHTS COME WITH

- GPS Module
- Mounting Hardware
- Black Powder Coated, L-Shape Brackets
- Dash Controller & Under Dash Module with Wiring Harness and Hardware

### SOLD SEPARATELY


- Underside Low-Profile Mounts
- Light Covers

# D-SS<sup>®</sup> PRO

One of RIGID's most versatile, compact lighting solutions just got better with the RIGID D-SS PRO, Dually Side Shooter LED pod. Perfect for any application that requires a wide spread beam, including A-Pillars, Fog Lights, and motorcycle applications. The D-SS PRO incorporates powerful optics and recently improved LED technology for greater output with the added benefit of additional LEDs aimed to the side for a much broader beam. The D-SS PRO packs a powerful punch up to 7,920 lumens depending on the optics chosen. The D-SS fixtures boast up to 120-degrees of horizontal lighting coverage when used in pairs or when used in the single light applications. The main forward-facing LEDs are available with RIGID's advanced Flood, Spot, or Driving optics, so there's a D-SS PRO lighting solution for nearly any application. The D-SS PRO LED lights are available in pairs with three side-shooting LEDs on one side of each fixture, or in single applications with a pair of side-shooting LEDs on both sides of the fixture. Only RIGID provides a broad, powerful lighting solution in such a compact package.

RIGID's D-SS PRO lights are also available with a durable white finish. Though suitable for marine applications, RIGID's white lighting products are perfect for use anywhere an alternative to black is desired. The distinctive white is a durable UV-resistant powder coated finish with an additional chromate conversion coating for superior corrosion resistance. They feature the same legendary lighting technology and superior build quality as the rest of RIGID's lighting products, providing reliable and efficient lighting on demand.

120° LIGHT  
COVERAGE

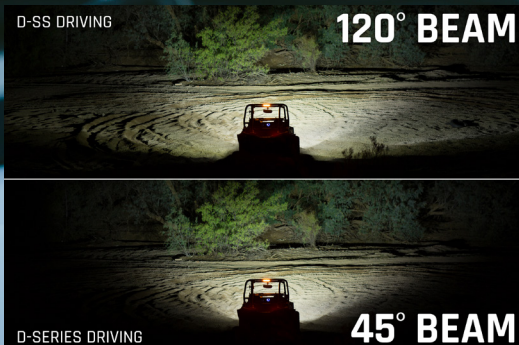





## FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant – Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant – Shock / Vibration
- Waterproof Deutsch Connector

## DIMENSIONS & MOUNTS



### SURFACE MOUNT




WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?




## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.

### SINGLES

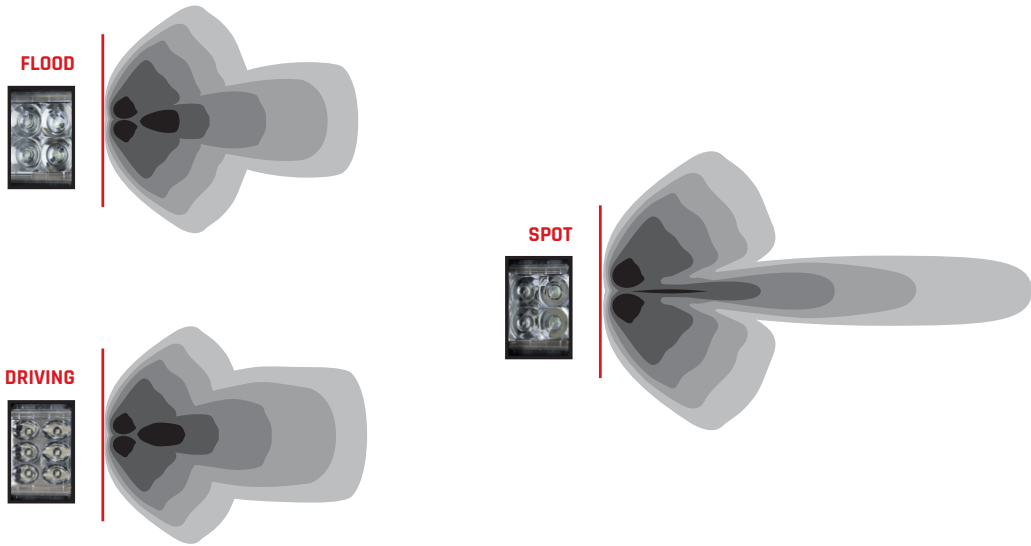

### PAIRS

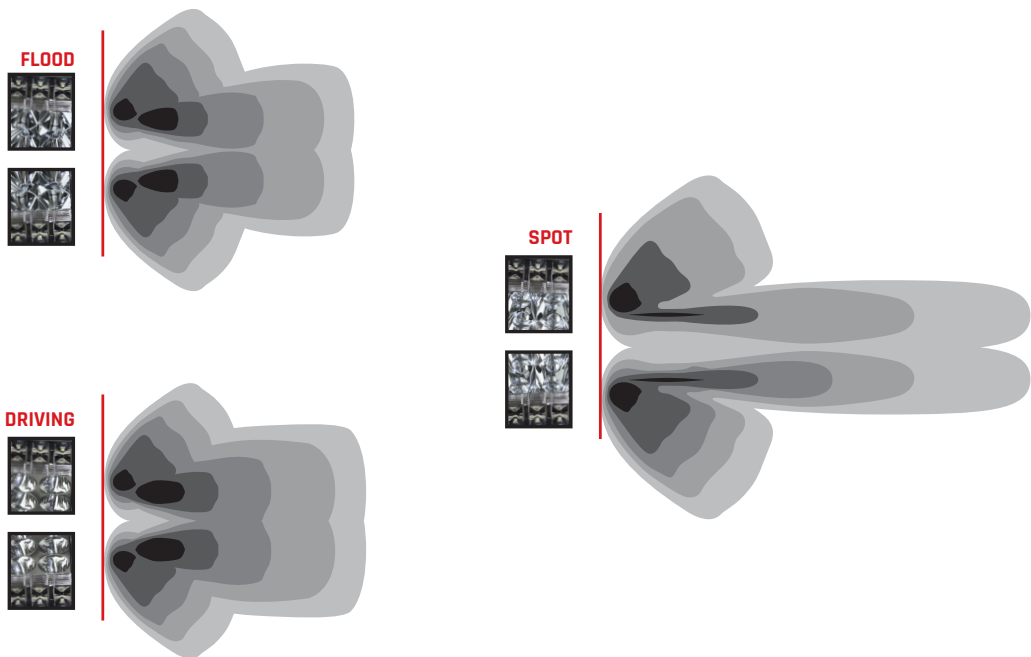



HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

## SINGLES

### SINGLES / SPECIFICATIONS

|                | MOUNT | BLACK SINGLE | WHITE SINGLE | WT. (LBS.) | WATTS | AMP DRAW @14VDC | LEDs | *NEW PRO RAW LUMENS | *ORIGINAL RAW LUMENS | A   | B   | C   | **PEAK BEAM INTENSITY(cd) |
|----------------|-------|--------------|--------------|------------|-------|-----------------|------|---------------------|----------------------|-----|-----|-----|---------------------------|
| <b>FLOOD</b>   | SM    | 261113       | 861113       | 1.22       | 54    | 3.86            | 8    | 6336                | 2793                 | 60  | 77  | 155 | 6070                      |
| <b>SPOT</b>    | SM    | 261213       | 861213       | 1.22       | 54    | 3.86            | 8    | 6336                | 2793                 | 652 | 255 | 510 | 65241                     |
| <b>DRIVING</b> | SM    | 261313       | 861313       | 1.22       | 57    | 4.07            | 10   | 7920                | 3675                 | 219 | 148 | 296 | 21936                     |

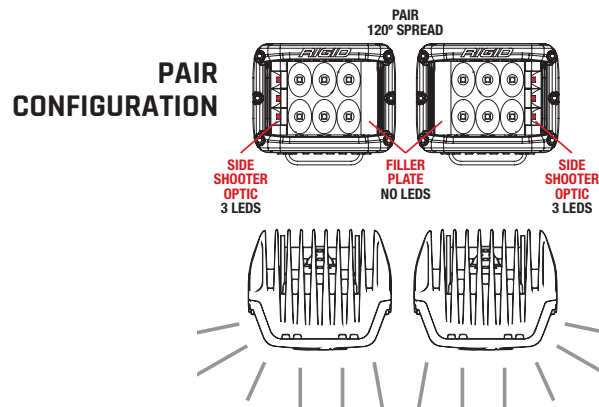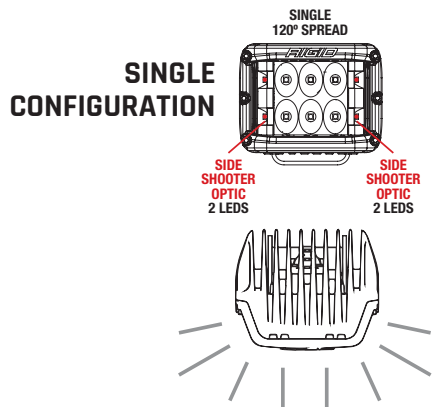

## PAIRS

SPECIFICATIONS ARE DISPLAYED PER SINGLE LIGHT

### PAIRS / SPECIFICATIONS

|                | MOUNT | BLACK PAIR | WHITE PAIR | WT. (LBS.) | WATTS | AMP DRAW @14VDC | LEDs | *NEW PRO RAW LUMENS | *ORIGINAL RAW LUMENS | A   | B   | C   | **PEAK BEAM INTENSITY(cd) |
|----------------|-------|------------|------------|------------|-------|-----------------|------|---------------------|----------------------|-----|-----|-----|---------------------------|
| <b>FLOOD</b>   | SM    | 262113     | 862113     | 2.44       | 47    | 3.36            | 7    | 5544                | 2425                 | 71  | 84  | 168 | 7129                      |
| <b>SPOT</b>    | SM    | 262213     | 862213     | 2.44       | 47    | 3.36            | 7    | 5544                | 2425                 | 652 | 255 | 510 | 65241                     |
| <b>DRIVING</b> | SM    | 262313     | 862313     | 2.44       | 72    | 5.14            | 9    | 7128                | 3308                 | 281 | 167 | 335 | 28108                     |

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.  
(SM) = Surface Mount



## LIGHTS COME WITH

- Lights come as Singles or Pairs
- Mounting Hardware
- Stainless Steel, U-Shape Bracket
- Harness w/Switch
- Deutsch Connector

# RADIANCE CURVED™ PLUS

The RIGID Radiance Curved Plus light bar is the perfect solution for those who want RIGID's legendary quality at a level everyone can attain. Featuring improved LED technology, the Radiance Curved Plus offers more light output than ever before while consuming a fraction of the power compared to incandescent lighting. The RIGID Radiance Curved Plus is built with the same high-grade aluminum alloy housing as our legendary RDS-Series, but that's where the visual similarities end. Inside, the Radiance Curved Plus is feature packed, with a black exposed printed circuit board, optimized forward projecting Broad Spot optics which combine the attributes of a spot and flood beam pattern, and recent updates in LED technology that boast up to 7128 raw lumens in the 20" size. Further, the Radiance Curved Plus has back-lighting available in white, amber, red, blue and green. The RIGID Radiance Curved Plus is for the customer who wants a truly custom look that only RIGID can provide. Even better, the Radiance Curved Plus now includes a Multi-Trigger Harness designed specifically for the Radiance Curved Plus. The Radiance Curved Plus Multi-Trigger Harness also comes standard with two separate backlit LED rocker switches (red and blue), so each circuit can be used independently. Radiance Curved Plus Light Bars are available in 20" - 54" lengths.



**BACK-LIGHTING  
AVAILABLE  
IN 5 COLORS**




"Consult your Rigid Industries' installation manual, the Rigid Industries' website and any local, state and federal laws, rules and regulations to determine whether your particular application/installation is authorized for use on a public highway."



## FEATURES

- 50,000+ Hour Lifespan
- 10-15 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F - +145° F / -40° C - +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- E-Series Construction & Durability
- Complete Multi-Switch Wiring Harness Included
- Independently Controlled Back-Lighting Available in White, Amber, Red, Blue or Green
- Dedicated Wire to Run Back-Lighting without Primary LEDs
- Black Powder Coated Mounting Brackets
- Black Exposed Circuit Board
- Patent-Pending Technology

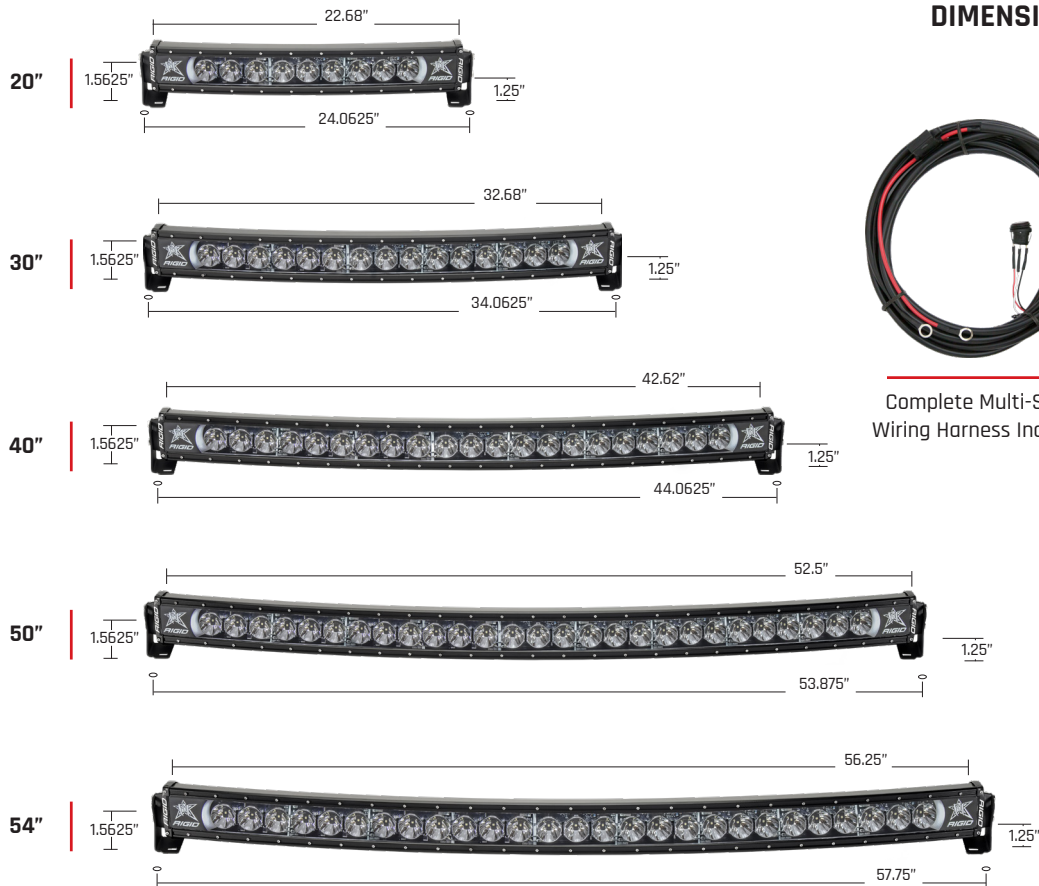

## DIMENSIONS



Complete Multi-Switch Wiring Harness Included


WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?



## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.

### BROAD SPOT OPTIC

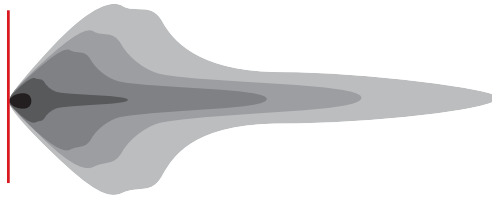

The RDS Output Technology™  
(U.S. Patent No. D713,574 & U.S. Patent No. 6,986,593)





HOW MUCH  
OUTPUT DO  
I NEED?

SPECIFICATIONS



|                             | SIZE | BLACK PART NO. | WT (LBS.) | WATTS | AMP DRAW @ 14VDC | LEDs | *RAW LUMENS |
|-----------------------------|------|----------------|-----------|-------|------------------|------|-------------|
| <b>WHITE<br/>BACK LIGHT</b> | 20"  | 32000          | 6.31      | 92    | 6.57             | 9    | 7128        |
|                             | 30"  | 33000          | 8.99      | 155   | 11.07            | 15   | 11880       |
|                             | 40"  | 34000          | 12.40     | 204   | 14.57            | 21   | 16632       |
|                             | 50"  | 35000          | 14.26     | 243   | 17.36            | 27   | 21384       |
|                             | 54"  | 36000          | 16.07     | 243   | 17.36            | 27   | 21384       |
| <b>BLUE<br/>BACK LIGHT</b>  | 20"  | 32001          | 6.31      | 92    | 6.57             | 9    | 7128        |
|                             | 30"  | 33001          | 8.99      | 155   | 11.07            | 15   | 11880       |
|                             | 40"  | 34001          | 12.40     | 204   | 14.57            | 21   | 16632       |
|                             | 50"  | 35001          | 14.26     | 243   | 17.36            | 27   | 21384       |
|                             | 54"  | 36001          | 16.07     | 243   | 17.36            | 27   | 21384       |
| <b>RED<br/>BACK LIGHT</b>   | 20"  | 32002          | 6.31      | 92    | 6.57             | 9    | 7128        |
|                             | 30"  | 33002          | 8.99      | 155   | 11.07            | 15   | 11880       |
|                             | 40"  | 34002          | 12.40     | 204   | 14.57            | 21   | 16632       |
|                             | 50"  | 35002          | 14.26     | 243   | 17.36            | 27   | 21384       |
|                             | 54"  | 36002          | 16.07     | 243   | 17.36            | 27   | 21384       |
| <b>GREEN<br/>BACK LIGHT</b> | 20"  | 32003          | 6.31      | 92    | 6.57             | 9    | 7128        |
|                             | 30"  | 33003          | 8.99      | 155   | 11.07            | 15   | 11880       |
|                             | 40"  | 34003          | 12.40     | 204   | 14.57            | 21   | 16632       |
|                             | 50"  | 35003          | 14.26     | 243   | 17.36            | 27   | 21384       |
|                             | 54"  | 36003          | 16.07     | 243   | 17.36            | 27   | 21384       |
| <b>AMBER<br/>BACK LIGHT</b> | 20"  | 32004          | 6.31      | 92    | 6.57             | 9    | 7128        |
|                             | 30"  | 33004          | 8.99      | 155   | 11.07            | 15   | 11880       |
|                             | 40"  | 34004          | 12.40     | 204   | 14.57            | 21   | 16632       |
|                             | 50"  | 35004          | 14.26     | 243   | 17.36            | 27   | 21384       |
|                             | 54"  | 36004          | 16.07     | 243   | 17.36            | 27   | 21384       |

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.



LIGHTS COME WITH

- Mounting Hardware
- Black Powder Coated, L-Shape Brackets
- Open Leads, No Connector
- 2ft Wire Extension (20" - 50")
- Complete Multi-Switch Wiring Harness PN 40200

# RADIANCE™ PLUS

The RIGID Radiance Plus light bar is the perfect solution for those who want RIGID's legendary quality at a level everyone can attain. Featuring improved LED technology, the Radiance Plus offers more light output than ever before while consuming a fraction of the power compared to incandescent lighting. The RIGID Radiance Plus is built with the same high-grade aluminum alloy housing as our legendary E-Series, but that's where the visual similarities end. Inside, the Radiance Plus light bar is feature-packed, with a black exposed printed circuit board, optimized forward projecting Broad Spot optics which combine the attributes of a spot and flood beam pattern, and recent updates in LED technology that boast up to 21,384 raw lumens. Further, the Radiance Plus has back-lighting available in white, amber, red, blue and green. The RIGID Radiance Plus light bar is for the customer who wants a truly custom look that only RIGID can provide. Even better, the Radiance Plus now includes a Multi-Trigger Harness designed specifically for the Radiance Plus light bar. The Radiance Multi-Trigger Harness also comes standard with two separate backlit LED rocker switches (red and blue), so each circuit can be used independently. Radiance Plus Light Bars are available in 10" - 50" lengths.



**BACK-LIGHTING  
AVAILABLE  
IN 5 COLORS**




"Consult your Rigid Industries' installation manual, the Rigid Industries' website and any local, state and federal laws, rules and regulations to determine whether your particular application/installation is authorized for use on a public highway."



## FEATURES

- 50,000+ Hour Lifespan
- 10-15 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F - +145° F / -40° C - +60° C
- Protected Against RFI / EMI
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- E-Series Construction & Durability
- Complete Multi-Switch Wiring Harness Included
- Independently Controlled Back-Lighting Available in White, Amber, Red, Blue or Green
- Dedicated Wire to Run Back-Lighting without Primary LEDs
- Black Powder Coated Mounting Brackets
- Black Exposed Circuit Board
- Patent-Pending Technology

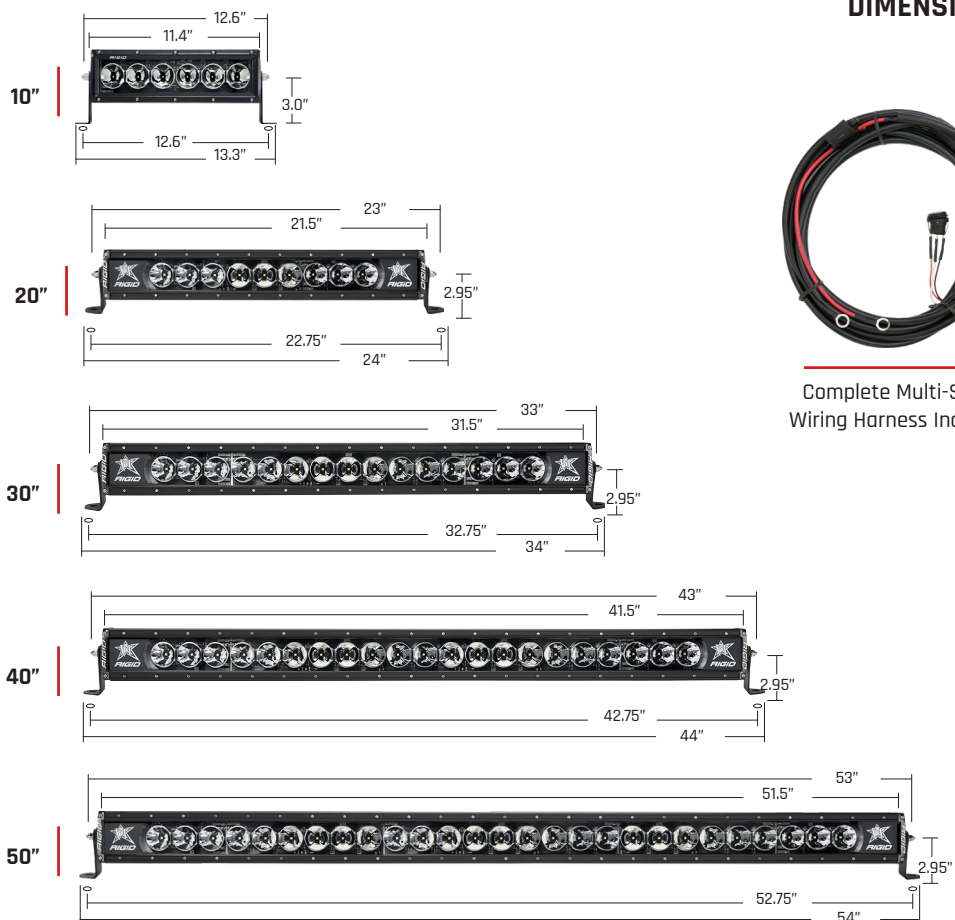



WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?



## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.

### BROAD SPOT OPTIC

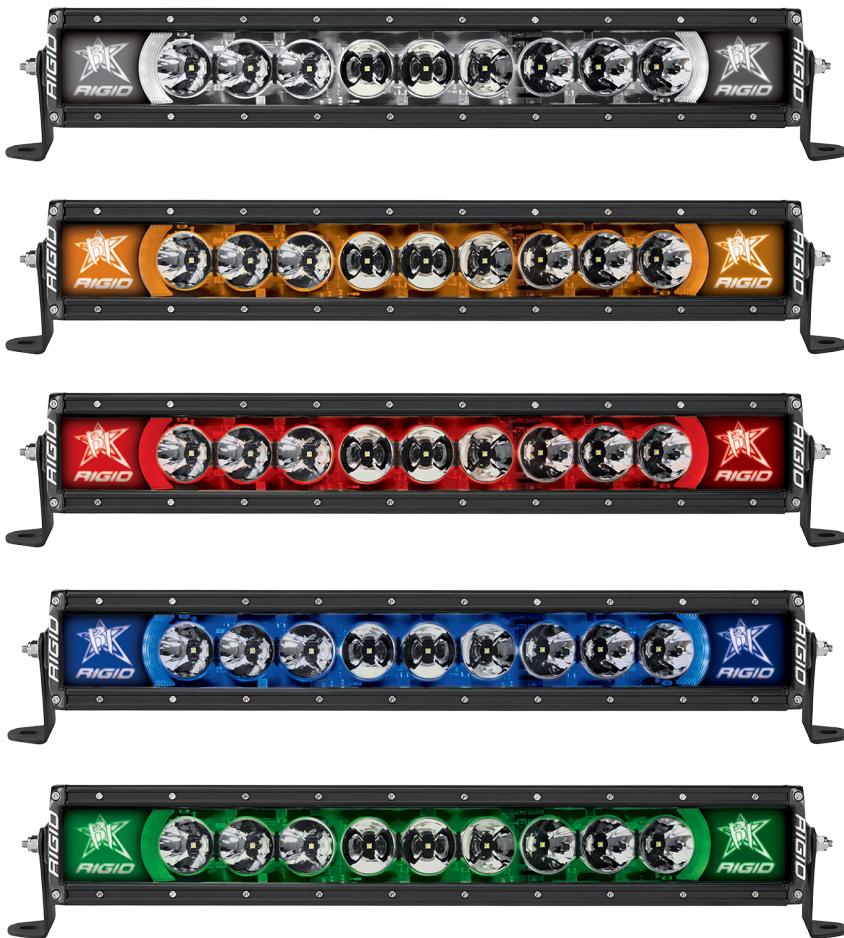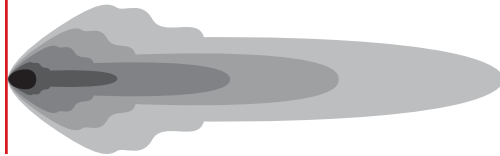

HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

**SPECIFICATIONS**



|                             | SIZE | BLACK PART NO. | WT (LBS.) | WATTS | AMP DRAW @ 14VDC | LEDs | *NEW PRO RAW LUMENS | *ORIGINAL RAW LUMENS | A    | B   | C    | **PEAK BEAM INTENSITY(cd) |
|-----------------------------|------|----------------|-----------|-------|------------------|------|---------------------|----------------------|------|-----|------|---------------------------|
| <b>WHITE<br/>BACK LIGHT</b> | 10"  | 210003         | 4.12      | 70    | 5                | 6    | 4572                | 3528                 | 835  | 289 | 578  | 83499                     |
|                             | 20"  | 220003         | 7.65      | 92    | 6.57             | 9    | 7128                | 5292                 | 1295 | 359 | 719  | 129536                    |
|                             | 30"  | 230003         | 10.55     | 155   | 11.07            | 15   | 11880               | 8820                 | 1991 | 446 | 892  | 199108                    |
|                             | 40"  | 240003         | 13.61     | 204   | 14.57            | 21   | 16632               | 12348                | 2595 | 509 | 1019 | 259599                    |
|                             | 50"  | 250003         | 16.84     | 243   | 17.36            | 27   | 21384               | 15876                | 3015 | 349 | 1098 | 301509                    |
| <b>BLUE<br/>BACK LIGHT</b>  | 10"  | 210013         | 4.12      | 70    | 5                | 6    | 4572                | 3528                 | 835  | 289 | 578  | 83499                     |
|                             | 20"  | 220013         | 7.65      | 92    | 6.57             | 9    | 7128                | 5292                 | 1295 | 359 | 719  | 129536                    |
|                             | 30"  | 230013         | 10.55     | 155   | 11.07            | 15   | 11880               | 8820                 | 1991 | 446 | 892  | 199108                    |
|                             | 40"  | 240013         | 13.61     | 204   | 14.57            | 21   | 16632               | 12348                | 2595 | 509 | 1019 | 259599                    |
|                             | 50"  | 250013         | 16.84     | 243   | 17.36            | 27   | 21384               | 15876                | 3015 | 349 | 1098 | 301509                    |
| <b>RED<br/>BACK LIGHT</b>   | 10"  | 210023         | 4.12      | 70    | 5                | 6    | 4572                | 3528                 | 835  | 289 | 578  | 83499                     |
|                             | 20"  | 220023         | 7.65      | 92    | 6.57             | 9    | 7128                | 5292                 | 1295 | 359 | 719  | 129536                    |
|                             | 30"  | 230023         | 10.55     | 155   | 11.07            | 15   | 11880               | 8820                 | 1991 | 446 | 892  | 199108                    |
|                             | 40"  | 240023         | 13.61     | 204   | 14.57            | 21   | 16632               | 12348                | 2595 | 509 | 1019 | 259599                    |
|                             | 50"  | 250023         | 16.84     | 243   | 17.36            | 27   | 21384               | 15876                | 3015 | 349 | 1098 | 301509                    |
| <b>GREEN<br/>BACK LIGHT</b> | 10"  | 210033         | 4.12      | 70    | 5                | 6    | 4572                | 3528                 | 835  | 289 | 578  | 83499                     |
|                             | 20"  | 220033         | 7.65      | 92    | 6.57             | 9    | 7128                | 5292                 | 1295 | 359 | 719  | 129536                    |
|                             | 30"  | 230033         | 10.55     | 155   | 11.07            | 15   | 11880               | 8820                 | 1991 | 446 | 892  | 199108                    |
|                             | 40"  | 240033         | 13.61     | 204   | 14.57            | 21   | 16632               | 12348                | 2595 | 509 | 1019 | 259599                    |
|                             | 50"  | 250033         | 16.84     | 243   | 17.36            | 27   | 21384               | 15876                | 3015 | 349 | 1098 | 301509                    |
| <b>AMBER<br/>BACK LIGHT</b> | 10"  | 210043         | 4.12      | 70    | 5                | 6    | 4572                | 3528                 | 835  | 289 | 578  | 83499                     |
|                             | 20"  | 220043         | 7.65      | 92    | 6.57             | 9    | 7128                | 5292                 | 1295 | 359 | 719  | 129536                    |
|                             | 30"  | 230043         | 10.55     | 155   | 11.07            | 15   | 11880               | 8820                 | 1991 | 446 | 892  | 199108                    |
|                             | 40"  | 240043         | 13.61     | 204   | 14.57            | 21   | 16632               | 12348                | 2595 | 509 | 1019 | 259599                    |
|                             | 50"  | 250043         | 16.84     | 243   | 17.36            | 27   | 21384               | 15876                | 3015 | 349 | 1098 | 301509                    |

\* Raw Lumens is based on LED manufacturer specifications. \*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.



**LIGHTS COME WITH**

- Mounting Hardware
- Black Powder Coated, L-Shape Brackets
- Open Leads, No Connector
- 2ft Wire Extension (20" - 50")
- Complete Multi-Switch Wiring Harness PN 40200

# RADIANCE POD™

RIGID's innovative Radiance line continues to expand with the Radiance Pod, a unique lighting solution that offers RIGID's legendary quality at a level everyone can attain. A compact cube similar to RIGID's popular D-Series, the Radiance Pod features independently controlled back-lighting that is available in white, amber, green, red, or blue. The Radiance Pod is built with a rugged aluminum alloy housing to protect the three powerful LEDs inside, while a black exposed circuit board is visible through the durable polycarbonate lens for a unique industrial look. The Radiance Pod is sold in pairs and includes mounting brackets suitable for attachment to any flat surface.



\*Consult your Rigid Industries' installation manual, the Rigid Industries' website and any local, state and federal laws, rules and regulations to determine whether your particular application/installation is authorized for use on a public highway.\*





## FEATURES

- 50,000+ Hour Lifespan
- 10-15 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness (Sold Separately)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- D-Series Construction & Durability
- Complete Multi-Switch Wiring Harness Available (Sold Separately - Part Number 40300)
- Independently Controlled Back-Lighting Available in White, Amber, Red, Blue or Green
- Dedicated Wire to Run Back-Lighting without Primary LEDs
- Stainless Steel Mounting Brackets
- Black Exposed Circuit Board
- Patent-Pending Technology

## DIMENSIONS



### SURFACE MOUNT



Complete Multi-Switch Wiring Harness Available  
**Sold Separately - PN 40300**




WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?



## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.

**BROAD OPTIC**

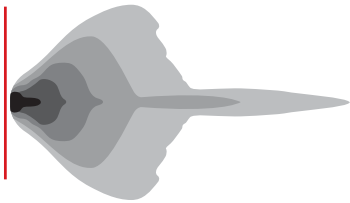



**HOW MUCH  
OUTPUT DO  
I NEED?**

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

**SPECIFICATIONS**



|                         | MOUNT | BLACK PAIR | WT. (LBS.) | WATTS | AMP DRAW @ 14V | LEDs | *RAW LUMENS | A   | B   | C   | **PEAK BEAM INTENSITY(cd) |
|-------------------------|-------|------------|------------|-------|----------------|------|-------------|-----|-----|-----|---------------------------|
| <b>WHITE BACK LIGHT</b> | SM    | 20200      | 1.5        | 15    | 1              | 3    | 900         | 125 | 112 | 224 | 12456                     |
| <b>BLUE BACK LIGHT</b>  | SM    | 20201      | 1.5        | 15    | 1              | 3    | 900         | 125 | 112 | 224 | 12456                     |
| <b>RED BACK LIGHT</b>   | SM    | 20202      | 1.5        | 15    | 1              | 3    | 900         | 125 | 112 | 224 | 12456                     |
| <b>GREEN BACK LIGHT</b> | SM    | 20203      | 1.5        | 15    | 1              | 3    | 900         | 125 | 112 | 224 | 12456                     |
| <b>AMBER BACK LIGHT</b> | SM    | 20204      | 1.5        | 15    | 1              | 3    | 900         | 125 | 112 | 224 | 12456                     |

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.



**LIGHTS COME WITH**

- Mounting Hardware
- Stainless Steel, U-Shape Brackets
- Open Leads, No Connector

**HARNESS SOLD SEPARATELY**

- Complete Multi-Switch Wiring Harness - PN 40300

# CHASE™

The RIGID Chase rear facing LED light adds safety and functionality to any UTV, rail, buggy, Jeep, or other off-road application by packing reverse, courtesy, strobe, running (low power), and brake lights (high power) into a single compact package. A halo of powerful colored LEDs in red, amber, or blue around the perimeter of the aluminum housing can be used as a strobe (for racing and chase applications), running light, or third brake light. The center portion of the RIGID Chase functions as a 715 lumen white light suitable for use as a reverse or area light, and there's also a smaller downward-facing courtesy light for illuminating the cargo area. Whether it's used individually or wired in series, the RIGID Chase LED light is packed with features at a great value.



AMBER



BLUE



RED



STROBE,  
COURTESY,  
REVERSE,  
RUNNING & BRAKE  
ALL IN ONE

5 MODES



STROBE



COURTESY



REVERSE



RUNNING




BRAKE



**FEATURES**

- 50,000+ Hour Lifespan
- 10-15 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP66 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Reverse Light and Courtesy Light
- Halo Features 3 Modes; Strobe, Running, Brake
- 3 Halo Color Options; Amber, Red, & Blue
- Universal 90° Mounting Bracket
- 1.75" - 2.00" Adjustable Tube Mount
- 5ft Multi-Trigger Lead for Versatile Configurations

**DIMENSIONS & MOUNTS**

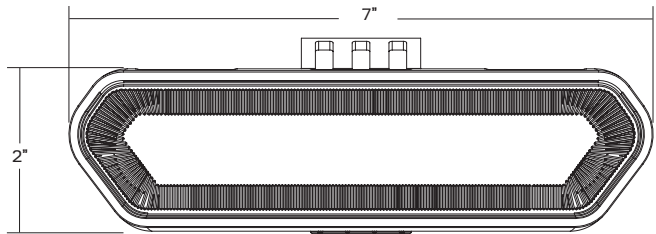


**SURFACE MOUNT**


Universal 90° Mount Included




TOP FRONT



TOP BACK



BOTTOM FRONT




BOTTOM BACK

MOUNTING OPTIONS

**ADJUSTABLE TUBE MOUNT**

Mount Included




FITS 1.75" - 2" TUBE

**COURTESY AND  
REVERSE BEAM  
PATTERNS**

**BEAM PATTERNS**

Unlike all of our other lights, the RIGID Chase does not have a forward-projecting light. But, the Chase does include both a courtesy and reverse light among its many features. The custom-designed graphs illustrate these beam patterns below.

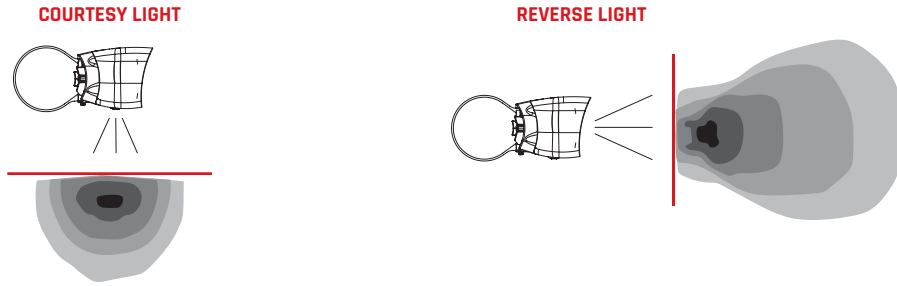

**MODES**



COURTESY



REVERSE



RUNNING



STROBE



BRAKE




CHOOSE YOUR  
COLOR OPTION  
AMBER, RED  
OR BLUE

## SPECIFICATIONS



|              | AMBER | RED   | BLUE  | MODE                  | WATTS | AMP DRAW @14VDC | *RAW LUMENS |
|--------------|-------|-------|-------|-----------------------|-------|-----------------|-------------|
| <b>CHASE</b> | 90122 | 90133 | 90144 | <b>COURTESY LIGHT</b> | 4.2   | 0.3             | 168         |
|              |       |       |       | <b>REVERSE LIGHT</b>  | 9.8   | 0.7             | 715         |

\* Raw Lumens is based on LED manufacturer specifications.

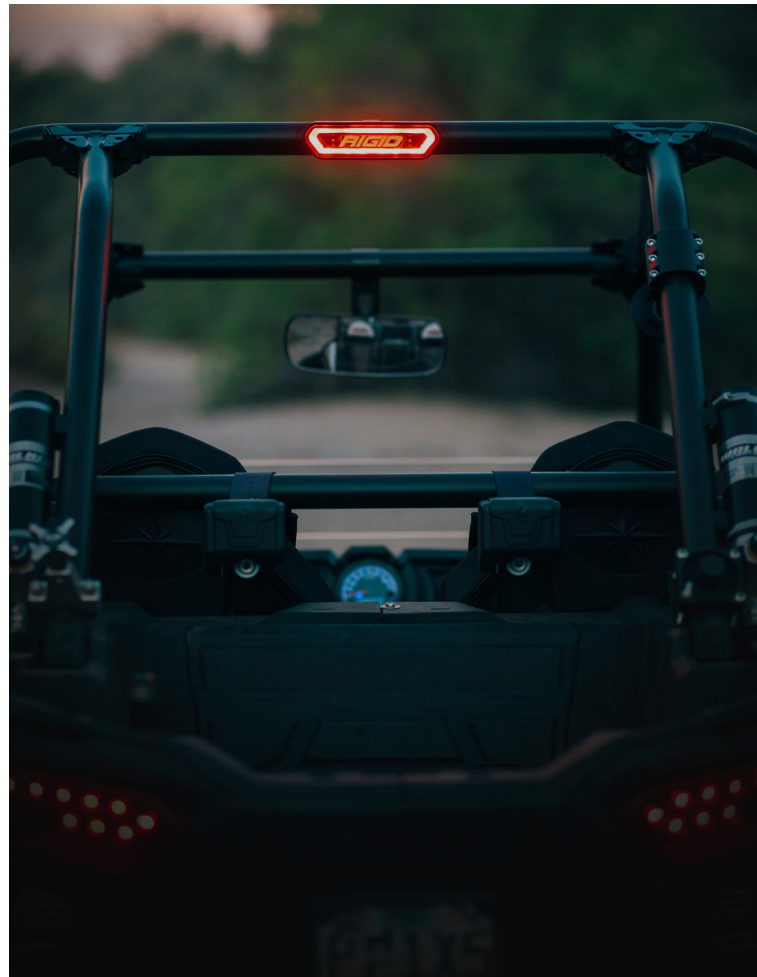

### LIGHTS COME WITH

- Mounting Hardware
- Black Powder Coated, L-Shape Bracket
- Black Powder Coated, Adjustable Tube Clamp
- Multi-Trigger Open Leads, No Connector
- 5ft Wire Extension

# REAR FACING HIGH/LOW

Not all off-road situations require the same light intensity. RIGID Rear Facing High & Low Dual Function LED Lights in Amber or Red provide the flexibility to adjust the lighting to the conditions with the flip of a switch. These lights feature a three-wire harness, and the High, Low, or Off three-position rocker switch gives the user an option to run at full intensity on High power, or 20% intensity on Low power. Use the Low intensity mode for a Low Powered running light and the High Powered as a braking light. The RIGID Rear Facing High & Low Dual Function LED Lights feature a thermally engineered oversized heat sink to provide superior cooling power and a 50,000-hour lifespan. If one-size-fits-all lighting works for your needs, then the RIGID Rear Facing High & Low Function LED Lights are the perfect choice for adapting to changing conditions.

A rear view of a vehicle, likely a motorcycle or scooter, with dual high/low function LED lights. The lights are illuminated in red. A red callout box points to the lights with the text "WITH A DUAL HIGH/ LOW FUNCTION". The vehicle has a license plate that reads "RIGID M" and "AZ 18A".

WITH A DUAL  
HIGH/ LOW  
FUNCTION



## FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant – Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant – Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)

FOR DIMENSIONS,  
REFER TO THE  
FOLLOWING SERIES

SR-M PRO  
SR-Q PRO  
D-Series PRO

## SPECIFICATIONS


|                                    | MOUNT | RED PAIR | AMBER PAIR |
|------------------------------------|-------|----------|------------|
| <b>SR-M SERIES<br/>REAR FACING</b> | SM    | 90173    | 90171      |
|                                    | FM    | 90174    | 90172      |
| <b>SR-Q SERIES<br/>REAR FACING</b> | SM    | 90163    | 90161      |
|                                    | FM    | 90164    | 90162      |
| <b>D-SERIES<br/>REAR FACING</b>    | SM    | 90153    | 90151      |
|                                    | FM    | 90154    | 90152      |

**REAR FACING  
SR-M SERIES  
SURFACE MOUNT**



**REAR FACING  
SR-M SERIES  
FLUSH MOUNT**

**REAR FACING  
SR-Q SERIES  
SURFACE MOUNT**



**REAR FACING  
SR-Q SERIES  
FLUSH MOUNT**


**REAR FACING  
D-SERIES  
SURFACE MOUNT**



**REAR FACING  
D-SERIES  
FLUSH MOUNT**

## BEAM PATTERNS (PAIR)

**DIFFUSED**  
Diffused lens



## LIGHTS COME WITH

- Mounting Hardware
- Stainless Steel, U-Shape Bracket (Excludes FM)
- Harness w/Switch
- Deutsch Connector
- Comes as a Pair

# REFLECT™

The RIGID Reflect is the first LED light that not only illuminates the road ahead, but also allows you to see what's behind. The RIGID Reflect is an advanced LED lighting solution with a fully adjustable side mirror all in one. Though originally developed for UTV and Powersports applications, the Reflect is a great solution for just about any off-road application. The Reflect uses RIGID's patented LED technology and new Side-Shooter optics to provide a wide beam of light for cornering and drifting. For even more versatility, there are also built-in amber LEDs on the outside edge of the fixture that can be used as turn signals, flashers, or even auxiliary running lights. The lights and mirror can be aimed independently, and tube mounting clamps are included to make installation easy. The RIGID Reflect is one more compact, versatile lighting solution that enables off-road enthusiasts to Own the Night™.









## FEATURES

- 50,000+ Hour Lifespan
- 9-32 VDC
- GORE® Pressure Equalizing Vent
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP69K Compliant - Dust / Water Ingress
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Light and Mirror Can Be Independently Adjusted
- Side Shooter Optic & Lenticular Lens for Enhanced Beam Width
- Integrated Amber LEDs for use as Running Lights or Turn Signal
- Fully Adjustable 1.75" - 2.00" Tube Mount Included
- Break Away Joint for Damage Prevention
- Convex Mirror for Enhanced Field of Vision
- 3-Wire Open Lead for Convenient Wiring
- Removable Trim Bezel - Can be Painted to Match the Color of Your Vehicle
- Angle Adjustment Ring for Mounting to Different Roll Cage Angles
- Bar Clamp Assembly Can be Removed to Mount Mirror to a Flat Surface

### LIGHT SIDE

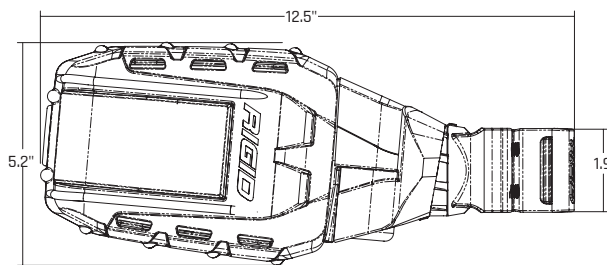

### MIRROR SIDE

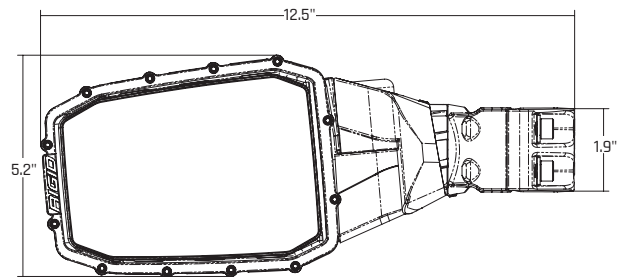


## DIMENSIONS



## BEAM PATTERNS (PAIR)



### HYBRID FLOOD



## LIGHTS COME WITH

- Mounting Hardware
- Adjustable Tube Clamp
- 3-Wire Open Leads, No Connector
- Comes as a Pair (Left Side & Right Side)

## SPECIFICATIONS



| MOUNT | BLACK PAIR | WT. (LBS.) | WATTS | AMP DRAW @14VDC | *RAW LUMENS | A  | B  | C   | **PEAK BEAM INTENSITY(cd) |
|-------|------------|------------|-------|-----------------|-------------|----|----|-----|---------------------------|
| SM    | 64011      | 3.15       | 33    | 2.3             | 3775        | 43 | 66 | 131 | 4300                      |

SPECIFICATIONS ARE DISPLAYED PER SINGLE LIGHT

# IGNITE™

The RIGID Ignite™ is the smallest, most versatile forward projecting light in RIGID's product line! Measuring approximately 1.4" x 1.4" x 2", this flexible light packs 1000 raw lumens using Spot, Flood or Diffused beam patterns; perfect for any application where short range light output is needed. The Ignite utilizes a Go-Pro® style mounting bracket which mates with an array of off the shelf Go-Pro mounts. Due to the wide range of mounting options, the Ignite's applications are almost limitless. The compact and lightweight housing makes the Ignite a great choice for auxiliary lighting on cars and trucks, motorcycles, UTVs, and even marine applications. Low current draw (less than 1 amp) and voltage requirements (7-28 volts) makes the Ignite adaptable to any application. Single light kits include one Ignite, mounting brackets, and related hardware. GoPro Mount Not Included.

RIGID Ignite lights are also available with a durable white finish. Though suitable for marine applications, RIGID's white lighting products are perfect for use anywhere an alternative to black is desired. The distinctive white is a durable UV-resistant powder coated finish with an additional chromate conversion coating for superior corrosion resistance. They feature the same legendary lighting technology and superior build quality as the rest of RIGID's lighting products, providing reliable and efficient lighting on demand.



**UNIVERSAL  
GoPro® STYLE  
MOUNT  
DESIGN**



## FEATURES



- 50,000+ Hour Lifespan
- 7-24 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mount Included (Surface Mount Only)
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Surface Mount; Mates To Any Go-Pro® Case Mount
- Universal Go-Pro-Style Mount Design
- 2-Wire Open Lead for any 7-24 V DC Application

## DIMENSIONS & MOUNTS



ALL HOUSINGS AVAILABLE IN WHITE



### SURFACE MOUNT



### FLUSH MOUNT



WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?




## BEAM PATTERNS


Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.

### FLOOD DIFFUSED


Flood optic behind diffused lens



### FLOOD



### SPOT

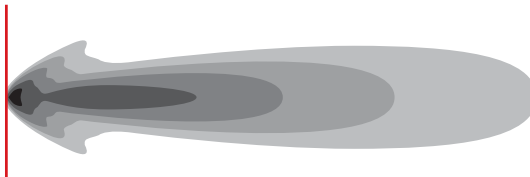

HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

## SPECIFICATIONS



|                           | MOUNT | BLACK SINGLE | BLACK PAIR | WHITE SINGLE | WHITE PAIR | WT. (LBS.) | WATTS | AMP DRAW @14VDC | LEDs | *RAW LUMENS | A   | B   | C   | **PEAK BEAM INTENSITY(cd) |
|---------------------------|-------|--------------|------------|--------------|------------|------------|-------|-----------------|------|-------------|-----|-----|-----|---------------------------|
| <b>FLOOD<br/>DIFFUSED</b> | SM    | 20531        | -          | 60531        | -          | 3.8        | 12    | 0.85            | 1    | 1000        | 9   | 29  | 60  | 885                       |
|                           | FM    | 20631        | -          | 60631        | -          | 3.8        | 12    | 0.85            | 1    | 1000        | 9   | 29  | 60  | 885                       |
| <b>FLOOD</b>              | SM    | 20521        | -          | 60521        | -          | 3.8        | 12    | 0.85            | 1    | 1000        | 18  | 42  | 80  | 1786                      |
|                           | FM    | 20621        | -          | 60621        | -          | 3.8        | 12    | 0.85            | 1    | 1000        | 18  | 42  | 80  | 1786                      |
| <b>SPOT</b>               | SM    | 20511        | -          | 60511        | -          | 3.8        | 12    | 0.85            | 1    | 1000        | 139 | 118 | 236 | 13939                     |
|                           | FM    | 20611        | -          | 60611        | -          | 3.8        | 12    | 0.85            | 1    | 1000        | 139 | 118 | 236 | 13939                     |

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.  
(SM) = Surface Mount, (FM) = Flush Mount



MATES  
WITH AN  
ARRAY  
OF MOUNTS



### LIGHTS COME WITH

- Mounting Hardware
- Black or White Mount (Surface Only)
- 2-Wire Open Leads, No Connector

# MIDNIGHT EDITION™ PRO

It's all about stealth with RIGID's new Midnight Optics. Utilizing our exclusive Spot Optic with a translucent black enamel coating, our Midnight Optics take the subtle "blacked out" look seriously; featuring black oxide hardware, to dark grey screen-printed and black embossed logos on the bezel. Midnight Optics enable RIGID to "disappear" during the day while still providing powerful LED technology to light up the night. Thanks to improved LED technology, the Midnight Edition PRO now offers more light output than ever before. Midnight Optics are available in E-Series PRO, RDS-Series PRO, SR-Series PRO, SR-M Series PRO, SR-Q SERIES PRO, and D-Series PRO product lines.



**LEGACY  
PRODUCTS  
WITH A DARK  
TWIST**





## FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F - +145° F / -40° C - +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Some Sizes Excluded)
- Translucent Black Enamel on our Patented Spot Optics
- All Black Assembly Hardware
- Special Black Polymer Coated Circuit Board
- Available in RDS-Series, E-Series, SR-Series, SR-M Series, SR-Q Series, and D-Series Lights



## DIMENSIONS



FOR DIMENSIONS,  
REFER TO THE  
FOLLOWING SERIES

RDS-Series Pro  
E-Series Pro  
SR-Series Pro  
D-Series Pro  
SR-M Series Pro  
SR-Q Series Pro

**MIDNIGHT  
EDITION  
SR-M SERIES PRO**



**MIDNIGHT  
EDITION  
SR-Q SERIES PRO**



**MIDNIGHT  
EDITION  
D-SERIES PRO**



### MIDNIGHT EDITION RDS-SERIES PRO



### MIDNIGHT EDITION E-SERIES PRO



### MIDNIGHT EDITION SR-SERIES PRO



WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?




## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.


### SPOT BLACK OPTIC



### SPOT BLACK OPTIC For RDS-Series PRO

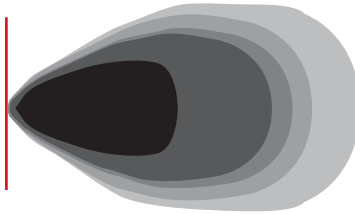

### SPOT DIFFUSED





HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

**SPECIFICATIONS**



|                                      | SIZE      | BLACK PART NO. | PAIR PART NO. | WT. (LBS.) | WATTS | AMP DRAW @14VDC | LEDs  | *New Pro RAW LUMENS | *Original RAW LUMENS | A    | B    | C      | **PEAK BEAM INTENSITY(cd) |
|--------------------------------------|-----------|----------------|---------------|------------|-------|-----------------|-------|---------------------|----------------------|------|------|--------|---------------------------|
| <b>D-SERIES PRO SPOT</b>             | SM        | 201213BLK      | 202213BLK     | 1.10       | 22    | 1.5             | 4     | 2508                | 1568                 | 448  | 211  | 423    | 44839                     |
|                                      | FM        | 211213BLK      | 212213BLK     | 1.17       | 22    | 1.5             | 4     | 2508                | 1568                 | 448  | 211  | 423    | 44839                     |
| <b>D-SERIES PRO SPOT DIFFUSED</b>    | SM        | -              | 202513BLK     | 1.1        | 30    | 2.1             | 4     | 1411                | -                    | 9.13 | 30.2 | 60.4   | 913                       |
|                                      | FM        | -              | 212513BLK     | 1.17       | 30    | 2.1             | 4     | 1411                | -                    | 9.13 | 30.2 | 60.4   | 913                       |
| <b>SR-M SERIES PRO SPOT DIFFUSED</b> | SM        | -              | 902513BLK     | 0.476      | 10    | 0.7             | 2     | 705.6               | -                    | 11.8 | 34.4 | 68.7   | 1180                      |
|                                      | FM        | -              | 922513BLK     | 0.588      | 10    | 0.7             | 2     | 705.6               | -                    | 11.8 | 34.4 | 68.7   | 1180                      |
| <b>SR-Q SERIES PRO SPOT DIFFUSED</b> | SM        | -              | 905513BLK     | 0.75       | 29    | 2.1             | 4     | 1411                | -                    | 12   | 34.7 | 69.3   | 1202                      |
|                                      | FM        | -              | 925513BLK     | 0.90       | 29    | 2.1             | 4     | 1411                | -                    | 12   | 34.7 | 69.3   | 1202                      |
| <b>E-SERIES PRO SPOT</b>             | 4"        | 104213BLK      | -             | 2.01       | 56    | 4.36            | 8     | 6336                | 3000                 | 803  | 283  | 566    | 80301                     |
|                                      | 6"        | 106213BLK      | -             | 2.84       | 89    | 6.36            | 12    | 9504                | 4500                 | 1308 | 361  | 723    | 130841                    |
|                                      | 10"       | 110213BLK      | -             | 4.12       | 183   | 13.07           | 20    | 15840               | 5740                 | 2109 | 459  | 918    | 210947                    |
|                                      | 20"       | 120213BLK      | -             | 6.10       | 214   | 15.3            | 40    | 25080               | 9200                 | 3340 | 578  | 1156   | 334029                    |
|                                      | 30"       | 130213BLK      | -             | 8.78       | 311   | 22.2            | 60    | 32700               | 13800                | 4154 | 640  | 1280   | 415413                    |
|                                      | 40"       | 140213BLK      | -             | 10.84      | 299   | 21.4            | 80    | 35680               | 18400                | 4219 | 650  | 1299   | 421872                    |
|                                      | 50"       | 150213BLK      | -             | 13.84      | 377   | 26.9            | 100   | 44600               | 23000                | 5864 | 766  | 1532   | 586474                    |
| <b>SR-SERIES PRO SPOT</b>            | 6"        | 906213BLK      | -             | 1.07       | 48    | 3.43            | 6     | 4752                | 2250                 | 598  | 244  | 489    | 59839                     |
|                                      | 10"       | 910213BLK      | -             | 1.72       | 61    | 4.36            | 10    | 7920                | 3750                 | 819  | 286  | 572    | 81959                     |
|                                      | 20"       | 920214BLK      | -             | 3.6        | 118   | 8.4             | 20    | 15840               | 7500                 | 1450 | 381  | 762    | 145006                    |
|                                      | 30"       | 930214BLK      | -             | 5.4        | 160   | 11.4            | 30    | 18810               | 11250                | 2081 | 456  | 912    | 208052                    |
|                                      | 40"       | 940214BLK      | -             | 7.04       | 259   | 18.5            | 40    | 25080               | 15000                | 2711 | 521  | 1041   | 271099                    |
| 50"                                  | 950214BLK | -              | 8.55          | 290        | 20.7  | 50              | 31350 | 18750               | 3341                 | 578  | 1156 | 334145 |                           |
| <b>RDS-SERIES PRO SPOT</b>           | 20"       | 882213BLK      |               | 6.6        | 234   | 16.72           | 40    | 31680               | 10460                |      |      |        |                           |
|                                      | 30"       | 883213BLK      |               | 9.2        | 277   | 19.8            | 60    | 47520               | 15690                |      |      |        |                           |
|                                      | 40"       | 884213BLK      |               | 12         | 314   | 22.44           | 80    | 63360               | 20920                |      |      |        |                           |
|                                      | 50"       | 885213BLK      |               | 18.25      | 393   | 28.05           | 100   | 79200               | 26150                |      |      |        |                           |
|                                      | 54"       | 886213BLK      |               | 20         | 453   | 32.34           | 108   | 85538               | 28242                |      |      |        |                           |

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.



**LIGHTS COME WITH**

- See RDS-SERIES PRO
- See E-SERIES PRO
- See SR-SERIES PRO
- See D-SERIES PRO
- See SR-Q SERIES PRO
- See SR-M SERIES PRO


# RIGID INDUSTRIES CAPTURE®

The RIGID Capture® is the world's only LED light with an integrated GoPro® charging system. The Capture combines a powerful light source with a docking station for GoPro® Hero 3+ or 4. High and low light output options provide just the right amount of light for any filming situation. The Capture also features an optimized light output and beam pattern for the GoPro® camera's field of view area with RIGID's patented radius housing and a lenticular lens design. The custom high quality Carling® switches provide a solid feel and clean look in your vehicle, while the amber lens covers will help your vision and video in adverse conditions. The Capture enables you to record your favorite on- or off-road excursions day or night.

## LIGHT COMES WITH



GoPro® Not Included.


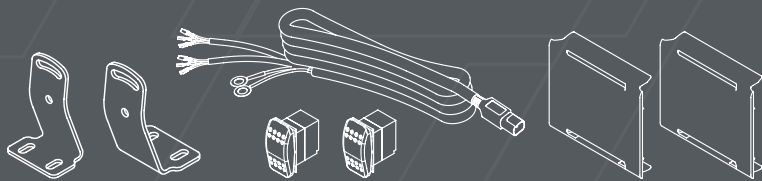


**RECORD.  
REVEAL.  
RELIVE.™**



## FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant – Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant – Shock / Vibration
- Waterproof Deutsch Connector (Black Housing Only)

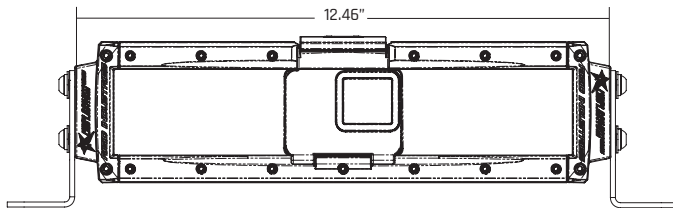

## DIMENSIONS

ALL HOUSINGS AVAILABLE IN WHITE



## LIGHTS COME WITH

- Mounting Hardware
- Wiring Harness
- 2 Carling Switches
- 2 Carling Switch Bezels
- 2 - 4" Amber Light Covers
- GoPro® NOT INCLUDED

### BLACK HOUSING ONLY

- 2 Black Powder Coated, L-Shape Brackets



### WHITE HOUSING ONLY

- 2 Stainless Steel, L-Shape Brackets

## BEAM PATTERN



LENTICULAR



## SPECIFICATIONS



A = LUX AT 10 METERS  
 B = BEAM DISTANCE (m) WITH 1 LUX  
 C = BEAM DISTANCE (m) WITH .25 LUX

|         | BLACK | WHITE | MODE | LEDS | WATTS | AMP DRAW @ 14VDC | *RAW LUMENS | A  | B  | C   | **PEAK BEAM INTENSITY(CD) |
|---------|-------|-------|------|------|-------|------------------|-------------|----|----|-----|---------------------------|
|         | 88100 | 88103 |      |      |       |                  |             | 82 | 91 | 181 |                           |
| Capture |       |       | HIGH | 16   | 63    | 4.38             | 5880        | 82 | 91 | 181 | 8184                      |
|         |       |       | LOW  | 16   | 13    | .90              | 1176        | 24 | 49 | 98  | 2379                      |



Made to be used with GoPro® Hero 3+ or 4 camera. GoPro® Not included.

\* Raw Lumens is based on LED manufacturer specifications. \*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.

# RDS-SERIES<sup>®</sup> PRO

RIGID revolutionized the lighting industry with the introduction of the RDS-Series, and recent advancements in LED technology have made them more powerful than ever before with the RDS-Series PRO. With an improved output of 85,538 raw lumens, the RDS-Series PRO projects more usable light exactly where it's needed on the road ahead. By taking an E-Series light bar and treating it to a gentle arc, the patented RDS-Series PRO provides a sleek, integrated look with the curved windshields and bumpers on today's trucks and SUVs. The curve is for more than just looks, it is also functional: the arc of the RDS-Series PRO light bars provides a wider spread of LED light, providing unmatched lighting coverage with a single light bar. RDS-Series PRO also includes updated branding and blacked-out circuit boards for a more refined look.




**CURVE YOUR  
EXCITEMENT.**





## FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)

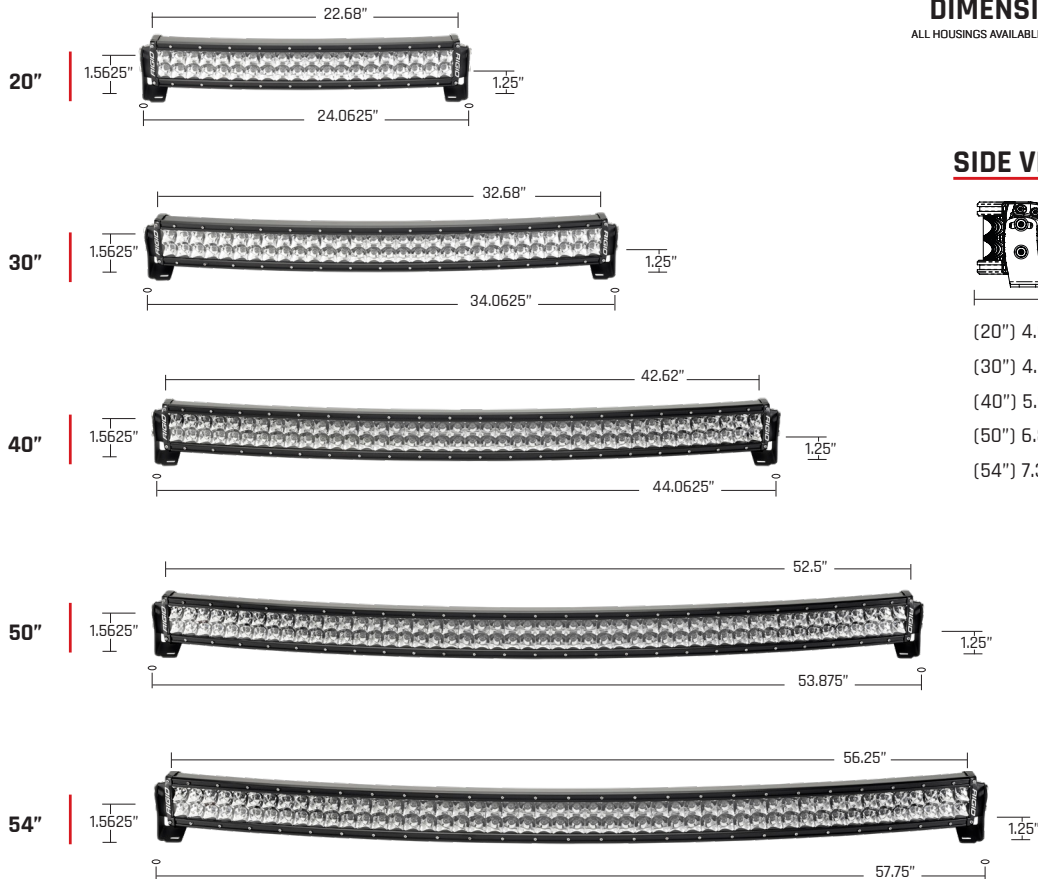

WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?




## BEAM PATTERNS & RDS PATENTED TECHNOLOGY

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.



The RDS Output Technology™  
(U.S. Patent No. D713,574 & U.S. Patent No. 6,986,593)

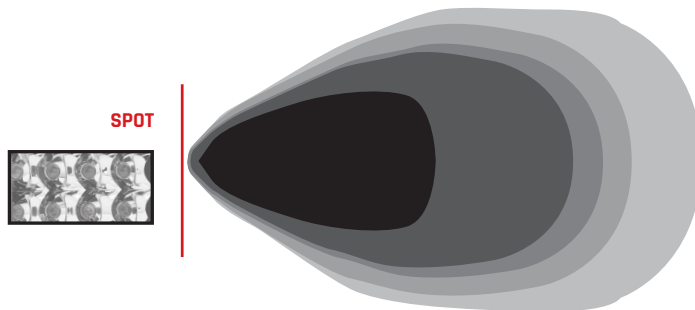

HOW MUCH  
OUTPUT DO  
I NEED?

**SPECIFICATIONS**



**SPOT**

| SIZE | BLACK PART NO. | WHITE PART NO. | WT (LBS.) | WATTS | AMP DRAW @ 14VDC | LEDs | *NEW PRO RAW LUMENS | *ORIGINAL RAW LUMENS |
|------|----------------|----------------|-----------|-------|------------------|------|---------------------|----------------------|
| 20"  | 882213         | 872213         | 6.31      | 234   | 16.72            | 40   | 31680               | 10460                |
| 30"  | 883213         | 873213         | 8.99      | 277   | 19.8             | 60   | 47520               | 15690                |
| 40"  | 884213         | 874213         | 12.40     | 314   | 22.44            | 80   | 63360               | 20920                |
| 50"  | 885213         | 875213         | 14.26     | 393   | 28.05            | 100  | 79200               | 26150                |
| 54"  | 886213         | 876213         | 16.07     | 453   | 32.34            | 108  | 85538               | 28242                |

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.



**LIGHTS COME WITH**

**BLACK HOUSING ONLY**

- 2 Black Powder Coated, L-shape brackets
- Open Leads, No Connector
- Harness w/Switch

**WHITE HOUSING ONLY**

- 2 Stainless Steel, L-shape brackets
- Open Leads, No Connector
- Harness w/Switch

# E-SERIES<sup>®</sup> PRO

The E-Series PRO is one of RIGID's most versatile, all-around lighting solutions, and recent enhancements in LED technology mean greater light output than ever before with the E-Series PRO. Among RIGID's most popular product lines, the E-Series PRO has recently benefited from several upgrades to improve both looks and performance. Plus, new branding and new blacked-out circuit boards give the E-Series PRO a more refined look. Available with your choice of optics, the E-Series PRO features a host of beam options, including Spot, Flood, Driving, Hyperspot, Diffused, and new Driving/Spot and Spot/Hyperspot combinations. These and other innovations make it one of the brightest and most efficient LED light bars on the market. The E-Series PRO was born in off-road, but its versatility makes it well suited for use with power sports, marine, general automotive and even first responder applications.












THE LIGHT  
THAT STARTED  
IT ALL





## FEATURES

- 50,000+ Hour Lifespan
- 9-36 V DC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant – Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant – Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)

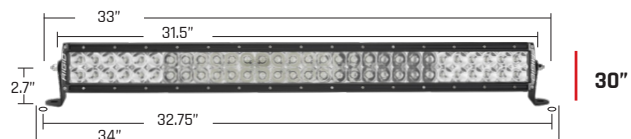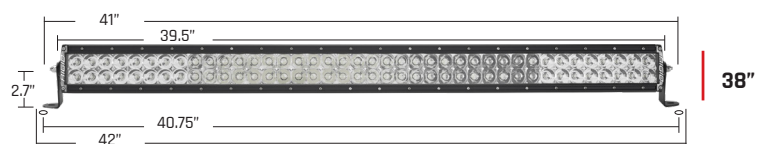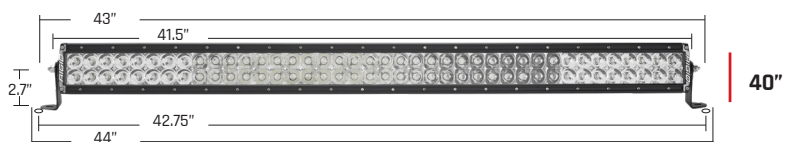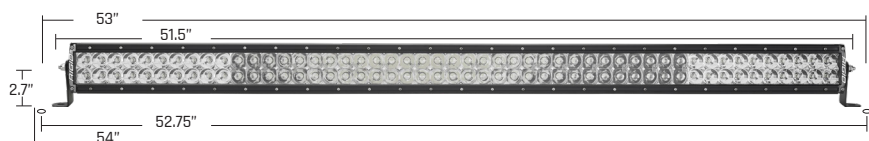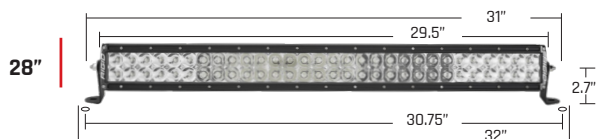

## DIMENSIONS

ALL HOUSINGS AVAILABLE IN WHITE




WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?




## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.


**FLOOD DIFFUSED**  
Flood optic behind diffused lens





**FLOOD**



**DRIVING DIFFUSED**  
Driving optic behind diffused lens



**DRIVING**




**SPOT**





**HYPERSPOT**



**SPOT/FLOOD  
COMBO**



**SPOT/DRIVING  
COMBO**

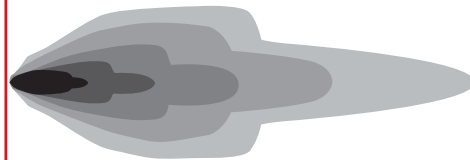

HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

**SPECIFICATIONS**



| OPTIC                     | SIZE | BLACK PART NO. | WHITE PART NO. | WT (LBS.) | WATTS | AMP DRAW @14VDC | LEDs | *NEW PRO RAW LUMENS | *ORIGINAL RAW LUMENS | A    | B   | C    | **PEAK BEAM INTENSITY(cd) |
|---------------------------|------|----------------|----------------|-----------|-------|-----------------|------|---------------------|----------------------|------|-----|------|---------------------------|
| FLOOD<br>DIFFUSED         | 4"   | 104513         | 804513         | 2         | 61    | 4.36            | 8    | 6336                | 3000                 | 28   | 53  | 106  | 2792                      |
|                           | 6"   | 106513         | 806513         | 2.84      | 81    | 5.79            | 12   | 9504                | 4500                 | 43   | 65  | 131  | 4271                      |
|                           | 10"  | 110513         | 810513         | 4.12      | 172   | 12.29           | 20   | 15840               | 5740                 | 72   | 85  | 170  | 7204                      |
| DRIVING<br>DIFFUSED       | 4"   | 173513         | 893513         | 2         | 92    | 6.57            | 12   | 9504                | 4500                 | 56   | 75  | 150  | 5601                      |
|                           | 6"   | 175513         | 895513         | 2.84      | 153   | 10.93           | 18   | 14256               | 6750                 | 82   | 90  | 181  | 8158                      |
|                           | 10"  | 178513         | 898513         | 4.12      | 206   | 14.71           | 30   | 18810               | 9000                 | 108  | 104 | 208  | 10807                     |
| FLOOD                     | 4"   | 104113         | 804113         | 2         | 61    | 4.36            | 8    | 6336                | 3000                 | 128  | 113 | 226  | 12815                     |
|                           | 6"   | 106113         | 806113         | 2.84      | 80    | 5.71            | 12   | 9504                | 4500                 | 166  | 129 | 258  | 16616                     |
|                           | 10"  | 110113         | 810113         | 4.12      | 185   | 13.21           | 20   | 15840               | 5740                 | 286  | 169 | 338  | 28575                     |
|                           | 20"  | 120113         | 820113         | 6.1       | 214   | 15              | 40   | 25080               | 9200                 | 497  | 223 | 446  | 49730                     |
|                           | 30"  | 130113         | 830113         | 8.78      | 311   | 22              | 60   | 32700               | 13800                | 699  | 264 | 529  | 69871                     |
|                           | 40"  | 140113         | 840113         | 10.84     | 299   | 21              | 80   | 35680               | 18400                | 789  | 281 | 562  | 78935                     |
| DRIVING                   | 4"   | 173613         | 893613         | 2         | 90    | 6.43            | 12   | 9504                | 4500                 | 546  | 234 | 467  | 54558                     |
|                           | 6"   | 175613         | 895613         | 2.84      | 160   | 11.43           | 18   | 14256               | 6750                 | 828  | 288 | 575  | 82750                     |
|                           | 10"  | 178613         | 898613         | 4.12      | 204   | 14.57           | 30   | 18810               | 9000                 | 960  | 310 | 620  | 96028                     |
|                           | 20"  | 121613         | 822613         | 6.1       | 340   | 24.3            | 60   | 47520               | 18000                | 2132 | 462 | 924  | 213244                    |
|                           | 4"   | 104213         | 804213         | 2         | 61    | 4.36            | 8    | 6336                | 3000                 | 1396 | 374 | 747  | 139654                    |
| SPOT                      | 6"   | 106213         | 806213         | 2.84      | 85    | 6.07            | 12   | 9504                | 4500                 | 2131 | 462 | 923  | 213058                    |
|                           | 10"  | 110213         | 810213         | 4.12      | 168   | 12              | 20   | 15840               | 5740                 | 3368 | 580 | 1160 | 336779                    |
|                           | 20"  | 120213         | 820213         | 6.1       | 156   | 11              | 40   | 20344               | 9200                 | 5690 | 754 | 1509 | 569046                    |
| SPOT/<br>HYPERSPOT        | 30"  | 130213         | 830213         | 8.78      | 305   | 22              | 60   | 26708               | 13800                | 8520 | 923 | 1846 | 851983                    |
|                           | 40"  | 140213         | 840213         | 10.84     | 306   | 22              | 80   | 31080               | 18400                | 9592 | 979 | 1959 | 959190                    |
|                           | 50"  | 150213         | 850213         | 13.84     | 373   | 27              | 100  | 38620               | 23000                | 9895 | 995 | 1989 | 989518                    |
| HYPERSPOT                 | 4"   | 173713         | -              | 2         | 40    | 2.90            | 8    | -                   | 3520                 | 1920 | 438 | 876  | 192000                    |
|                           | 6"   | 175713         | -              | 2.84      | 60    | 4.35            | 12   | -                   | 5280                 | 2920 | 540 | 1081 | 292000                    |
|                           | 10"  | 178713         | -              | 4.12      | 75    | 5.43            | 20   | -                   | 7500                 | 3880 | 623 | 1246 | 388000                    |
|                           | 20"  | 121713         | -              | 6.15      | 150   | 10.9            | 40   | -                   | 15000                | 7820 | 884 | 1769 | 782000                    |
| SPOT/<br>FLOOD<br>COMBO   | 6"   | 106313         | 806313         | 2.84      | 82    | 5.86            | 12   | 9504                | 6900                 | 829  | 288 | 576  | 82863                     |
|                           | 10"  | 110313         | 810313         | 4.12      | 165   | 11.79           | 20   | 15840               | 5740                 | 2003 | 448 | 895  | 200267                    |
|                           | 20"  | 120313         | 820313         | 6.1       | 214   | 15              | 40   | 25080               | 9200                 | 3898 | 624 | 1249 | 389784                    |
|                           | 28"  | 128313         | -              | 7.5       | 243   | 17              | 56   | 30520               | 12880                | 4219 | 650 | 1299 | 421893                    |
|                           | 30"  | 130313         | 830313         | 8.78      | 311   | 22              | 60   | 32700               | 13800                | 4746 | 689 | 1378 | 474648                    |
|                           | 38"  | 138313         | -              | 9.65      | 360   | 26              | 76   | 33896               | 17480                | 4929 | 702 | 1404 | 492876                    |
|                           | 40"  | 140313         | 840313         | 10.84     | 299   | 21              | 80   | 35680               | 18400                | 5134 | 716 | 1433 | 513412                    |
|                           | 50"  | 150313         | 850313         | 13.84     | 377   | 27              | 100  | 44600               | 23000                | 6308 | 794 | 1589 | 630822                    |
| SPOT/<br>DRIVING<br>COMBO | 10"  | 178313         | -              | 4.12      | 174   | 12.43           | 24   | 19008               | -                    | 2285 | 478 | 956  | 228502                    |
|                           | 20"  | 122313         | -              | 6.1       | 319   | 23              | 44   | 34848               | -                    | 5480 | 740 | 1481 | 548042                    |
|                           | 28"  | 127313         | -              | 7.5       | 355   | 25              | 64   | 34880               | -                    | 5758 | 759 | 1518 | 575786                    |
|                           | 30"  | 132313         | -              | 8.78      | 470   | 34              | 68   | 37060               | -                    | 5932 | 770 | 1540 | 593163                    |
|                           | 38"  | 137313         | -              | 9.65      | 365   | 26              | 88   | 39248               | -                    | 6808 | 825 | 1650 | 680841                    |
|                           | 40"  | 142313         | -              | 10.84     | 370   | 30              | 92   | 41032               | -                    | 7127 | 844 | 1688 | 712687                    |
|                           | 50"  | 152313         | -              | 13.84     | 448   | 32              | 112  | 49952               | -                    | 7537 | 868 | 1736 | 753666                    |

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.



**LIGHTS COME WITH**

**BLACK HOUSING ONLY**

- 2 Black Powder Coated, L-shape brackets
- Deutsch Connector (4"-10")
- Open Leads, No Connector (20"-50")
- Harness w/Switch

**WHITE HOUSING ONLY**

- 2 Stainless Steel, L-shape brackets
- Deutsch Connector (4"-10")
- Open Leads, No Connector (20"-50")
- Harness w/Switch

# SR-SERIES<sup>®</sup> PRO


The SR-Series PRO LED Light Bars provide a sleek, low profile lighting solution that measures less than 2" tall. Thanks to improved LED technology, the SR-Series PRO now offers more light output than ever before. As the name implies, the SR-Series PRO utilizes a single row of LEDs with your choice of optics in a variety of beam patterns. Ideal for applications where space is limited, the SR-Series PRO is a powerful light source designed to project light at extreme distances while consuming very little power. Available in a wide range of lengths and configurations, these LED light bars can be used on virtually any application, whether it's an off-road vehicle, industrial, agricultural, or marine.

RIGID's SR-Series PRO lights utilize extruded aluminum housings and are available with either a black or white durable powder coated finish. Along with improved LEDs for more output, the SR-Series PRO benefits from new branding and blacked-out circuit boards for a more refined look. They feature the same superior build quality as the rest of RIGID's lighting products, providing reliable and efficient lighting on demand.



**LOW PROFILE  
LIGHTING  
SOLUTION**






## FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant – Dust / Water Ingress
- 2 Mounting Brackets Included (1" and 3")
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant – Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)



## DIMENSIONS

ALL HOUSINGS AVAILABLE IN WHITE

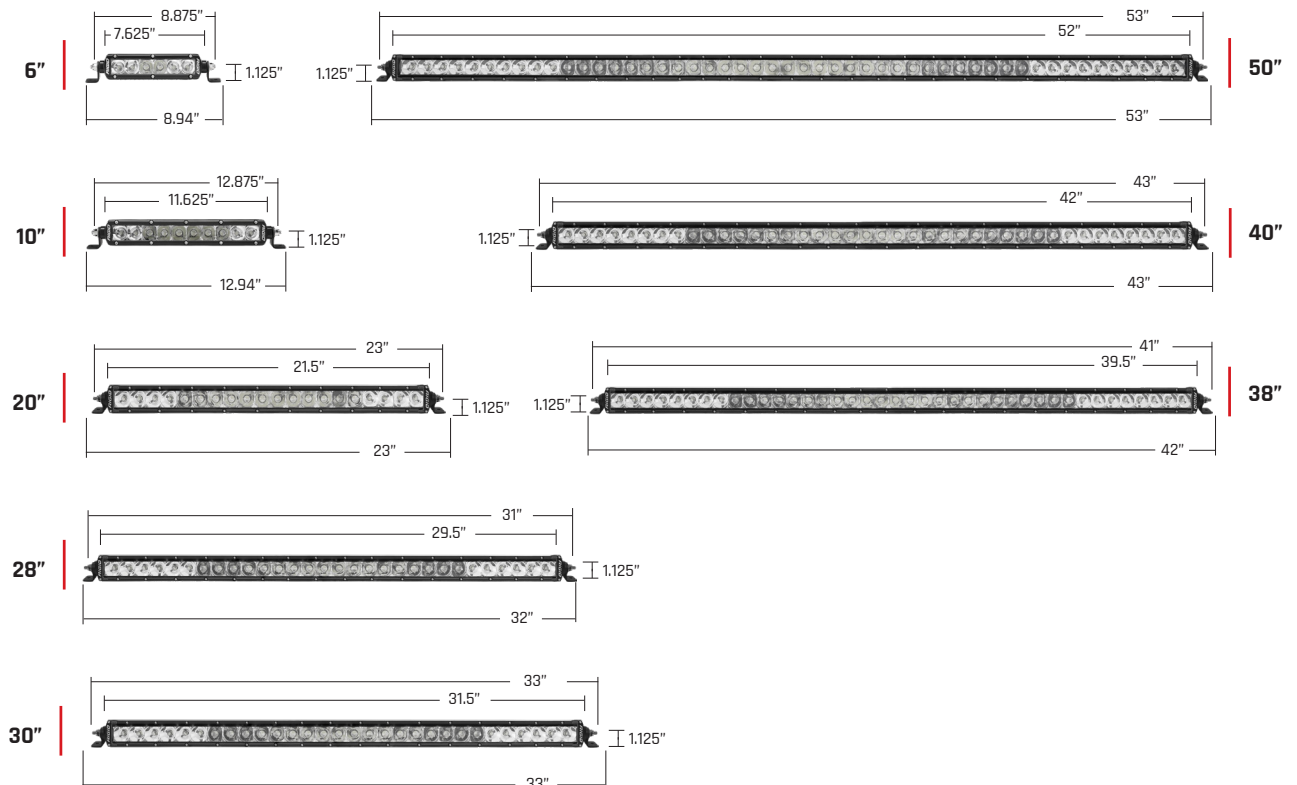


WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?




## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.


**FLOOD DIFFUSED**  
Flood optic behind diffused lens




**DRIVING DIFFUSED**  
Driving optic behind diffused lens



**FLOOD**



**DRIVING**



**SPOT**




**HYPERSPOT**



**SPOT/  
FLOOD COMBO**



**SPOT/DRIVING  
COMBO**

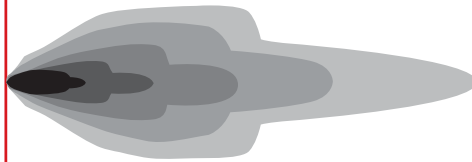

HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

**SPECIFICATIONS**



|                             | SIZE | BLACK PART NO. | WHITE PART NO. | WT (LBS.) | WATTS | AMP DRAW @ 14VDC | LEDs | *NEW PRO RAW LUMENS | *ORIGINAL RAW LUMENS | A    | B   | C    | **PEAK BEAM INTENSITY(cd) |
|-----------------------------|------|----------------|----------------|-----------|-------|------------------|------|---------------------|----------------------|------|-----|------|---------------------------|
| FLOOD<br>DIFFUSED           | 6"   | 906513         | 306513         | 1.07      | 47    | 3.36             | 6    | 4752                | 2250                 | 21   | 46  | 92   | 2126                      |
|                             | 10"  | 910513         | 310513         | 1.72      | 60    | 4.29             | 10   | 7920                | 3750                 | 32   | 57  | 114  | 3284                      |
| DRIVING<br>DIFFUSED         | 6"   | 906693         | 306693         | 1.07      | 69    | 4.93             | 9    | 7128                | 3375                 | 42   | 65  | 130  | 4191                      |
|                             | 10"  | 910693         | 310693         | 1.72      | 84    | 6.00             | 15   | 7524                | 5625                 | 57   | 75  | 151  | 5751                      |
| FLOOD                       | 6"   | 906113         | 306113         | 1.07      | 47    | 3.36             | 6    | 4752                | 2250                 | 103  | 101 | 203  | 10262                     |
|                             | 10"  | 910113         | 310113         | 1.72      | 60    | 4.29             | 10   | 7920                | 3750                 | 161  | 127 | 254  | 16143                     |
| DRIVING                     | 6"   | 906613         | 306613         | 1.07      | 69    | 4.93             | 9    | 7128                | 3375                 | 434  | 208 | 417  | 43409                     |
|                             | 10"  | 910613         | 310613         | 1.72      | 84    | 6.00             | 15   | 7524                | 5625                 | 593  | 243 | 487  | 59358                     |
|                             | 20"  | 921614         | -              | 3.62      | 123   | 8.88             | 30   | 23760               | 11250                | 1127 | 336 | 671  | 112662                    |
| SPOT                        | 6"   | 906213         | 306213         | 1.07      | 47    | 3.36             | 6    | 4752                | 2250                 | 1110 | 333 | 666  | 111004                    |
|                             | 10"  | 910213         | 310213         | 1.72      | 60    | 4.29             | 10   | 7920                | 3750                 | 1784 | 422 | 845  | 178368                    |
| HYPERSPOT                   | 6"   | 909713         | -              | 1.07      | 30.4  | 2.2              | 6    | -                   | 2640                 | 1310 | 362 | 724  | 131000                    |
|                             | 10"  | 911713         | -              | 1.72      | 35.9  | 2.6              | 10   | -                   | 3750                 | 1909 | 438 | 875  | 192000                    |
| SPOT/FLOOD<br>COMBO         | 6"   | 906313         | 306313         | 1.07      | 47    | 3.36             | 6    | 4752                | 2250                 | 443  | 211 | 421  | 44329                     |
|                             | 10"  | 910313         | 310313         | 1.72      | 60    | 4.29             | 10   | 7920                | 3750                 | 1123 | 335 | 670  | 112340                    |
|                             | 20"  | 920314         | 320314         | 3.62      | 119   | 8.5              | 20   | 15840               | 7500                 | 1989 | 446 | 892  | 198854                    |
|                             | 28"  | 928314         | -              | 5.1       | 164   | 11.81            | 28   | 17556               | -                    | 2612 | 511 | 1022 | 261180                    |
|                             | 30"  | 930314         | 330314         | 5.42      | 160   | 11.42            | 30   | 18810               | 11250                | 2968 | 545 | 1090 | 296841                    |
|                             | 38"  | 938314         | -              | 6.7       | 38    | 16.35            | 38   | 23826               | -                    | 3638 | 603 | 1206 | 1206                      |
|                             | 40"  | 940314         | 340314         | 7.04      | 259   | 18.5             | 40   | 25080               | 15000                | 3772 | 614 | 1228 | 377168                    |
| SPOT/<br>DRIVING<br>COMBO   | 50"  | 950314         | 350314         | 8.55      | 290   | 21               | 50   | 31350               | 18750                | 4347 | 659 | 1319 | 434698                    |
|                             | 10"  | 911313         | -              | 1.72      | 50    | 3.57             | 12   | 9504                | -                    | 904  | 300 | 601  | 90475                     |
|                             | 20"  | 921314         | -              | 3.62      | 132   | 9.42             | 22   | 17424               | -                    | 3053 | 553 | 892  | 305299                    |
|                             | 30"  | 931314         | -              | 5.42      | 205   | 14.64            | 34   | 21318               | -                    | 3802 | 617 | 1233 | 380181                    |
|                             | 40"  | 941314         | -              | 7.04      | 303   | 21.64            | 46   | 28842               | -                    | 4653 | 682 | 1364 | 465325                    |
| SPOT/<br>HYPERSPOT<br>COMBO | 50"  | 951314         | -              | 8.55      | 334   | 23.85            | 56   | 35112               | -                    | 5881 | 767 | 1534 | 588120                    |
|                             | 20"  | 920214         | -              | 3.62      | 132   | 9.42             | 20   | 10170               | -                    | 3053 | 553 | 1105 | 305299                    |
|                             | 30"  | 930214         | -              | 5.42      | 126   | 9                | 30   | 11758               | -                    | 3842 | 620 | 1240 | 384234                    |

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.



**LIGHTS COME WITH**

**BLACK HOUSING ONLY**

- 2-1", 2-3" Black Powder Coated, L-shape brackets
- Deutsch Connector (4"-10")
- Open Leads, No Connector (20"-50")
- Harness w/Switch

**WHITE HOUSING ONLY**

- 2-1", 2-3" Stainless Steel, L-shape brackets
- Deutsch Connector (4"-10")
- Open Leads, No Connector (20"-50")
- Harness w/Switch

# D-SERIES<sup>®</sup> PRO

The D-Series PRO has always been the most versatile compact lighting package on the market today. RIGID has just made it professional grade with the D-Series PRO, which offers more light output than ever before thanks to recent advancements in LED technology. Available with a variety of mounting options, including surface, flush, or heavy-duty, the D-Series PRO can be utilized for virtually any lighting application. Measuring just 3" x 3", the D-Series PRO packs a powerful punch up to 4,752 lumens depending on the optics chosen. Customers have used these versatile lights for reverse lights on a truck, a handlebar light for a motorcycle, flood lighting for a trailer, auxiliary lighting on agriculture and mining equipment, and many other applications that require a powerful, efficient light in a small space.

RIGID's D-Series PRO lights are available with either a black or white durable powder coated finish, and recent updates to the D-Series PRO include new branding and blacked-out circuit boards for a more refined look. They feature the same superior build quality as the rest of RIGID's lighting products, providing reliable and efficient lighting on demand.

**ADDITIONAL  
VEHICLE SPECIFIC  
MOUNTS SOLD  
SEPARATELY**







## FEATURES



- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F / +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)

## DIMENSIONS & MOUNTS



FLUSH AND SURFACE MOUNT AVAILABLE IN WHITE





### SURFACE MOUNT



### FLUSH MOUNT



### HEAVY DUTY MOUNT




WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?




## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.


**FLOOD DIFFUSED**  
Flood optic behind diffused lens




**FLOOD**




**DRIVING DIFFUSED**  
Driving optic behind diffused lens




**DRIVING**



**SPOT**

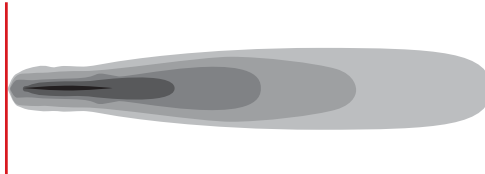

**HYPERSPOT**

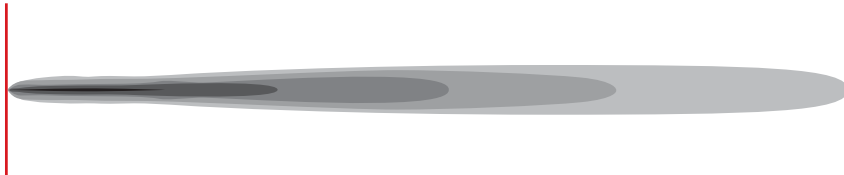

HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

**SPECIFICATIONS**



|                             | MOUNT | BLACK SINGLE | BLACK PAIR | WHITE SINGLE | WHITE PAIR | WT. (LBS.) | WATTS | AMP DRAW @14VDC | LEDs | * NEW PRO RAW LUMENS | *ORIGINAL RAW LUMENS | A   | B   | C   | **PEAK BEAM INTENSITY(cd) |
|-----------------------------|-------|--------------|------------|--------------|------------|------------|-------|-----------------|------|----------------------|----------------------|-----|-----|-----|---------------------------|
| <b>FLOOD<br/>DIFFUSED</b>   | SM    | 201513       | 202513     | 601513       | 602513     | 1.1        | 30    | 2.14            | 4    | 3168                 | 1568                 | 20  | 45  | 90  | 2060                      |
|                             | FM    | 211513       | 212513     | 611513       | 612513     | 1.17       | 30    | 2.14            | 4    | 3168                 | 1568                 | 20  | 45  | 90  | 2060                      |
|                             | HD    | 221513       | 222513     | -            | -          | 1.40       | 30    | 2.14            | 4    | 3168                 | 1568                 | 20  | 45  | 90  | 2060                      |
| <b>DRIVING<br/>DIFFUSED</b> | SM    | 501513       | 502513     | 701513       | 702513     | 1.1        | 44    | 3.14            | 6    | 4752                 | 3096                 | 29  | 53  | 107 | 2909                      |
|                             | FM    | 511513       | 512513     | 711513       | 712513     | 1.17       | 44    | 3.14            | 6    | 4752                 | 3096                 | 29  | 53  | 107 | 2909                      |
|                             | HD    | 521513       | 522513     | -            | -          | 1.40       | 44    | 3.14            | 6    | 4752                 | 3096                 | 29  | 53  | 107 | 2909                      |
| <b>FLOOD</b>                | SM    | 201113       | 202113     | 601113       | 602113     | 1.1        | 30    | 2.14            | 4    | 3168                 | 1568                 | 58  | 76  | 152 | 5819                      |
|                             | FM    | 211113       | 212113     | 611113       | 612113     | 1.17       | 30    | 2.14            | 4    | 3168                 | 1568                 | 58  | 76  | 152 | 5819                      |
|                             | HD    | 221113       | 222113     | -            | -          | 1.40       | 30    | 2.14            | 4    | 3168                 | 1568                 | 58  | 76  | 152 | 5819                      |
| <b>DRIVING</b>              | SM    | 501313       | 502313     | 701313       | 702313     | 1.1        | 44    | 3.14            | 6    | 4752                 | 3096                 | 231 | 152 | 304 | 23148                     |
|                             | FM    | 511313       | 512313     | 711313       | 712313     | 1.17       | 44    | 3.14            | 6    | 4752                 | 3096                 | 231 | 152 | 304 | 23148                     |
|                             | HD    | 521313       | 522313     | -            | -          | 1.40       | 44    | 3.14            | 6    | 4752                 | 3096                 | 231 | 152 | 304 | 23148                     |
| <b>SPOT</b>                 | SM    | 201213       | 202213     | 601213       | 602213     | 1.1        | 30    | 2.14            | 4    | 3168                 | 1568                 | 721 | 268 | 537 | 72197                     |
|                             | FM    | 211213       | 212213     | 611213       | 612213     | 1.17       | 30    | 2.14            | 4    | 3168                 | 1568                 | 721 | 268 | 537 | 72197                     |
|                             | HD    | 221213       | 222213     | -            | -          | 1.40       | 30    | 2.14            | 4    | 3168                 | 1568                 | 721 | 268 | 537 | 72197                     |
| <b>HYPERSPOT</b>            | SM    | 503713       | 504713     | -            | -          | 1.15       | 30    | 2.14            | 4    | 1760                 | 1760                 | 794 | 281 | 563 | 79456                     |

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.  
(SM) = Surface Mount, (FM) = Flush Mount, (HD) = All Black Heavy Duty



**LIGHTS COME WITH**

- Mounting Hardware
- Stainless Steel, U-Shape Bracket (Excludes FM)
- Vibration Isolators (Heavy Duty Surface Only)
- Harness w/Switch
- Deutsch Connector

# D-XL<sup>TM</sup> PRO

With the enormous popularity of the original D-Series came the need for a slightly larger, more powerful lighting solution. The RIGID D-XL PRO boasts more light than ever before in a housing that measures 4"x4". Recent improvements to the LEDs in the D-XL Series PRO improve light output to up to 9,504 raw lumens while maintaining the efficiency that is the hallmark of the entire RIGID product line. Featuring an unbreakable polycarbonate lens, durable UV-resistant polyester powder coat, stainless steel hardware, and a vibration isolator, the D-XL Series PRO is available with your choice of beam pattern. Recent updates include new RIGID branding and blacked-out circuit boards for a more refined look. Whether it's off-road, power sports, general automotive, mining, agriculture, or fire and rescue, the D-XL PRO is perfect for any application that requires a high intensity LED light.

**INCREASED LIGHT  
OUTPUT WHILE  
MAINTAINING  
EFFICIENCY**





## FEATURES



- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)

## DIMENSIONS & MOUNTS

ALL HOUSINGS AVAILABLE IN WHITE



## SURFACE MOUNT

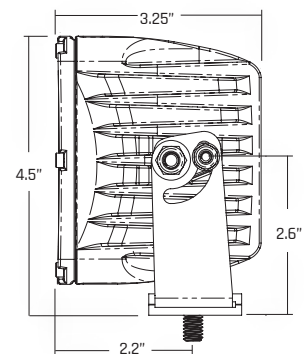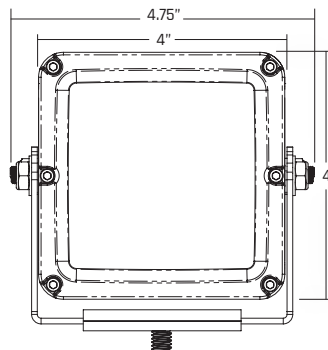



WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?




## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.



**FLOOD DIFFUSED**  
Flood optic behind diffused lens





**FLOOD**




**DRIVING DIFFUSED**  
Driving optic behind diffused lens




**DRIVING**



**SPOT**

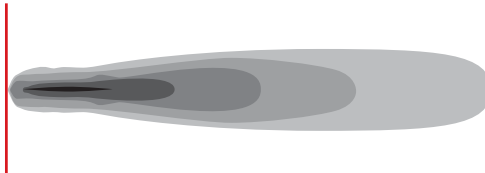

**HYPERSPOT**

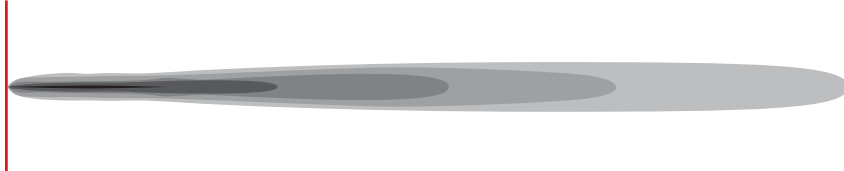

**HOW MUCH  
OUTPUT DO  
I NEED?**

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

**SPECIFICATIONS**



|                         | MOUNT | BLACK SINGLE | BLACK PAIR | WHITE SINGLE | WHITE PAIR | WT. (LBS.) | WATTS | AMP DRAW @ 14V | LEDs | *NEW PRO RAW LUMENS | *ORIGINAL RAW LUMENS | A    | B   | C   | **PEAK BEAM INTENSITY(cd) |
|-------------------------|-------|--------------|------------|--------------|------------|------------|-------|----------------|------|---------------------|----------------------|------|-----|-----|---------------------------|
| <b>FLOOD DIFFUSED</b>   | SM    | 321313       | 322313     | 323313       | 324313     | 1.81       | 67    | 4.79           | 9    | 7128                | 2646                 | 40   | 63  | 126 | 3980                      |
| <b>DRIVING DIFFUSED</b> | SM    | 321713       | 322713     | 323713       | 324713     | 1.81       | 88    | 6.29           | 12   | 9504                | 3969                 | 75   | 86  | 173 | 7454                      |
| <b>FLOOD</b>            | SM    | 321113       | 322113     | 323113       | 324113     | 1.81       | 69    | 4.93           | 9    | 7128                | 2646                 | 147  | 121 | 242 | 14681                     |
| <b>DRIVING</b>          | SM    | 321613       | 322613     | 323613       | 324613     | 1.81       | 89    | 6.36           | 12   | 9504                | 3969                 | 638  | 252 | 505 | 63841                     |
| <b>SPOT</b>             | SM    | 321213       | 322213     | 323213       | 324213     | 1.81       | 68    | 4.86           | 9    | 7128                | 2646                 | 1342 | 366 | 732 | 134226                    |
| <b>HYPERSPOT</b>        | SM    | 321413       | 322413     | -            | -          | 1.81       | 33    | 2.29           | 9    | -                   | 2646                 | 2081 | 456 | 912 | 208186                    |

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards. (SM) = Surface Mount



**LIGHTS COME WITH**

- Mounting Hardware
- Stainless Steel, U-Shape Bracket
- Vibration Isolators
- Harness w/Switch
- Deutsch Connector

# Q-SERIES<sup>®</sup> PRO

The Q-Series PRO is designed and built to withstand the harshest working environments imaginable. Constructed of the toughest and most durable materials available, including a double-pass TIG-welded stainless steel bracket with vibration isolator, the Q-Series PRO provides reliable, powerful LED light and is tough enough to withstand mining, agriculture, construction, and the oil and gas industries. The rugged construction also makes it well suited to extreme environments. If the application is severe, the Q-Series PRO is the ultimate lighting solution.

RIGID's Q-Series PRO lights are also available with a durable white finish. Though suitable for marine applications, RIGID's white lighting products are perfect for use anywhere an alternative to black is desired. The distinctive white is a durable UV-resistant powder coated finish with an additional chromate conversion coating for superior corrosion resistance. They feature the same legendary lighting technology and superior build quality as the rest of RIGID's lighting products, providing reliable and efficient lighting on demand.



**THE ULTIMATE  
LIGHTING  
SOLUTION**





## FEATURES



- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant – Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant – Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)

## DIMENSIONS & MOUNTS

ALL HOUSINGS AVAILABLE IN WHITE



### SURFACE MOUNT

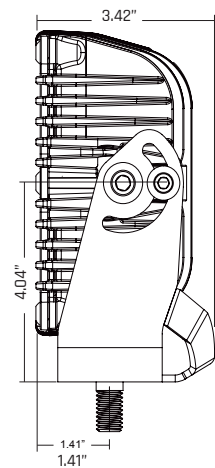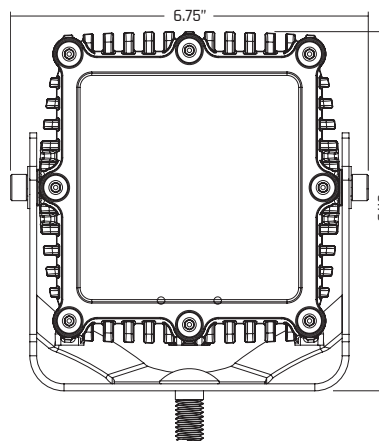

WHAT BEAM PATTERN WILL SUIT MY NEEDS THE BEST?




## BEAM PATTERNS


Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.

### FLOOD DIFFUSED

Flood optic behind diffused lens




### FLOOD




### DRIVING DIFFUSED


Driving optic behind diffused lens




### DRIVING





### FLOOD/DIFFUSED COMBO



### SPOT/DIFFUSED COMBO




### DRIVING/DIFFUSED COMBO



SIDE VIEW - COMBO WITH DIFFUSED

### DRIVING/HYSPOT COMBO

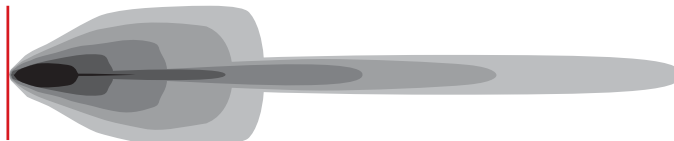

### SPOT



### HYSPOT



HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

## SPECIFICATIONS



|                                | MOUNT | BLACK SINGLE | WHITE SINGLE | WT. (LBS.) | WATTS | AMP DRAW @ 14VDC | LEDs | *NEW PRO RAW LUMENS | *ORIGINAL RAW LUMENS | A    | B   | C    | **PEAK BEAM INTENSITY(cd) |
|--------------------------------|-------|--------------|--------------|------------|-------|------------------|------|---------------------|----------------------|------|-----|------|---------------------------|
| <b>FLOOD DIFFUSED</b>          | SM    | 244513       | 245513       | 2.8        | 123   | 8.8              | 16   | 12672               | 7040                 | 77   | 88  | 176  | 7737                      |
| <b>DRIVING DIFFUSED</b>        | SM    | 544513       | 545513       | 2.8        | 195   | 13.9             | 24   | 19008               | 9000                 | 111  | 105 | 210  | 11098                     |
| <b>FLOOD</b>                   | SM    | 244113       | 245113       | 2.8        | 123   | 8.8              | 16   | 12672               | 7040                 | 329  | 181 | 362  | 32902                     |
| <b>DRIVING</b>                 | SM    | 544313       | 545313       | 2.8        | 195   | 13.9             | 24   | 19008               | 9000                 | 1035 | 321 | 643  | 103531                    |
| <b>FLOOD/DIFFUSED COMBO</b>    | SM    | 244713       | 245713       | 2.8        | 123   | 8.8              | 16   | 12672               | 7040                 | 196  | 140 | 280  | 19657                     |
| <b>SPOT/DIFFUSED COMBO</b>     | SM    | 244613       | 245613       | 2.8        | 123   | 8.8              | 16   | 12672               | 7040                 | 1694 | 411 | 823  | 169403                    |
| <b>DRIVING/DIFFUSED COMBO</b>  | SM    | 544613       | 545613       | 2.8        | 195   | 13.9             | 24   | 19008               | 9000                 | 445  | 211 | 422  | 44587                     |
| <b>DRIVING/HYPERSPOT COMBO</b> | SM    | 544813       | 545813       | 2.8        | 175   | 12.5             | 20   | 12150               | 7500                 | 2169 | 465 | 931  | 216975                    |
| <b>SPOT</b>                    | SM    | 244213       | 245213       | 2.8        | 123   | 8.8              | 16   | 12672               | 7040                 | 3446 | 587 | 1174 | 344627                    |
| <b>HYPERSPOT</b>               | SM    | 544713       | -            | 2.8        | 80    | 5.7              | 16   | -                   | 7040                 | 3280 | 573 | 1146 | 328000                    |

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.  
(SM) = Surface Mount



## LIGHTS COME WITH

- Mounting Hardware
- Stainless Steel, Heavy Duty U-Shape Bracket
- Vibration Isolators
- Harness w/Switch
- Deutsch Connector

# SR-Q<sup>®</sup> PRO

The SR-Q Series PRO is a sleek low profile lighting option that packs more lighting output than ever before thanks to recent improvements to the advanced LEDs inside. The SR-Q Series PRO now emits up to 4,752 raw lumens, depending on optic. An excellent choice for any application where space is limited, the SR-Q Series PRO makes auxiliary lighting professional grade. A single row of LEDs and is available in multiple beam patterns, including Spot, Flood, Driving, Hyperspot, and Diffused; as well as being offered in UV. Other recent updates to the SR-Q Series PRO include updated RIGID branding and blacked out circuit boards for a more refined look. Both surface and flush mount options are available and there are multiple mounting capabilities, such as the Suction Cup Mount and Angled Flush Mounts, just to name a few. The SR-Q Series PRO is also a perfect back-up light and is available as a Back-Up Light Kit with a 25' harness and a three-position switch for ease of wiring and usage.

RIGID's SR-Q Series PRO lights are also available with a durable white finish. Though suitable for marine applications, RIGID's white lighting products are perfect for use anywhere an alternative to black is desired. The distinctive white is a durable UV-resistant powder coated finish with an additional chromate conversion coating for superior corrosion resistance. They feature the same legendary lighting technology and superior build quality as the rest of RIGID's lighting products, providing reliable and efficient lighting on demand.



**PERFECT  
BACK-UP  
LIGHT**



## FEATURES



- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)

## DIMENSIONS & MOUNTS



ALL HOUSINGS AVAILABLE IN WHITE



### SURFACE MOUNT



### FLUSH MOUNT



WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?




## BEAM PATTERNS


Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.

### FLOOD DIFFUSED

Flood optic behind diffused lens




### FLOOD





### DRIVING DIFFUSED


Driving optic behind diffused lens




### DRIVING



### SPOT

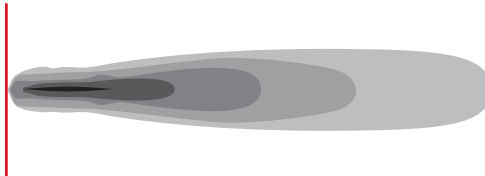

### HYPERSPOT

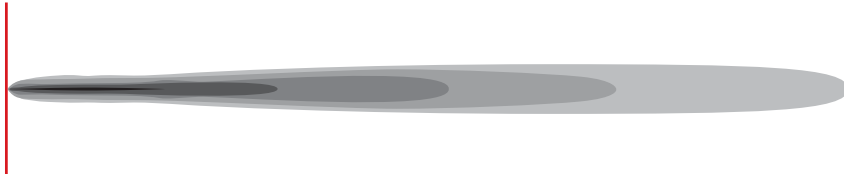

HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

**SPECIFICATIONS**



|                             | MOUNT | BLACK SINGLE | BLACK PAIR | WHITE SINGLE | WHITE PAIR | WT (LBS.) | WATTS | AMP DRAW @ 14VDC | LEDS | *NEW PRO RAW LUMENS               | *ORIGINAL RAW LUMENS | A   | B   | C   | **PEAK BEAM INTENSITY (cd) |
|-----------------------------|-------|--------------|------------|--------------|------------|-----------|-------|------------------|------|-----------------------------------|----------------------|-----|-----|-----|----------------------------|
| <b>FLOOD<br/>DIFFUSED</b>   | SM    | 904513       | 905513     | 944513       | 945513     | .75       | 32    | 2.29             | 4    | 3168                              | 1568                 | 13  | 36  | 73  | 1338                       |
|                             | FM    | 924513       | 925513     | 964513       | 965513     | .90       | 32    | 2.29             | 4    | 3168                              | 1568                 | 13  | 36  | 73  | 1338                       |
| <b>DRIVING<br/>DIFFUSED</b> | SM    | 914513       | 915513     | 954513       | 955513     | .75       | 41    | 2.93             | 6    | 4752                              | 3096                 | 32  | 57  | 114 | 3286                       |
|                             | FM    | 934513       | 935513     | 974513       | 975513     | .9        | 41    | 2.93             | 6    | 4752                              | 3096                 | 32  | 57  | 114 | 3286                       |
| <b>FLOOD</b>                | SM    | 904113       | 905113     | 944113       | 945113     | .75       | 32    | 2.29             | 4    | 3168                              | 1568                 | 69  | 83  | 166 | 6924                       |
|                             | FM    | 924113       | 925113     | 964113       | 965113     | .9        | 32    | 2.29             | 4    | 3168                              | 1568                 | 69  | 83  | 166 | 6924                       |
| <b>DRIVING</b>              | SM    | 914313       | 915313     | 954313       | 955313     | .75       | 41    | 2.93             | 6    | 4752                              | 3096                 | 275 | 166 | 332 | 27599                      |
|                             | FM    | 934313       | 935313     | 974313       | 975313     | .9        | 41    | 2.93             | 6    | 4752                              | 3096                 | 275 | 166 | 332 | 27599                      |
| <b>SPOT</b>                 | SM    | 904213       | 905213     | 944213       | 945213     | .75       | 32    | 2.29             | 4    | 3168                              | 1568                 | 642 | 253 | 507 | 64287                      |
|                             | FM    | 924213       | 925213     | 964213       | 965213     | .9        | 32    | 2.29             | 4    | 3168                              | 1568                 | 642 | 253 | 507 | 64287                      |
| <b>HYPERSPOT</b>            | SM    | 916713       | 916813     | -            | -          | .75       | 20    | 1.4              | 4    |                                   | 1760                 | 930 | 305 | 610 | 93000                      |
| <b>UV DRIVING</b>           | SM    | 916393       | 917393     | -            | -          | .75       | -     | -                | 6    | 4800 milliwatts at 395 nanometers |                      |     |     |     |                            |
| <b>UV DIFFUSED</b>          | SM    | 916593       | 917593     | -            | -          | .75       | -     | -                | 6    | 4800 milliwatts at 395 nanometers |                      |     |     |     |                            |

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.  
(SM) = Surface Mount, (FM) = Flush Mount



**LIGHTS COME WITH**

- Mounting Hardware
- Stainless Steel, U-Shape Bracket (Excludes FM)
- Solid Black Light Cover (Excludes FM)
- Harness w/Switch
- Deutsch Connector

# SR-M<sup>®</sup>PRO

Among the smallest, most compact products that RIGID offers, the SR-M Series PRO (Single Row Mini) still packs a lot of lighting power with an impressive output up to 2,376 raw lumens thanks to improved LED technology. The size of SR-M Series PRO makes it highly adaptable to a variety of uses, including everything from a flood light on a toy hauler, handlebar-mounted lights for motorcycles and many other power sports applications. Common automotive uses include back bumper lighting. With a range of beam patterns in your choice of optics, the SR-M Series PRO is one of the brightest mini LED lights on the market. In addition to more powerful LEDs, recent updates include new branding and blacked-out circuit boards make the SR-M Series PRO more powerful and refined than ever before. They feature the same superior build quality as the rest of RIGID's lighting products, providing reliable and efficient lighting on demand.

RIGID's SR-M Series PRO lights are also available with a durable white finish. Though suitable for marine applications, RIGID's white lighting products are perfect for use anywhere an alternative to black is desired. The distinctive white is a durable UV-resistant powder coated finish with an additional chromate conversion coating for superior corrosion resistance. They feature the same legendary lighting technology and superior build quality as the rest of RIGID's lighting products, providing reliable and efficient lighting on demand.



**HIGHLY  
ADAPTABLE  
TO A VARIETY  
OF USES**





## FEATURES



- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)

## DIMENSIONS & MOUNTS



ALL HOUSINGS AVAILABLE IN WHITE



### SURFACE MOUNT



### FLUSH MOUNT




WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?




## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.


**FLOOD DIFFUSED**  
Flood optic behind diffused lens




**FLOOD**




**DRIVING DIFFUSED**  
Driving optic behind diffused lens



**DRIVING**



**SPOT**

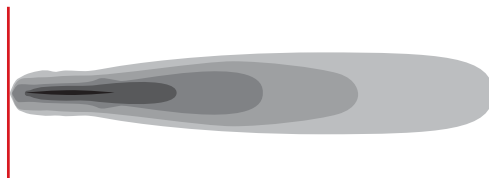

HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

**SPECIFICATIONS**



|                             | MOUNT | BLACK SINGLE | BLACK PAIR | WHITE SINGLE | WHITE PAIR | WT (LBS.) | WATTS | AMP DRAW @ 14VDC | LEDS | *NEW PRO RAW LUMENS               | *ORIGINAL RAW LUMENS | A   | B   | C   | **PEAK BEAM INTENSITY (cd) |
|-----------------------------|-------|--------------|------------|--------------|------------|-----------|-------|------------------|------|-----------------------------------|----------------------|-----|-----|-----|----------------------------|
| <b>FLOOD<br/>DIFFUSED</b>   | SM    | 902513       | -          | 942513       | -          | 0.476     | 15    | 1.14             | 2    | 1584                              | 880                  | 18  | 43  | 86  | 1830                       |
|                             | FM    | 922513       | -          | 962513       | -          | 0.588     | 15    | 1.14             | 2    | 1584                              | 880                  | 18  | 43  | 86  | 1830                       |
| <b>DRIVING<br/>DIFFUSED</b> | SM    | 912513       | -          | 952513       | -          | 0.476     | 23    | 1.64             | 3    | 2376                              | 1125                 | 30  | 55  | 110 | 3029                       |
|                             | FM    | 932513       | -          | 972513       | -          | 0.588     | 23    | 1.64             | 3    | 2376                              | 1125                 | 30  | 55  | 110 | 3029                       |
| <b>FLOOD</b>                | SM    | 902113       | -          | 942113       | -          | 0.476     | 15    | 1.07             | 2    | 1584                              | 880                  | 32  | 56  | 112 | 3160                       |
|                             | FM    | 922113       | -          | 962113       | -          | 0.588     | 15    | 1.07             | 2    | 1584                              | 880                  | 32  | 56  | 112 | 3160                       |
| <b>DRIVING</b>              | SM    | 912313       | -          | 952313       | -          | 0.476     | 23    | 1.64             | 3    | 2376                              | 1125                 | 107 | 104 | 207 | 10738                      |
|                             | FM    | 932313       | -          | 972313       | -          | 0.588     | 23    | 1.64             | 3    | 2376                              | 1125                 | 107 | 104 | 207 | 10738                      |
| <b>SPOT</b>                 | SM    | 902213       | -          | 942213       | -          | 0.476     | 15    | 1.07             | 2    | 1584                              | 880                  | 346 | 186 | 372 | 34641                      |
|                             | FM    | 922213       | -          | 962213       | -          | 0.588     | 15    | 1.07             | 2    | 1584                              | 880                  | 346 | 186 | 372 | 34641                      |
| <b>UV DRIVING</b>           | SM    | 91339        | -          | -            | -          | .38       | -     | -                | 3    | 2400 milliwatts at 395 nanometers |                      |     |     |     |                            |
| <b>UV DIFFUSED</b>          | SM    | 91359        | -          | -            | -          | .38       | -     | -                | 3    | 2400 milliwatts at 395 nanometers |                      |     |     |     |                            |

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.  
(SM) = Surface Mount, (FM) = Flush Mount



**LIGHTS COME WITH**

- Mounting Hardware
- Stainless Steel, U-Shape Bracket (Excludes FM)
- Solid Black Light Cover (Excludes FM)
- Harness w/Switch
- Deutsch Connector

# A-SERIES<sup>®</sup>


The A-Series LED Accessory Light is the universal light that can be used just about anywhere. Vehicle cabs, boat cabins, work vehicle beds, under the hood of a vehicle and trunks are just a few of the places where the A-Series can provide handy bright lighting in otherwise dark environments. The A-Series has a durable compact aluminum housing and includes rubber flat-mount, 3M™ VHB™, 2 way pad for flat mounting, and radius tube-mount adapters, which provide side or bottom wire exits to accommodate different applications. It is lightweight, waterproof, and available in a variety of different LED colors in high and low power versions. The versatility of the A-Series makes it an easy installation on almost anything.

## COLOR SELECTION




COOL WHITE

• Cool White matches the Kelvin of all other white LED lights.



WARM WHITE

• Warm White is comparable to a 60-watt incandescent light bulb



NATURAL WHITE

• Natural White is similar to being outside on a sunny day.



RED



BLUE



AMBER



GREEN



**MINIMUM  
SPACE.  
MAXIMUM  
POWER.**

Triplex™ coating is three to five times stronger than MIL-A-8625, the military set specification for anodic coatings. Salt chamber testing exceeded 9,000 hours with zero pitting or corrosion.



TRIPLEX™



## FEATURES

- 50,000+ Hour Lifespan
- 10-28 VDC
- Durable UV Polyester Powder Coat
- 2-Wire Open Lead for Convenient Wiring
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP69k Compliant - Dust / Water Ingress
- Mount Adapters Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Epoxy Sealed, No Vent
- 24" Molded Wire Ingress



## LIGHTS COME WITH

- Mounting Hardware
- 2 Mounting Hole Rubber Plugs
- 1 Adhesive Primer
- 1 VHB Mount Tape
- 1 Flat Mount Adapter
- 1 Tube Mount Adapter
- 3ft. Wire Extension
- 2-Wire Open Lead, No Connector

### FLAT MOUNT



BOTTOM WIRE EXIT




SIDE WIRE EXIT



SIDE OR BOTTOM WIRE EXIT

## DIMENSIONS & MOUNTS



\*Dimensions shown without adapter

## SPECIFICATIONS

|            | LIGHT COLOR   | BLACK          |               | WHITE          |              | TRIPLEX™       |              |
|------------|---------------|----------------|---------------|----------------|--------------|----------------|--------------|
|            |               | SINGLE PART NO | PAIR PART NO. | SINGLE PART NO | PAIR PART NO | SINGLE PART NO | PAIR PART NO |
| LOW POWER  | WARM WHITE    | 480013         | 482013        | 480133         | 482133       | -              | -            |
|            | NATURAL WHITE | 480023         | 482023        | 480143         | 482143       | -              | -            |
|            | COOL WHITE    | 480033         | 482033        | 480153         | 482153       | -              | -            |
|            | RED           | 480043         | 482043        | 480163         | 482163       | -              | -            |
|            | BLUE          | 480053         | 482053        | 480173         | 482173       | -              | -            |
|            | GREEN         | 480063         | 482063        | 480183         | 482183       | -              | -            |
|            | AMBER         | 480343         | 482343        | 480323         | 482323       | -              | -            |
| HIGH POWER | WARM WHITE    | 480073         | 482073        | 480193         | 482193       | 480253         | 482253       |
|            | NATURAL WHITE | 480083         | 482083        | 480203         | 482203       | 480263         | 482263       |
|            | COOL WHITE    | 480093         | 482093        | 480213         | 482213       | 480273         | 482273       |
|            | RED           | 480103         | 482103        | 480223         | 482223       | 480283         | 482283       |
|            | BLUE          | 480113         | 482113        | 480233         | 482233       | 480293         | 482293       |
|            | GREEN         | 480123         | 482123        | 480243         | 482243       | 480303         | 482303       |
|            | AMBER         | 480333         | 482333        | 480313         | 482313       | 480353         | 482353       |

# R-SERIES 46™

RIGID entered the world of round lighting with the release of the R-Series 46, which combines innovative LED technology with the classic round shape of traditional auxiliary lighting. The R-Series 46 mirrors the size of the common Par 46 in size, making it easy to both utilize modern LED technology in common older applications, and also retrofit. RIGID leading technology into existing fixtures, such as police spotlights, tractor headlights, and other heavy machinery. The R-Series 46 provides a powerful beam of light and a 50,000 hour lifespan that is far superior to traditional incandescent bulbs, all while using a fraction of the power. The R-Series 46 is available with stand-alone surface mounting and as a direct-fit replacement for Par 46 bulbs.

RIGID's R-Series 46 lights are also available with a durable white finish. Though suitable for marine applications, RIGID's white lighting products are perfect for use anywhere an alternative to black is desired. The distinctive white is a durable UV-resistant powder coated finish with an additional chromate conversion coating for superior corrosion resistance. They feature the same legendary lighting technology and superior build quality as the rest of RIGID's lighting products, providing reliable and efficient lighting on demand.

**THE WORLD  
OF ROUND JUST  
GOT RIGID**





## FEATURES



- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)

## DIMENSIONS & MOUNTS



ALL HOUSINGS AVAILABLE IN WHITE



### SURFACE MOUNT



### RETROFIT




WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?



## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.

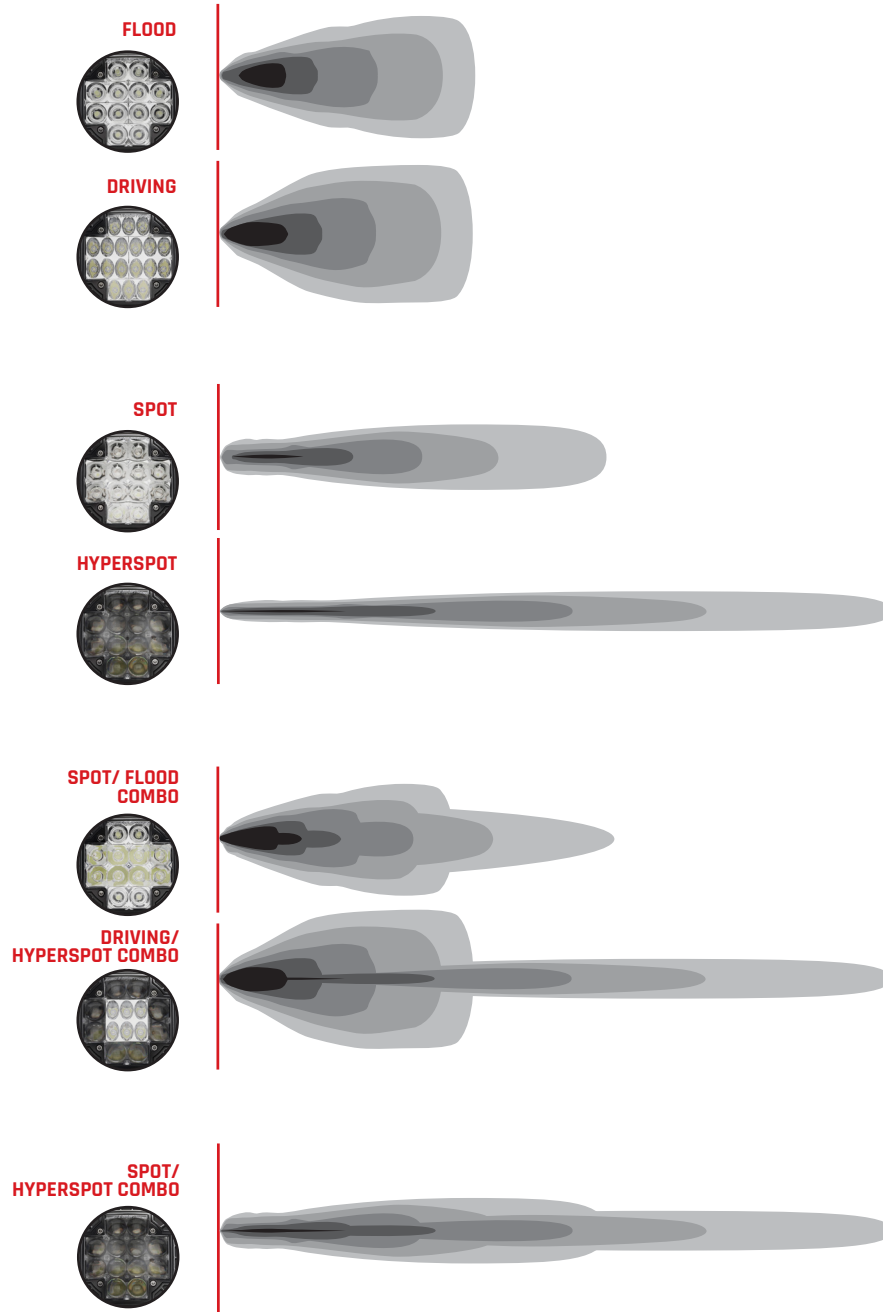



HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

## SPECIFICATIONS



|                                | MOUNT | BLACK SINGLE | BLACK PAIR | WHITE SINGLE | WHITE PAIR | WT (LBS.) | WATTS | AMP DRAW @ 14VDV | LEDS | *RAW LUMENS | A    | B   | C    | **PEAK BEAM INTENSITY (cd) |
|--------------------------------|-------|--------------|------------|--------------|------------|-----------|-------|------------------|------|-------------|------|-----|------|----------------------------|
| <b>FLOOD</b>                   | SM    | 63311        | 83311      | 63411        | 83411      | 2.40      | 44.5  | 3.18             | 12   | 3645        | 166  | 129 | 258  | 16587                      |
| <b>DRIVING</b>                 | SM    | 63351        | 83351      | 63451        | 83451      | 2.40      | 52.8  | 4.27             | 18   | 6615        | 372  | 193 | 386  | 37203                      |
| <b>SPOT</b>                    | SM    | 63321        | 83321      | 63421        | 83421      | 2.40      | 44.5  | 3.18             | 12   | 3645        | 2027 | 450 | 900  | 202687                     |
| <b>HYPERSPOT</b>               | SM    | 63341        | 83341      | 63441        | 83441      | 2.40      | 44.5  | 3.18             | 12   | 3645        | 2549 | 505 | 1010 | 254913                     |
| <b>SPOT/FLOOD COMBO</b>        | SM    | 63331        | 83331      | 63431        | 83431      | 2.40      | 44.5  | 3.18             | 12   | 3645        | 1346 | 367 | 734  | 134593                     |
| <b>DRIVING/HYPERSPOT COMBO</b> | SM    | 63361        | 83361      | 63461        | 83461      | 2.40      | 49.8  | 3.56             | 14   | 4252        | 1847 | 430 | 860  | 184742                     |

## RETROFIT SKUS

|                                |          |       |   |   |   |      |      |      |    |      |      |     |      |        |
|--------------------------------|----------|-------|---|---|---|------|------|------|----|------|------|-----|------|--------|
| <b>SPOT</b>                    | Retrofit | 63322 | - | - | - | 2.00 | 44.5 | 3.18 | 12 | 3645 | 2027 | 450 | 900  | 202687 |
| <b>HYPERSPOT</b>               | Retrofit | 63342 | - | - | - | 2.00 | 44.5 | 3.18 | 12 | 3645 | 2549 | 505 | 1010 | 254913 |
| <b>DRIVING/HYPERSPOT COMBO</b> | Retrofit | 63362 | - | - | - | 2.00 | 49.8 | 3.56 | 14 | 4252 | 1847 | 430 | 860  | 184742 |
| <b>SPOT/HYPERSPOT COMBO</b>    | Retrofit | 63372 | - | - | - | 2.00 | 55.8 | 3.99 | 14 | 4252 | 1994 | 447 | 893  | 199367 |

\* Raw Lumens is based on LED manufacturer specifications; \*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.  
(SM) = Surface Mount



## LIGHTS COME WITH

### BLACK HOUSING SURFACE MOUNT ONLY

- Mounting Hardware
- Stainless Steel, U-Shape Bracket
- Harness w/Switch
- Deutsch Connector
- Solid Black Light Cover

### WHITE HOUSING ONLY

- Mounting Hardware
- Stainless Steel, U-Shape Bracket
- Open Leads, No Connector
- Harness Sold Separately
  - PN 40193 (Single)
  - PN 40196 (Pair)

### RETROFIT BLACK HOUSING ONLY

- Built-in Power & Ground Threaded Insert

# R-SERIES® 36

RIGID has expanded its round light offering with the new R-Series 36. Designed to be a direct fit into any Par 36 bulb enclosure, this new light is a drop-in replacement for thousands of fixtures used on tractors, heavy equipment, and other industrial and agricultural applications. The Par 36 is also used on many spotlight fixtures. Inside, the R-36 Retrofit is available with RIGID's optics in a variety of beam patterns. The lightweight housing includes an advance heat sink for superior cooling, while the outside includes a durable UV-resistant polyester powder coat finish and an unbreakable polycarbonate lens. With its tested resistance to vibration, salt, and water, the Par 36 Retrofit provides years of trouble free use.



**DROP-IN  
REPLACEMENT**





## FEATURES

- Up to 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Built-in Power & Ground Threaded Insert
- Through-Hole Heatsink for Optimal Cooling
- Retrofits Standard PAR36 Bulb Enclosure
- Clear Light Cover Included (Light Shown with Cover On)

## DIMENSIONS & MOUNTS



### PAR36 RETROFIT



WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?




## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.


### FLOOD DIFFUSED

Flood optic behind diffused lens




### DRIVING DIFFUSED


Driving optic behind diffused lens



### FLOOD



### DRIVING



### SPOT



### HYPERSPOT



**HOW MUCH  
OUTPUT DO  
I NEED?**

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

**SPECIFICATIONS**



|                             | MOUNT    | BLACK SINGLE | WT. (LBS.) | WATTS | AMP DRAW @ 14VDC | LEDs | *RAW LUMENS | A   | B   | C   | **PEAK BEAM INTENSITY(cd) |
|-----------------------------|----------|--------------|------------|-------|------------------|------|-------------|-----|-----|-----|---------------------------|
| <b>FLOOD<br/>DIFFUSED</b>   | Retrofit | 62120        | 1          | 24    | 1.77             | 4    | 1411        | 8   | 28  | 57  | 808                       |
| <b>DRIVING<br/>DIFFUSED</b> | Retrofit | 62150        | 1          | 32    | 2.45             | 6    | 2910        | 19  | 43  | 86  | 1867                      |
| <b>FLOOD</b>                | Retrofit | 62130        | 1          | 24    | 1.77             | 4    | 1411        | 33  | 58  | 115 | 3329                      |
| <b>DRIVING</b>              | Retrofit | 62140        | 1          | 32    | 2.45             | 6    | 2910        | 146 | 121 | 241 | 14559                     |
| <b>SPOT</b>                 | Retrofit | 62110        | 1          | 24    | 1.77             | 4    | 1411        | 575 | 240 | 480 | 57542                     |
| <b>HYPERSPOT</b>            | Retrofit | 62160        | 1          | 23    | 1.77             | 4    | 1411        | 792 | 281 | 563 | 79178                     |

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.



**LIGHTS COME WITH**

- Clear Light Cover
- Built-in Power & Ground Threaded Insert


# SCENE LIGHTS

Developed specifically for First Responders and Rescue personnel, LED Scene Lighting by RIGID is an efficient way to light up any area. Available in a variety of sizes and configurations to accommodate different needs and uses, Scene Lighting utilizes the latest in LED technology in a rugged housing that incorporates a thermally optimized heat sink for prolonged, trouble-free use. Scene Lights provide up to 115° horizontal spread for maximum coverage and heavy-duty mounting brackets that enable precise adjustable aiming. Whether it's the scene of a fire or a remote pit in Baja, Scene Lighting provides clear, bright light with minimal amp draw.

RIGID's Scene lights are also available with a durable white finish. Though suitable for marine applications, RIGID's white lighting products are perfect for use anywhere an alternative to black is desired. The distinctive white is a durable UV-resistant powder coated finish with an additional chromate conversion coating for superior corrosion resistance. They feature the same legendary lighting technology and superior build quality as the rest of RIGID's lighting products, providing reliable and efficient lighting on demand.

**115°  
HORIZONTAL  
SPREAD  
(2 x 10)**



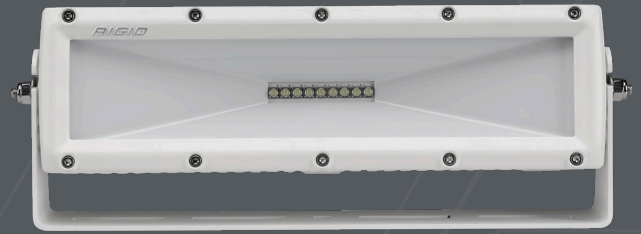

## ★ FEATURES



- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Open Leads for Convenient Wiring
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Heavy Duty Brackets Included (Excludes 1 x 2)
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI (Excludes 1 x 2)
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Up to 115° Beam Pattern
- White Polycarbonate Reflector with 98% Reflectivity

## DIMENSIONS & MOUNTS



ALL HOUSINGS AVAILABLE IN WHITE





4 x 4



2 x 10




2 x 2



Also available in  
Flush Mount

1 x 2





WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?



## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.

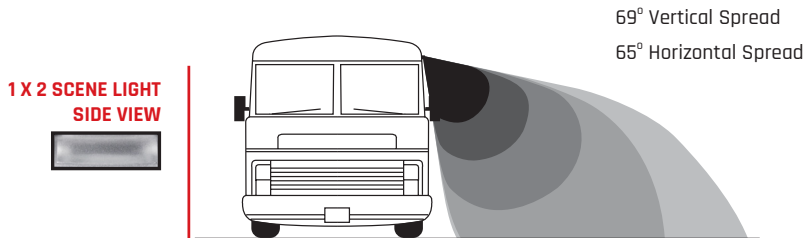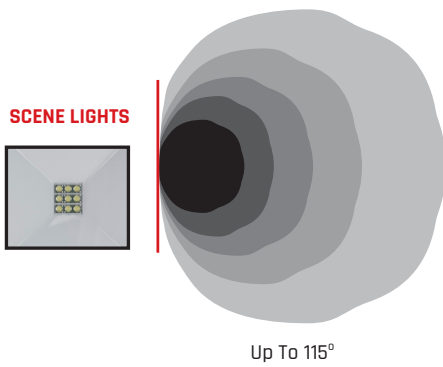

## AC ALSO AVAILABLE

ALL HOUSINGS AVAILABLE IN WHITE





**HOW MUCH  
OUTPUT DO  
I NEED?**

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

**SPECIFICATIONS**



AC VOLTAGE =114-126 VAC

|                                  | BEAM DEGREE | MOUNT | BLACK PART NO | WHITE PART NO. | AC/DC | WT. (LBS.) | WATTS | AMP DRAW    | LEDs | *RAW LUMENS | A   | B    | C    | **PEAK BEAM INTENSITY(cd) |
|----------------------------------|-------------|-------|---------------|----------------|-------|------------|-------|-------------|------|-------------|-----|------|------|---------------------------|
| <b>1 X 2 SCENE LIGHT</b>         | 65°         | SM    | 86610         | 86620          | DC    | .53        | 9     | .75 @14VDC  | 3    | 1100        | 7   | 26.4 | 52.7 | 695                       |
| <b>AMBER - 1 X 2 SCENE LIGHT</b> | 65°         | SM    | 86630         | 86640          | DC    | .53        | 9     | .75 @14VDC  | 3    | 1100        | N/A | N/A  | N/A  | N/A                       |
| <b>2 X 2 SCENE LIGHT</b>         | 115°        | HD    | 681513        | 681613         | DC    | 2          | 37    | 2.78 @14VDC | 4    | 4000        | 12  | 35   | 70   | 2143                      |
|                                  | 115°        | FM    | 681523        | 681623         | DC    | 1.17       | 37    | 2.78 @14VDC | 4    | 4000        | 12  | 35   | 70   | 2143                      |
|                                  | 115°        | HD    | 683713        | 683613         | AC    | 2.1        | 17    | .19 @120V   | 16   | 1541        | 8   | 28   | 57   | 797                       |
| <b>2 X 10 SCENE LIGHT</b>        | 115°        | SM    | 68131         | 68141          | DC    | 5.36       | 76    | 6 @14VDC    | 9    | 8190        | 22  | 47   | 94   | 2184                      |
|                                  | 115°        | SM    | 68351         | 68341          | AC    | 5.5        | 76    | .79 @120V   | 80   | 6293        | 27  | 52   | 104  | 2702                      |
| <b>4 X 4 SCENE LIGHT</b>         | 115°        | SM    | 681113        | 681213         | DC    | 2.8        | 83    | 5.8 @14VDC  | 9    | 8190        | 22  | 46   | 93   | 2150                      |
|                                  | 115°        | SM    | 683313        | 683113         | AC    | 2.8        | 58    | .55 @ 120V  | 64   | 6563        | 24  | 49   | 98   | 2419                      |

\* Raw Lumens is based on LED manufacturer specifications. \*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.  
(SM) = Surface Mount, (FM) = Flush Mount



**LIGHTS COME WITH**

**4 x 4 / 2 x 2 / 2 x 10 HOUSING ONLY**

- Mounting Hardware
- Heavy Duty U-Shape Brackets
- Vibration Isolators

**1 x 2 HOUSING ONLY**

- Mounting Hardware

**DC VERSION ONLY**

- 2-Wire Open Lead, No Connector

**AC VERSION ONLY**

- Standard 110V Outlet Plug

# SITE SERIES™

Many situations require a highly portable, high-powered light source that can illuminate a required worksite. Whether it's an emergency scene, a mine or industrial application, a remote pit in Baja, or a harbor slip, whatever the situation, RIGID's Site Series provides the flexibility to light any area and provides the mobility to easily move the lighting source with changing conditions. Featuring RIGID's all new 80/40 Optic, Flood and an 80/40, Spot Combo, the Site Series offers a wider area of coverage than comparable lights from the competition. The Site Series' handle and tilting brackets make adjustments and moving the light easy for the user. Additional mounting options are sold separately. Available in both AC and DC options with a 50,000 hour lifespan and unmatched RIGID quality, the RIGID Site Series provides reliable lighting for many different worksite environments.

RIGID's Site Series lights are also available with a durable white finish. Though suitable for marine applications, RIGID's white lighting products are perfect for use anywhere an alternative to black is desired. The distinctive white is a durable UV-resistant powder coated finish with an additional chromate conversion coating for superior corrosion resistance. They feature the same legendary lighting technology and superior build quality as the rest of RIGID's lighting products, providing reliable and efficient lighting on demand.



**20° SIDE  
ANGLE DESIGN  
TO INCREASE  
BEAM WIDTH**



## FEATURES



- 50,000+ Hour Lifespan
- 10-16 VDC, 16-48 VDC, 100-277 VAC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)
- Available in DC & AC Versions
- DC available in Low or High Voltage
- 48 High Quality LEDs
- 20° Side Angle Design for Increased Beam Width
- Various Optic Configuration Options
- Aluminum Clad Printed Circuit Board
- High Quality Aluminum Handle Included to Assist with Aiming or Transporting the Site Light
- Heavy Duty Mounting Bracket with Adjustable Mounting Angles
- Additional Mounting Accessories Available

## DIMENSIONS & MOUNTS

ALL HOUSINGS AVAILABLE IN WHITE



### SURFACE MOUNT

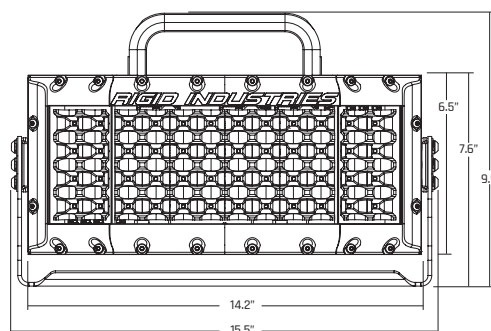

### POLE MOUNT ALSO AVAILABLE

Sold Separately - SEE GRILLES & OE MOUNTS

40095 PART NO.






WHAT BEAM  
PATTERN WILL  
SUIT MY NEEDS  
THE BEST?



## BEAM PATTERNS

Our custom designed graphs are intended to illustrate the beam patterns that our optics produce. First, consider what type of application the light is needed for and then choose what beam pattern best suits your needs. Each beam pattern varies depending on the optic or optic combination you choose. Once you know which beam pattern best suits your needs, refer to the specifications table (A, B, C) to determine how much LUX output you need and which product will best suit your application.

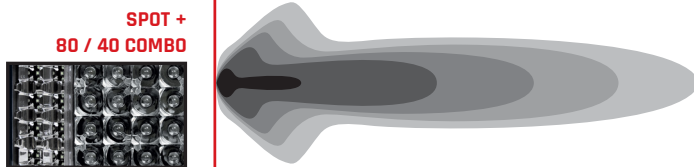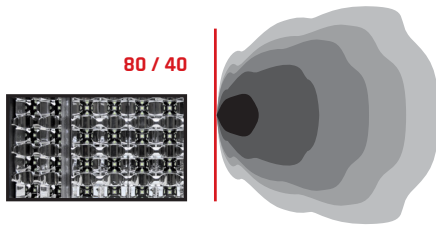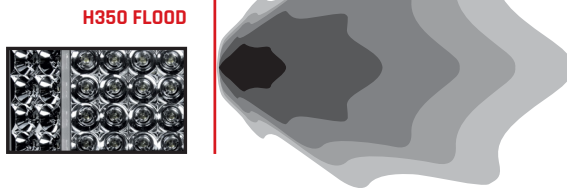

HOW MUCH  
OUTPUT DO  
I NEED?

A = LUX AT 10 METERS  
B = BEAM DISTANCE (m) WITH 1 LUX  
C = BEAM DISTANCE (m) WITH .25 LUX

## SPECIFICATIONS



| MOUNT                     | BLACK PART NO. | WHITE PART NO. | VOLTAGE | AC/DC      | WT (LBS.) | WATTS | DC-AMP DRAW @14VDC | AC-AMP DRAW @120VAC | LEDS | *RAW LUMENS |       |      |     | **PEAK BEAM INTENSITY (cd) |        |
|---------------------------|----------------|----------------|---------|------------|-----------|-------|--------------------|---------------------|------|-------------|-------|------|-----|----------------------------|--------|
|                           |                |                |         |            |           |       |                    |                     |      |             | A     | B    | C   |                            |        |
| <b>H350 FLOOD</b>         | SM             | 73111          | 74111   | 10-16VDC   | DC        | 13.2  | 283                | 21.7                | -    | 48          | 16800 | 372  | 203 | 407                        | 39574  |
|                           | SM             | 73311          | 74311   | 16-48VDC   | DC        | 13.2  | 310                | 22.14               | -    | 48          | 19200 | 471  | 217 | 434                        | 47129  |
|                           | SM             | 73511          | 74511   | 100-277VAC | AC        | 17.4  | 290                | -                   | 2.43 | 48          | 19200 | 471  | 217 | 434                        | 47129  |
| <b>80/40</b>              | SM             | 73141          | 74141   | 10-16VDC   | DC        | 13.2  | 283                | 21.7                | -    | 48          | 16800 | 193  | 139 | 277                        | 18097  |
|                           | SM             | 73341          | 74341   | 16-48VDC   | DC        | 13.2  | 310                | 22.14               | -    | 48          | 19200 | 212  | 146 | 291                        | 21215  |
|                           | SM             | 73541          | 74541   | 100-277VAC | AC        | 17.4  | 290                | -                   | 2.43 | 48          | 19200 | 212  | 146 | 291                        | 21215  |
| <b>SPOT + 80/40 COMBO</b> | SM             | 73131          | 74131   | 10-16VDC   | DC        | 13.2  | 283                | 21.7                | -    | 48          | 16800 | 3511 | 592 | 1185                       | 337506 |
|                           | SM             | 73331          | 74331   | 16-48VDC   | DC        | 13.2  | 310                | 22.14               | -    | 48          | 19200 | 3734 | 611 | 1222                       | 373412 |
|                           | SM             | 73531          | 74531   | 16-48VDC   | DC        | 13.2  | 310                | 22.14               | -    | 48          | 19200 | 3734 | 611 | 1222                       | 373412 |

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.  
(SM) = Surface Mount



## LIGHTS COME WITH

- Mounting Hardware
- Stainless Steel, Heavy Duty Adjustable U-Shape Bracket
- Vibration Isolators

### AC VERSION ONLY

- Power Supply with Standard 110V Outlet Plug
- Deutsch Connector (Both Light & Power Supply)

### DC VERSION ONLY

- 2-Wire Open Leads, No Connector



# RI-SERIES™

The RIGID RI-Series is a full line of flashlights that offer high-output LED technology in a compact package. Inspired by tactical flashlights developed for military and law enforcement, the RI-Series couples cutting edge LEDs with machined aluminum reflectors to create a rugged, powerful light source. With a military-grade hard anodized aluminum housing, waterproof construction, rechargeable battery, and many more features, the RI-Series can withstand the elements and provide years of trouble-free operation.



## LIGHTS COME WITH

- Anti-Roll
- Pocket Clip (Excludes RI-600)
- Lanyard
- AC/DC Car Charger
- 110 Volt Wall Charger
- Rechargeable Lithium Ion Battery(s)
  - (1) RI-600 & RI-800
  - (2) RI-1100 & RI-1500

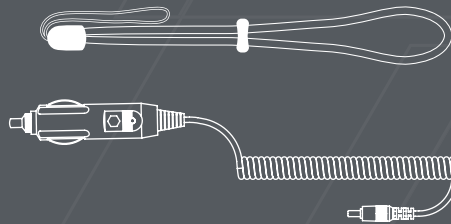

**THE POWER  
OF RIGID IN  
YOUR  
HANDS**



## FEATURES

- 50,000+ Hour Lifespan
- Impact Resistant Polycarbonate Lens
- IP67 Compliant - Dust / Water Ingress
- Operating Temp -40° F - +145° F / -40° C - +60° C
- High, Medium, Low, And Strobe Modes
- High Intensity Spot Reflector Design
- Thermally Regulated LED Circuit
- Momentary Tail-Cap Switch
- Type 3 Military Grade Hard Anodized Aluminum
- Polished Aluminum Reflector
- RI-600 is Available in Red, Blue, Green, Infrared and UV LEDs
- Tactical Bezel Housing (Excludes RI-600)
- Textured Pattern On Handle For Grip
- Works with 18650 Li-Ion or CR123 Batteries
- Limited Lifetime Warranty
- Holsters Also Available (Sold Separately)



## DIMENSIONS



**RI-600**



**RI-800**



**RI-1100**



**RI-1500**

| PART # | LIGHT COLOR OPTION |
|--------|--------------------|
| 30130  | Cool White         |
| 30132  | Red                |
| 30133  | Green              |
| 30134  | Blue               |
| 30135  | Semi-UV            |
| 30136  | Infrared           |

## SPECIFICATIONS



| PART NO.           | MODE | *RAW LUMENS | EFFECTIVE LUMENS | BATTERY RUN TIME | LUX @ 10mV | BEAM DISTANCE (m) w/1 LUX | **PEAK BEAM INTENSITY (cd) |
|--------------------|------|-------------|------------------|------------------|------------|---------------------------|----------------------------|
| 30130 (Cool White) | HIGH | 680         | 620              | 1.8 hrs          | 69         | 165                       | 6945                       |
|                    | MED  | 250         | 210              | 6.5 hrs          | 27         | 104                       | 2710                       |
|                    | LOW  | 80          | 60               | 24 hrs           | 7          | 51                        | 669                        |
| 30140 (Cool White) | HIGH | 820         | 768              | 1.6 hrs          | 231        | 304                       | 23174                      |
|                    | MED  | 300         | 273              | 5.5 hrs          | 95         | 195                       | 9560                       |
|                    | LOW  | 100         | 81               | 18 hrs           | 27         | 105                       | 2740                       |
| 30150 (Cool White) | HIGH | 1100        | 960              | 2.1 hrs          | 253        | 318                       | 25340                      |
|                    | MED  | 300         | 273              | 9 hrs            | 95         | 195                       | 9560                       |
|                    | LOW  | 100         | 81               | 26 hrs           | 27         | 105                       | 2740                       |
| 30160 (Cool White) | HIGH | 1500        | 1340             | 1.2 hrs          | 602        | 490                       | 60202                      |
|                    | MED  | 475         | 412              | 3.7 hrs          | 224        | 299                       | 22476                      |
|                    | LOW  | 150         | 104              | 16.5 hrs         | 51         | 146                       | 5167                       |

\* Raw Lumens is based on LED manufacturer specifications.\*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.

# Truck-Lite<sup>®</sup> **LED HEADLIGHT KIT** *BY RIGID INDUSTRIES<sup>®</sup>*

Truck-Lite<sup>®</sup> Headlight Kits by RIGID are an excellent upgrade for light, medium and heavy-duty trucks, off-road vehicles, classic cars, motorcycles and more. Perfectly adapted to cold environments, the 7" Round Heated Lens provides a steady, complete-surface melting of snow and ice that is only active when temperatures drop under 50°F/10°C. Metalized reflector optics provide lighting that is smooth and clean across the entire driving surface. LED headlights provide a brighter, crisper and whiter light output as compared to traditional incandescent, halogen, or HID headlights, with a color temperature closer to daylight. The advantages of LED lighting technology result in dramatically improving light projection distance and overall visibility. The durability and dependability of LED lighting provides a solid-state, bulb-free headlamp design that is impervious to damage from shock and vibration.



**THE PERFECT  
COMBINATION FOR  
TRAVELING FAR  
AND WIDE.**





## FEATURES

- DOT Compliant
- 16-Gauge Wire
- Encapsulated Circuitry
- 2 LED Arrays
- Low & High Beams
- Hard-Coated Polycarbonate Lens
- E-Coat Aluminum Housing
- Metalized Reflectors

## SPECIFICATIONS



Heated Lens  
Turns On At 10°C/50°F

|  | SINGLE PART NO | PAIR PART NO | WT (LBS.) | WATTS   | LEDs | AMP DRAW HEATED OFF @ 12.8VDC | AMP DRAW HEATED ON @ 12.8VDC |
|--|----------------|--------------|-----------|---------|------|-------------------------------|------------------------------|
| <b>7" Round w/ PWM Adaptors</b>                    | -              | 55000        | 2         | 46 / 23 | 2    | 3.0 / 5.6                     | 7.6 / 10.6                   |
| <b>7" Round w/ H13 to H4 Adaptors</b>              | -              | 55001        | 2         | 46 / 23 | 2    | 3.0 / 5.6                     | 7.6 / 10.6                   |
| <b>7" Round Single</b>                             | 55002          | -            | 2         | 46 / 23 | 2    | 3.0 / 5.6                     | 7.6 / 10.6                   |
| <b>5" x 7" No Adaptor</b>                          | -              | 55003        | 2         | 46 / 23 | 2    | 3.0 / 5.6                     | 7.6 / 10.6                   |
| <b>7" Round Heated Lens w/PWM Adaptor</b>          | -              | 55004        | 2         | 46 / 23 | 2    | 3.0 / 5.6                     | 7.6 / 10.6                   |
| <b>7" Round Heated Lens w/ H13 to H4 Adaptor</b>   | -              | 55005        | 2         | 46 / 23 | 2    | 3.0 / 5.6                     | 7.6 / 10.6                   |
| <b>LED HL PWM Anti-Flicker Adaptor - H13 to H4</b> | 55006          | -            | 2         | 46 / 23 | 2    | 3.0 / 5.6                     | 7.6 / 10.6                   |
| <b>7" Round Heated Lens Non JK No Adaptor</b>      | -              | 55008        | 2         | 46 / 23 | 2    | 3.0 / 5.6                     | 7.6 / 10.6                   |
| <b>7" Round Lens Non JK No Adaptor</b>             | -              | 55009        | 2         | 46 / 23 | 2    | 3.0 / 5.6                     | 7.6 / 10.6                   |

# SAE COMPLIANT

Off-road auxiliary lighting is one thing, but everyone knows that it's important to have lighting that is also safe and legal for on-road use. RIGID' SAE Compliant Fog Lights and Auxiliary High Beam Driving Lights allow them to be used on-the-road and not just off-road. RIGID created the proprietary output spread and height with the new patented Clarilux™ optic system. The color temperature of these LEDs was carefully chosen to be a perfect range of pure daylight to penetrate the night for superior clarity on the road. These SAE Compliant lights project long-range high intensity light while drawing very little power and provide up to 50,000 useful hours. The low profile design includes a High-Grade Aluminum Alloy Housing with a custom designed oversized heat sink to keep the LEDs running cooler, brighter and longer. Combine this with the strength of a polycarbonate lens; the RIGID SAE Compliant Lights represent the ultimate solution for your street-legal lighting in North America.



**PERFECT FOR  
ON ROAD AND  
OFF-ROAD USE**



## FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions May Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions May Apply)
- Fog Light is Compliant with SAEJ583
- Auxiliary High Beam Driving Light Compliant with SAE J581
- SAE 20"-30"SR-Series has Back-Lit Branding Plate that can be ran independently, or in tandem with the forward projecting LEDs

## SPECIFICATIONS



A = LUX AT 10 METERS

B = BEAM DISTANCE (m) WITH 1 LUX

C = BEAM DISTANCE (m) WITH .25 LUX

|                                    | SERIES/SIZE     | BLACK PAIR | WT. (LBS.) | WATTS | AMP DRAW @ 14VDC | LEDs | *RAW LUMENS | A   | B   | C   | **PEAK BEAM INTENSITY (cd) |
|------------------------------------|-----------------|------------|------------|-------|------------------|------|-------------|-----|-----|-----|----------------------------|
| <b>FOG LIGHT</b>                   | SR-M SERIES     | 902533     | 0.588      | 15    | 1.1              | 2    | 1179        | 69  | 83  | 116 | 6662                       |
| <b>FOG LIGHT</b>                   | D-SERIES        | 504813     | 1.10       | 22    | 1.5              | 4    | 1760        | 106 | 103 | 206 | 10570                      |
| <b>FOG LIGHT</b>                   | D-XL SERIES     | 321513     | 1.81       | 19    | 1.4              | 6    | 2315        | 116 | 108 | 215 | 11548                      |
| <b>FOG LIGHT</b>                   | SR-SERIES (6")  | 906703     | 1.78       | 21    | 1.5              | 6    | 2640        | 130 | 114 | 228 | 13030                      |
| <b>DRIVING AUXILIARY HIGH BEAM</b> | Q-SERIES        | 244813     | 2.8        | 140   | 10               | 16   | 8253        | 579 | 241 | 481 | 46486                      |
| <b>DRIVING AUXILIARY HIGH BEAM</b> | E-SERIES (6")   | 106613     | 2.35       | 41    | 2.85             | 12   | 5280        | 492 | 222 | 444 | 49230                      |
| <b>DRIVING AUXILIARY HIGH BEAM</b> | SR-SERIES (20") | 920413     | 4.7        | 95    | 6.8              | 28   | 8253        | 342 | 185 | 370 | 34263                      |
|                                    | SR-SERIES (30") | 930413     | 6.7        | 180   | 12.9             | 48   | 14148       | 745 | 273 | 546 | 74555                      |


\* Raw Lumens is based on LED manufacturer specifications. \*\* Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards. SPECIFICATIONS ARE DISPLAYED PER SINGLE LIGHT

## BEAM PATTERNS



Our custom-designed LUX graphs shown below visually demonstrate the distinct beam pattern created by each optic.

**DRIVING AUXILIARY HIGH BEAM / FOG LIGHT**



**SIDE VIEW**

# E-MARK COMPLIANT E<sub>11</sub>

RIGID's worldwide expansion means addressing the needs of customers in a global marketplace, including those that need lighting that complies with European standards. For these users, RIGID now offers E-Mark Compliant Lights (ECE). The E-Mark Compliance is a widely recognized mark in the automotive industry covering the safety requirements of automotive vehicles and their components across Europe.



## FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusion May Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI



- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions May Apply)



## SPECIFICATIONS

A = LUX AT 10 METERS

B = BEAM DISTANCE (m) WITH 1 LUX

C = BEAM DISTANCE (m) WITH .25 LUX

|                          | SERIES/<br>SIZE | SINGLE<br>PART NO | PAIR PART<br>NO | MAX LUM<br>INTENSITY# | CLASS | WT.<br>(LBS.) | WATTS | AMP<br>DRAW @<br>14VDC | LEDs | *RAW<br>LUMENS |      |     |     | **PEAK BEAM<br>INTENSITY<br>(cd) |
|--------------------------|-----------------|-------------------|-----------------|-----------------------|-------|---------------|-------|------------------------|------|----------------|------|-----|-----|----------------------------------|
|                          |                 |                   |                 |                       |       |               |       |                        |      |                | A    | B   | C   |                                  |
| ECE DRIVING              | SR (10")        | 91061EM           | 91161EM         | 7.5                   | A     | 2.50          | 52.4  | 3.8                    | 15   | 5625           | 290  | 170 | 341 | 29000                            |
|                          | SR (20")        | 92161EM           | -               | 12.5                  | A     | 5.43          | 120.1 | 7.61                   | 30   | 11250          | 685  | 262 | 523 | 68500                            |
|                          | E (6")          | 17561EM           | 17661EM         | 7.5                   | A     | 2.35          | 67.5  | 4.89                   | 18   | 6750           | 360  | 190 | 379 | 36000                            |
|                          | E (10")         | 17861EM           | 17961EM         | 10                    | A     | 3.45          | 75    | 5.43                   | 30   | 9000           | 482  | 220 | 439 | 48200                            |
|                          | E (20")         | 12161EM           | -               | 17.5                  | B     | 6.15          | 162   | 11.8                   | 60   | 18000          | 867  | 294 | 589 | 86700                            |
|                          | Q               | 54431EM           | -               | 12.5                  | A     | 2.8           | 69    | 4.9                    | 24   | 9000           | 360  | 190 | 379 | 35987                            |
| ECE SPOT                 | D-SERIES        | 20121EM           | 20221EM         | 17.5                  | B     | 1.10          | 15.8  | 1.1                    | 4    | 1568           | 646  | 254 | 508 | 64600                            |
|                          | SR (6")         | 90621EM           | 90721EM         | 17.5                  | B     | 1.78          | 23.5  | 1.7                    | 6    | 2250           | 730  | 270 | 540 | 73000                            |
|                          | SR (10")        | 91021EM           | 91121EM         | 30                    | B     | 2.5           | 35.9  | 2.6                    | 10   | 3750           | 1290 | 359 | 718 | 129000                           |
|                          | E (4")          | 10421EM           | 10431EM         | 27.5                  | B     | 1.90          | 30    | 2.17                   | 8    | 3000           | 1111 | 333 | 667 | 11100                            |
|                          | E (6")          | 10621EM           | 10631EM         | 37.5                  | B     | 2.35          | 45    | 3.26                   | 12   | 4500           | 1750 | 418 | 837 | 17500                            |
|                          | SR-Q            | -                 | 90521EM         | 10                    | B     | .75           | 15    | 1.1                    | 4    | 1568           | 458  | 214 | 428 | 17500                            |
| ECE SPOT/<br>FLOOD COMBO | SR (20")        | 92031EM           | -               | 37.5                  | B     | 2.72          | 75.9  | 5.5                    | 20   | 7500           | 1750 | 418 | 837 | 175000                           |
|                          | E (10")         | 11031EM           | 11041EM         | 30                    | B     | 3.45          | 65    | 4.71                   | 20   | 5740           | 1500 | 387 | 775 | 150000                           |

\* Raw Lumens is based on LED manufacturer specifications. \*\* Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards.




## BEAM PATTERNS

ECE DRIVING



ECE SPOT



ECE  
SPOT/FLOOD COMBO




# AMBER LIGHTS

Amber light has long been known to be more effective in murky conditions, including fog, extreme dust, and smoke. Desert racers have adopted Amber lighting as a better option to traditional white light when chasing down vehicles ahead of them. First responders appreciate having a dedicated amber lighting option when conditions render white light less effective. As a result, we offer dedicated Amber light bars to fill these needs and those of any application where conventional light is obstructed by adverse conditions.



## FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F - +145° F / -40° C - +60° C

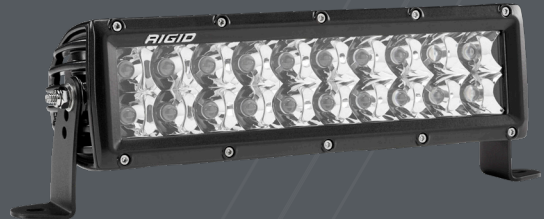

- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)
- Instant On / Off - No Warm Up

## D-SERIES AMBER LIGHTS



|                  | MOUNT | SINGLE PART # | PAIR PART # |
|------------------|-------|---------------|-------------|
| SPOT             | SM    | 201223        | 202223      |
|                  | FM    | 211223        | 212223      |
|                  | HD    | 221223        | 222223      |
| DRIVING          | SM    | 501323        | 502323      |
|                  | FM    | 511323        | 512323      |
|                  | HD    | 521323        | 522323      |
| FLOOD            | SM    | 201123        | 202123      |
|                  | FM    | 211123        | 212123      |
|                  | HD    | 221123        | 222123      |
| DRIVING DIFFUSED | SM    | -             | 502523      |
|                  | HD    | 521523        | 522523      |
| FLOOD DIFFUSED   | HD    | 221523        | 222523      |

## E-SERIES AMBER LIGHTS



|                  | SIZE | SINGLE PART # |
|------------------|------|---------------|
| SPOT             | 4"   | 10422         |
|                  | 6"   | 10622         |
|                  | 10"  | 11022         |
|                  | 20"  | 120223        |
|                  | 30"  | 130223        |
| SPOT/FLOOD COMBO | 40"  | 140223        |
|                  | 50"  | 150223        |
|                  | 6"   | 10632         |
|                  | 10"  | 11032         |
|                  | 20"  | 120323        |
| SPOT/FLOOD COMBO | 28"  | 128323        |
|                  | 30"  | 130323        |
|                  | 38"  | 138323        |
|                  | 40"  | 140323        |
|                  | 50"  | 150323        |

## SR-M AMBER LIGHTS



|          | MOUNT | SINGLE PART # | PAIR PART # |
|----------|-------|---------------|-------------|
| SPOT     | SM    | 90222         | -           |
|          | FM    | 92222         | -           |
| DRIVING  | SM    | 91232         | -           |
|          | FM    | 93232         | -           |
| DIFFUSED | SM    | 91252         | -           |
|          | FM    | 93252         | -           |

## SR-SERIES AMBER LIGHTS



|                  | SIZE | SINGLE PART # |
|------------------|------|---------------|
| SPOT             | 6"   | 90622         |
|                  | 10"  | 91022         |
| SPOT/FLOOD COMBO | 6"   | 90632         |
|                  | 10"  | 91032         |
|                  | 20"  | 92032         |
|                  | 30"  | 93032         |
|                  | 40"  | 94032         |
| DRIVING          | 50"  | 95032         |
|                  | 6"   | 90662         |
|                  | 10"  | 91062         |

## SR-Q AMBER LIGHTS



|         | MOUNT | SINGLE PART # | PAIR PART # |
|---------|-------|---------------|-------------|
| SPOT    | SM    | 90422         | 90522       |
|         | FM    | 92422         | 92522       |
| DRIVING | SM    | 91432         | 91532       |
|         | FM    | 93432         | 93532       |

(SM) = Surface Mount, (FM) = Flush Mount, (HD) = All Black Heavy Duty

# MIL-STD-461F EMI COMPLIANT

RIGID's MIL-STD-461F Compliant lights meet stringent military standards and are designed to withstand the harshest work environments. Using RIGID's forward projecting LED lighting technology, the patented optics capture the maximum amount of light emitted from the individual LEDs, creating a brilliant white light that delivers a reliable 50,000 hour lifespan. When lighting options demand military-grade reliability, the MIL-STD-461F EMI Compliant light is the total lighting solution.



## FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)



## SPECIFICATIONS

A = LUX AT 10 METERS

B = BEAM DISTANCE (m) WITH 1 LUX


C = BEAM DISTANCE (m) WITH .25 LUX

|                          | SERIES SIZE/MOUNT | SINGLE PART NO. | PAIR PART NO. | WT (LBS.) | WATTS | AMP DRAW @ 14VDC | LEDs | RAW LUMENS | A    | B   | C   | PEAK BEAM INTENSITY(cd) |
|--------------------------|-------------------|-----------------|---------------|-----------|-------|------------------|------|------------|------|-----|-----|-------------------------|
| <b>DRIVING DIFFUSED</b>  | D (HD)            | 521513MIL       | -             | 1.40      | 34.5  | 2.40             | 6    | 3096       | 22   | 47  | 94  | 2200                    |
|                          | D (HD)            | -               | 522513MIL     | 2.80      | 34.5  | 2.40             | 6    | 6192       | 41   | 64  | 128 | 4118                    |
| <b>FLOOD</b>             | E (6")            | 106113MIL       | -             | 2.35      | 45    | 3.13             | 12   | 4500       | 156  | 125 | 250 | 15615                   |
|                          | E (10")           | 110116MIL       | -             | 3.45      | 75    | 5.21             | 20   | 5740       | 237  | 154 | 308 | 23968                   |
| <b>DRIVING</b>           | D (HD)            | 521313MIL       | -             | 1.40      | 34.5  | 2.40             | 6    | 3096       | 166  | 129 | 258 | 16586                   |
|                          | D (HD)            | -               | 522313MIL     | 2.80      | 34.5  | 2.40             | 6    | 6192       | 304  | 174 | 349 | 30370                   |
| <b>SPOT</b>              | E (6")            | 106213MIL       | -             | 2.35      | 45    | 3.13             | 12   | 4500       | 1612 | 402 | 803 | 161198                  |
|                          | E (10")           | 110213MIL       | -             | 3.45      | 75    | 5.21             | 20   | 5740       | 2460 | 496 | 992 | 245953                  |
| <b>FLOOD/ SPOT COMBO</b> | E (6")            | 106313MIL       | -             | 2.35      | 45    | 3.13             | 12   | 4500       | 687  | 262 | 524 | 68668                   |
|                          | E (10")           | 110313MIL       | -             | 3.45      | 62    | 4.31             | 20   | 5740       | 1756 | 419 | 838 | 175555                  |

\* Raw Lumens is based on LED manufacturer specifications. \*\*Distance with .25 lux and Peak Beam Intensity are tested using ANSI/NEMA FL standards. (HD) = All Black Heavy Duty



## BEAM PATTERN

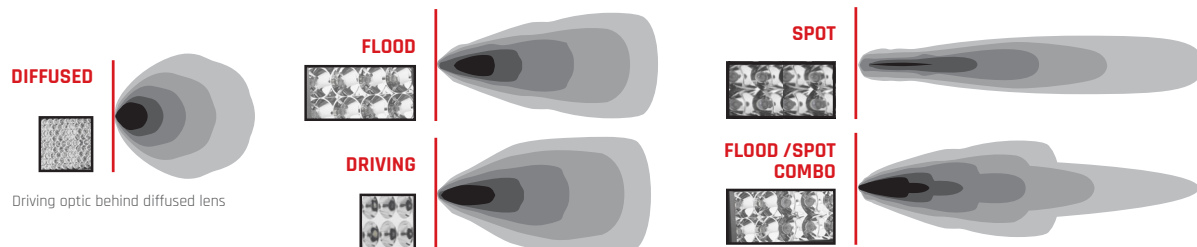


# INFRARED LIGHTS

Certain applications require a stealthy light source, and the Infrared LED Lights by RIGID offers an excellent solution. RIGID combines special LED lighting configurations and optics to provide a high-powered infrared light source that brings stealth to a new level. These infrared lights produce a beam of energy at 940 nanometers, which is considered invisible light. These lights are useful for enhancing night vision ability for military personnel, public safety, security services, and many other applications that utilize infrared technology.



## FEATURES

- 50,000+ Hour Lifespan
- 9-36 VDC
- Durable UV Polyester Powder Coat
- GORE® Pressure Equalizing Vent
- Harness & Switch Included (Exclusions Apply)
- High-Grade Aluminum Alloy Heatsink
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Mounting Brackets Included
- Over / Under Voltage Protection
- Operating Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology

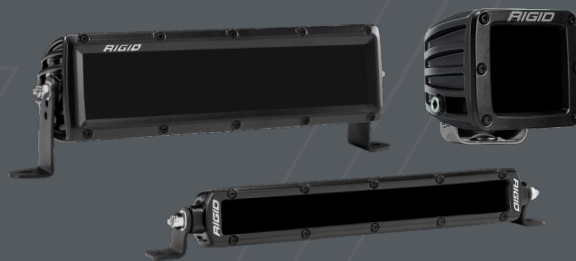

- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Waterproof Deutsch Connector (Exclusions Apply)
- 940 nm Infrared Illuminated beam
- Tinted CR-39® Lens to Eliminate all Reflective Surfaces within the Housing

## SPECIFICATIONS




|                          | SERIES SIZE | SINGLE PART NO. | PAIR PART NO. | WEIGHT (LBS.) | WATTS | AMP DRAW @ 14VDC | LEDs | RAW LED MW OUTPUT | E-lm OUTPUT | E-cd   |
|--------------------------|-------------|-----------------|---------------|---------------|-------|------------------|------|-------------------|-------------|--------|
| <b>SPOT</b>              | D-SERIES    | 201293          | 202293        | 1.1           | 17.5  | 1.25             | 4    | 3960              | 1584        | 64200  |
| <b>DRIVING</b>           | D-SERIES    | 501393          | 502393        | 1.1           | 32.2  | 2.3              | 6    | 5940              | 2376        | 13376  |
| <b>FLOOD/ SPOT COMBO</b> | SR (10")    | 91039           | -             | 2.72          | 34.5  | 2.46             | 10   | 9900              | 3960        | 89760  |
|                          | E (4")      | 10439           | -             | 1.9           | 35.8  | 2.56             | 8    | 7920              | 3168        | 43648  |
|                          | E (10")     | 110392          | -             | 3.45          | 46    | 3.28             | 20   | 19800             | 7920        | 206968 |

E-lm - Lumen Equivalent / E-cd - Candela Equivalent

## NIGHT VISION



## NIGHT VISION WITH INFRARED LIGHT

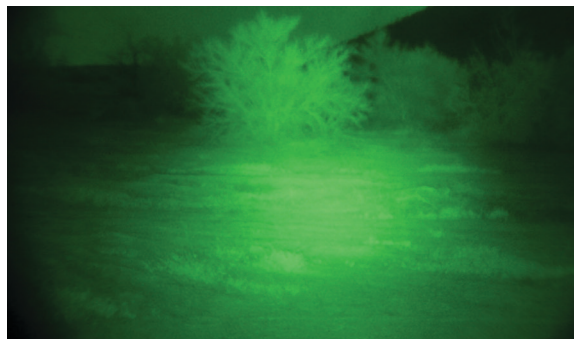

# LIGHTING KITS

pg 110 - pg 114



# IGNITE™ BACK-UP KITS

Most vehicles have very inadequate backup lighting, which can be a major safety problem. RIGID makes it easy to add compact and powerful backup lighting to any vehicle with the RIGID Ignite™ Backup Kit. The Ignite Series Accessory Lights are small but pack a lot of power with 1000 raw lumens in a light that measures just 1.4" x 1.4" x 2". While a wiring harness is not included, the powerful LEDs in each light consume less than one amp each, so powering them is often as easy as tapping into the vehicle's existing backup lighting circuit.



## FEATURES


- Small Package, Big Output
- IP68 Compliant
- RIGID Quality & Performance
- Unlimited Mounting Options
- (Surface Mount);  
Mates To Any Go-Pro® Case Mount
- Easy (Flush Mount) Install
- Using 1.75" Hole saw
- Low Minimum Voltage; 6-28 VDC
- See pg. 34 for Additional Features




## DIMENSIONS & MOUNTS



### SURFACE MOUNT

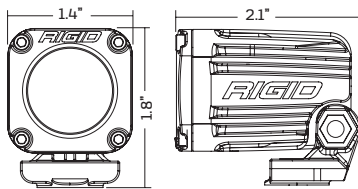

### FLUSH MOUNT

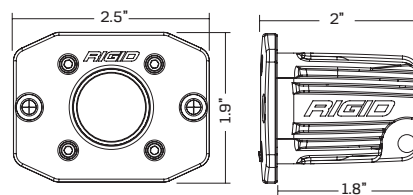

## SPECIFICATIONS



|                 | MOUNT | KIT PART NO. | WT. (OZ) | WATTS | AMP DRAW @ 14VDC | LEDs | *RAW LUMENS | A | B  | C  | **PEAK BEAM INTENSITY(cd) |
|-----------------|-------|--------------|----------|-------|------------------|------|-------------|---|----|----|---------------------------|
| <b>DIFFUSED</b> | SM    | 20541        | 3.8      | 12    | 0.48             | 1    | 1000        | 9 | 29 | 60 | 885                       |
|                 | FM    | 20641        | 3.8      | 12    | 0.84             | 1    | 1000        | 9 | 29 | 60 | 885                       |

A = LUX AT 10 METERS

B = BEAM DISTANCE (m) WITH 1 LUX

C = BEAM DISTANCE (m) WITH .25 LUX

### KIT INCLUDES

- 2 Ignite Lights (Surface or Flush Mount)
- 2 Sets of Hardware
- 48" Wire Leads
- 2 Mounting Brackets (Surface)

# IGNITE™ MOTORCYCLE KITS

RIGID's Ignite is compact yet powerful, packing 1000 raw lumens in a housing that measures just 1.4" x 1.4" x 2" and weighs less than 4 ounces. Each Ignite Light also consumes just 1 amp at full power. The Motorcycle Kits have both High and Low settings that enable the lights to easily work with a sealed control switch suitable for permanently mounting the lights just about anywhere on the bike. With the Ignite Motorcycle Kit, it's easier than ever to add lights to touring bikes, cruisers, dirt bikes, and just about any other application.





## FEATURES

- Small Package, Big Output
- IP68 Compliant
- RIGID Quality & Performance
- Unlimited Mounting Options
- (Surface Mount);  
Mates To Any Go-Pro® Case Mount
- Using 1.75" Hole saw
- Low Minimum Voltage; 6-28 VDC
- 2 Outputs; High & Low
- See pg. 34 for Additional Features



## DIMENSIONS & MOUNTS

### SURFACE MOUNT



A = LUX AT 10 METERS

B = BEAM DISTANCE (m) WITH 1 LUX

C = BEAM DISTANCE (m) WITH .25 LUX



## SPECIFICATIONS HIGH / LOW

|              | MOUNT | KIT PART NO. | WT. (OZ) | WATTS  | AMP DRAW @ 14VDC | LEDs | *RAW LUMENS | A        | B        | C        | **PEAK BEAM INTENSITY(cd) |
|--------------|-------|--------------|----------|--------|------------------|------|-------------|----------|----------|----------|---------------------------|
| <b>FLOOD</b> | SM    | 20741        | 3.8      | 12 / 2 | 0.84 / 0.14      | 1    | 1000 / 200  | 18 / 2   | 42 / 11  | 80 / 23  | 1786 / 239                |
| <b>SPOT</b>  | SM    | 20731        | 3.8      | 12 / 2 | 0.85 / 0.14      | 1    | 1000 / 200  | 139 / 43 | 118 / 43 | 236 / 87 | 13939 / 1895              |



## KIT INCLUDES

- 2 Ignite Lights High / Low Lights
- 2 Sets of Hardware
- 2 Mounting Brackets
- 1 Wiring Harness & Switch

# BRANDON PALANIUK SIGNATURE SERIES BOAT DECK LIGHT KITS

Created specifically for night fishing, RIGID's Boat Deck Light Kits provide a simple and effective way to illuminate boat decks for night use without blinding boat occupants. These kits consist of four or six A-Series lights with a dedicated 27' harness that can handle installations on boats up to 24' in length. The A-Series LED lights feature water resistant die cast aluminum housings, polycarbonate lens and a built-in thermal management system that ensures long life. The kit includes switches, mounting hardware, wiring and a power distribution block(s) for a simple and clean install. A variety of colors and color combinations are available to accommodate your own personal style or needs.



## FEATURES

- 50,000+ Hour Lifespan
- 9-24 VDC
- Durable UV Polyester Powder Coat
- Integrated Thermal Management System
- Impact Resistant Polycarbonate Lens
- IP68 Compliant - Dust / Water Ingress
- Over / Under Voltage Protection
- Op. Temp -40° F ~ +145° F / -40° C ~ +60° C
- Protected Against RFI / EMI
- Patented Technology
- Reverse Polarity Protection
- RoHS Compliant
- SAE J575 Compliant - Shock / Vibration
- Custom Wiring Harness (Up to 24' Fishing Boat)
- Available in 4 and 6 Light Options
- Multiple Color Choices



## SPECIFICATIONS



|                    | KIT PART NO.         | WATTS  | AMP DRAW @ 14VDC | LEDs | *RAW LUMENS | Number of Distribution Blocks | Number of Switches |   |
|--------------------|----------------------|--------|------------------|------|-------------|-------------------------------|--------------------|---|
| <b>4 LIGHT KIT</b> | Cool White           | 400763 | 16               | 0.8  | 12          | 800                           | 1                  | 1 |
|                    | Blue                 | 400773 | 16               | 0.8  | 12          | 800                           | 1                  | 1 |
|                    | Red                  | 400783 | 16               | 0.8  | 12          | 800                           | 1                  | 1 |
|                    | Green                | 400793 | 16               | 0.8  | 12          | 800                           | 1                  | 1 |
|                    | Amber                | 400803 | 16               | 0.8  | 12          | 800                           | 1                  | 1 |
|                    | (2) White, (2) Blue  | 400813 | 16               | 0.8  | 12          | 800                           | 2                  | 2 |
|                    | (2) White, (2) Red   | 400823 | 16               | 0.8  | 12          | 800                           | 2                  | 2 |
|                    | (2) White, (2) Green | 400833 | 16               | 0.8  | 12          | 800                           | 2                  | 2 |
|                    | (2) White, (2) Amber | 400843 | 16               | 0.8  | 12          | 800                           | 2                  | 2 |
| <b>6 LIGHT KIT</b> | Cool White           | 400853 | 24               | 1.2  | 18          | 1200                          | 1                  | 1 |
|                    | Blue                 | 400863 | 24               | 1.2  | 18          | 1200                          | 1                  | 1 |
|                    | Red                  | 400873 | 24               | 1.2  | 18          | 1200                          | 1                  | 1 |
|                    | Green                | 400883 | 24               | 1.2  | 18          | 1200                          | 1                  | 1 |
|                    | Amber                | 400893 | 24               | 1.2  | 18          | 1200                          | 1                  | 1 |
|                    | (2) White, (4) Blue  | 400903 | 24               | 1.2  | 18          | 1200                          | 2                  | 2 |
|                    | (2) White, (4) Red   | 400913 | 24               | 1.2  | 18          | 1200                          | 2                  | 2 |
|                    | (2) White, (4) Green | 400923 | 24               | 1.2  | 18          | 1200                          | 2                  | 2 |
|                    | (2) White, (4) Amber | 400933 | 24               | 1.2  | 18          | 1200                          | 2                  | 2 |

## KIT INCLUDES

- (4) or (6) A-Series w/ 15' Leads
- Distribution Block(s) for Easy Wiring
- 27' Wiring Harness w/ Fuse & Switch
- Mounting Pads
- 3 Amp Blade Fuses (4 or 6)
- 1 or 2 Switches (1 or 2 Colors)

# UV BLACK LIGHT KITS

The UV Black Light Kits were designed exclusively with the night fisherman in mind. The UV Black Light Kits will illuminate fluorescent fishing line, making it easy to detect subtle bites. The added SR-M PRO Driving Light Kit helps with making precise casts down the bank or to aide in netting a catch. Both lights include a 15' cord with a cigarette lighter adapter as well as a triple suction cup mount, making it easy to aim the light exactly where you want it anywhere on the boat. Whether you're a professional angler or you just enjoy night fishing, the RIGID UV Black Light Kits will help increase the success of any night fisherman.



## SINGLE LIGHT KIT



**PART# 401083**

### **KIT INCLUDES**

- SR-M Driving Diffused UV Light
- Triple Suction Cup Mount
- 15ft. DC Cigarette Lighter Adapter with switch

## COMBO LIGHT KIT



**PART# 401073**

### **KIT INCLUDES**

- SR-M Driving Diffused UV Light
- SR-M PRO Driving Light
- Green Light Cover
- Triple Suction Cup Mount
- 15ft. DC Cigarette Lighter Adapter with switch

# TROLLING MOTOR MOUNT LIGHT KIT

Available for several popular models of the Minn Kota® Fortrex® trolling motor, this mounting kit replaces the original diversion plate mounted on the nose of the trolling motor mount. The housing is constructed of PA66 glass filled nylon and shock-absorbing silicone rubber, while a 25' plug-and-play harness makes installation easy. This lighting kit makes it simple to see what's dead ahead without overpowering normal night vision. The kit even includes an amber lens cover for use in fog or rain.



## TMM LIGHT KIT



**PART# 400033**

### **KIT INCLUDES**

- Minn Kota® Fortrex® Trolling Motor Mount
- 25 ft. Plug and Play Harness with Waterproof Switch
- SR-M PRO Driving LED Light
- Amber Lens Cover

- Compatible with Minn Kota® Fortrex® 80, 101, 101H, and 112
- DISCLAIMER: Not compatible with boat models where factory navigation lights are installed in the forward most portion of the rub rail at the bow of the boat.

# ROCK LIGHT KITS

The RIGID Rock Light Kit uses the power and durability of A-Series LED lighting and adds custom 15' leads on each light, a distribution block, plus switch and angled mounts to light any truck, Jeep, or all-terrain vehicle. This kit will allow you to light up the trail with strategically placed lights on the vehicle. Perfect for night rock-crawling, the LED lights are available in a variety of colors, including white, red, blue, green, or amber to aid night vision or accent vehicle colors. Rock Light Kits are available in 4-light or 6-light configurations to enhance and customize your night crawling experience.

## 4 LIGHT KIT

| LIGHT COLOR | KIT PART NO. |
|-------------|--------------|
| White       | 400203       |
| Red         | 400213       |
| Green       | 400223       |
| Blue        | 400233       |
| Amber       | 400243       |
| White       | 400253       |
| Red         | 400263       |
| Green       | 400273       |
| Blue        | 400283       |
| Amber       | 400293       |

## 6 LIGHT KIT

### KIT INCLUDES

- A-Series with 15' Leads
- Distribution Block for Easy Wiring
- 8' Wiring Harness
- Angled Mounting Pads w/30° Angle
- Mounting Hardware



# BACK-UP LIGHT KITS

Most factory back-up lights are inadequate for being able to clearly see what's behind the vehicle while in reverse. The SR-Q Series PRO Back Up Light Kit is a sleek low profile lighting solution that packs more lighting output than ever before. Thanks to recent improvements to the advanced LED circuitry inside, the SR-Q Series PRO now emits 3,168 raw lumens.



### FEATURE

- 3 POSITION SWITCH OPTIONS: on, off and auto with reverse

## SR-Q PRO KIT

| MOUNT | KIT PART NO. |
|-------|--------------|
| SM    | 980023       |
| FM    | 980033       |
| SM    | 980003       |
| FM    | 980013       |

## SR-M PRO KIT

### KIT INCLUDES

- (2) SR-Q PRO Surface or Flush Mount Flood Diffusion Lights
- OR
- (2) SR-M PRO Surface or Flush Mount Flood Diffusion Lights
- 25' Wiring Harness with Switch
- Mounting Hardware
- Black Covers for Pair of Lights (SM ONLY)

(SM) = Surface Mount  
(FM) = Flush Mount



# GRILLES & OE MOUNTS

pg 117 - pg 131

# ACCESSORIES

pg 133 - pg 136

## **BUILD INCLUDES**

Toyota Tacoma Grille | PG. 128

Toyota Tacoma SAE Kit | PG. 129

Toyota Tacoma Bumper Mount | PG. 129






# VEHICLE SPECIFIC

## ARCTIC CAT®

### ARCTIC CAT GRILLE MOUNT

Wildcat®  
2012-2016  
46521  
(1) 10" SR-Series Pro  
Light Sold Separately

|                 |  |
|-----------------|--|
| <b>MODEL</b>    |  |
| <b>YEAR</b>     |  |
| <b>PART NO.</b> |  |
| <b>FITS</b>     |  |
| <b>NOTE</b>     |  |



|                 |                                      |
|-----------------|--------------------------------------|
| <b>MODEL</b>    | ATV                                  |
| <b>YEAR</b>     | N/A                                  |
| <b>PART NO.</b> | 40630                                |
| <b>FITS</b>     | (1) 6" E Pro or (1) 6" SR-Series Pro |
| <b>NOTE</b>     | Light Sold Separately                |

### ATV HANDLEBAR MOUNT

## ATV

### ATV HANDLEBAR MOUNT

ATV  
N/A  
40230  
(2) D-Series Pro  
Lights Sold Separately

|                 |  |
|-----------------|--|
| <b>MODEL</b>    |  |
| <b>YEAR</b>     |  |
| <b>PART NO.</b> |  |
| <b>FITS</b>     |  |
| <b>NOTE</b>     |  |



|                 |                                    |
|-----------------|------------------------------------|
| <b>MODEL</b>    | ATV                                |
| <b>YEAR</b>     | N/A                                |
| <b>PART NO.</b> | 41030                              |
| <b>FITS</b>     | (1) 10" E or (1) 10" SR-Series Pro |
| <b>NOTE</b>     | Lights Sold Separately             |

## CAN AM®

### MAVERICK® X DS HOOD MOUNT

Maverick X  
2014-2016  
46549  
(1) 10" SR-Series Pro  
Light Sold Separately

|                 |  |
|-----------------|--|
| <b>MODEL</b>    |  |
| <b>YEAR</b>     |  |
| <b>PART NO.</b> |  |
| <b>FITS</b>     |  |
| <b>NOTE</b>     |  |



### MAVERICK X3 DOME LIGHT KIT

|                 |                |
|-----------------|----------------|
| <b>MODEL</b>    | Maverick X3    |
| <b>YEAR</b>     | 2017 +         |
| <b>PART NO.</b> | 41635          |
| <b>FITS</b>     | (1) A-Series   |
| <b>NOTE</b>     | INCLUDES LIGHT |

### MAVERICK X DS ROOF MOUNT

Maverick X  
2014-2016  
46548  
(1) 40" RDS-Series Pro  
Light Sold Separately

|                 |  |
|-----------------|--|
| <b>MODEL</b>    |  |
| <b>YEAR</b>     |  |
| <b>PART NO.</b> |  |
| <b>FITS</b>     |  |
| <b>NOTE</b>     |  |



### MAVERICK X3 DOME MOUNT

|                 |                       |
|-----------------|-----------------------|
| <b>MODEL</b>    | Maverick X3           |
| <b>YEAR</b>     | 2017 +                |
| <b>PART NO.</b> | 41636                 |
| <b>FITS</b>     | (1) A-Series          |
| <b>NOTE</b>     | Light Sold Separately |

### MAVERICK X DS ROCK KIT

Maverick X  
2014-2016  
46551  
(4) A-Series  
Light Sold Separately

|                 |  |
|-----------------|--|
| <b>MODEL</b>    |  |
| <b>YEAR</b>     |  |
| <b>PART NO.</b> |  |
| <b>FITS</b>     |  |
| <b>NOTE</b>     |  |



### MAVERICK X3 SHOCK MOUNT

|                 |   |
|-----------------|---|
| <b>MODEL</b>    | Maverick X3   |
| <b>YEAR</b>     | 2017 +  |
| <b>PART NO.</b> | 41630   |
| <b>FITS</b>     | (2) D-Series PRO,<br>(2) D-SS Series PRO,<br>(2) SR-M Series PRO,<br>And/Or (1) 10" SR-Series PRO |
| <b>NOTE</b>     | Light Sold Separately   |

### MAVERICK X DS REVERSE MOUNT

Maverick X (Turbo Only)  
2014-2016  
46550  
(2) D-Series® Pro (2) SR-M® Pro  
or (1) SR-Q® Pro Series  
Light Sold Separately

|                 |  |
|-----------------|--|
| <b>MODEL</b>    |  |
| <b>YEAR</b>     |  |
| <b>PART NO.</b> |  |
| <b>FITS</b>     |  |
| <b>NOTE</b>     |  |



### MAVERICK X3 A-PILLAR MOUNT

|                 |  |
|-----------------|--|
| <b>MODEL</b>    | Maverick X3  |
| <b>YEAR</b>     | 2017 +   |
| <b>PART NO.</b> | 41632  |
| <b>FITS</b>     | (1) D-Series PRO,<br>(2) D-SS Series PRO,<br>(2) SR-M Series PRO, (2) Ignite |
| <b>NOTE</b>     | Light Sold Separately  |

### MAVERICK X3 REVERSE MOUNT

Maverick X3  
2017 +  
41639  
(2) SR-M Series PRO  
Light Sold Separately

|                 |  |
|-----------------|--|
| <b>MODEL</b>    |  |
| <b>YEAR</b>     |  |
| <b>PART NO.</b> |  |
| <b>FITS</b>     |  |
| <b>NOTE</b>     |  |



### MAVERICK X3 ROOF MOUNT

|                 |   |
|-----------------|---|
| <b>MODEL</b>    | Maverick X3   |
| <b>YEAR</b>     | 2017 +  |
| <b>PART NO.</b> | 41634   |
| <b>FITS</b>     | (1) 40" RDS-Series PRO,<br>(1) 40" E-Series PRO,<br>(1) 40" SR-Series PRO |
| <b>NOTE</b>     | Light Sold Separately   |

### MAVERICK X3 REVERSE MOUNT

Maverick X3  
2017 +  
41639  
(2) SR-M Series PRO  
Light Sold Separately

|                 |  |
|-----------------|--|
| <b>MODEL</b>    |  |
| <b>YEAR</b>     |  |
| <b>PART NO.</b> |  |
| <b>FITS</b>     |  |
| <b>NOTE</b>     |  |





# VEHICLE SPECIFIC


CHEVY®

WANT TO SEE  
INSTALLED  
GRILLES? VISIT  
OUR WEBSITE &  
SEARCH BY  
PART NO.




### CHEVY RDS-SERIES LED GRILLE KITS

**MODEL** Silverado® 2500/3500  
**YEAR** 2015-2017  
**PART NO.** 41586  
**FITS** (1) 30" RDS-Series Pro  
**NOTE** INCLUDES LIGHT



### CHEVY LED GRILLES

**MODEL** Silverado 1500 Z71  
**YEAR** 2014-2015  
**PART NO.** 40576  
**FITS** (2) 6" & (1) 10" SR-Series Pro  
**NOTE** Lights Sold Separately



**MODEL** Silverado 2500/3500  
**YEAR** 2011-2014  
**PART NO.** 40564  
**FITS** (2) D-Series Pro & (1) 10" SR-Series Pro  
**NOTE** Lights Sold Separately



**MODEL** Silverado 1500  
**YEAR** 2007.5-2013  
**PART NO.** 40565  
**FITS** (2) SR-M Pro & (1) 6" SR-Series Pro  
**NOTE** Lights Sold Separately



### CHEVY FOG LIGHT MOUNTS

**MODEL** 1500  
**YEAR** 2014-2015  
**PART NO.** 46517  
**FITS** (4) SR-M Pro or (2) SR-Q Pro  
**NOTE** Lights Sold Separately



**MODEL** 1500, 2500/3500  
**YEAR** 2007-2013 2007-2010  
**PART NO.** 40337  
**FITS** (4) D-Series Pro  
**NOTE** Lights Sold Separately

**MODEL** 2500/3500  
**YEAR** 2015-2017  
**PART NO.** 46535  
**FITS** (1) DXL Pro or (2) D-Series Pro  
**NOTE** Lights Sold Separately



**MODEL** 2500/3500  
**YEAR** 2011-2014  
**PART NO.** 40338  
**FITS** (4) D-Series Pro  
**NOTE** Lights Sold Separately

**MODEL** Colorado  
**YEAR** 2015-2017  
**PART NO.** 46579  
**FITS** (2) D-Series Pro  
**NOTE** Lights Sold Separately



**MODEL** Colorado  
**YEAR** 2015-2017  
**PART NO.** 46583  
**FITS** (2) D-Series Pro  
**NOTE** D-Series SAE Set Included

**MODEL** Tahoe / Suburban / Avalanche  
**YEAR** 2007-2013  
**PART NO.** 46577  
**FITS** (2) D-Series Pro  
**NOTE** Lights Sold Separately



**MODEL** Tahoe / Suburban / Avalanche  
**YEAR** 2007-2013  
**PART NO.** 46582  
**FITS** (2) D-Series Pro  
**NOTE** D-Series SAE Set Included

### CHEVY BUMPER MOUNTS

**MODEL** Colorado  
**YEAR** 2015-2017  
**PART NO.** 46573  
**FITS** (1) 30" SR-Series Pro  
**NOTE** Lights Sold Separately



**MODEL** 2500/3500  
**YEAR** 2015-2017  
**PART NO.** 46536  
**FITS** (2) 6" E or (2) SR-Series Pro  
**NOTE** Lights Sold Separately

**MODEL** 2500/3500  
**YEAR** 2011-2014  
**PART NO.** 40339  
**FITS** (1) 20" E Pro or (1) SR-Series Pro  
**NOTE** Lights Sold Separately



**MODEL** 1500 & 2500/3500  
**YEAR** 2011-2013 2007-2010  
**PART NO.** 40336  
**FITS** (1) 20" SR-Series Pro  
**NOTE** Light Sold Separately

# VEHICLE SPECIFIC

## DODGE®

### DODGE RDS-SERIES GRILLE KITS


RAM® 1500  
2015-2017  
41585  
(1) 30" RDS-Series Pro  
INCLUDES LIGHT

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



RAM 1500  
2009-2012  
41593  
(1) 30" RDS-Series Pro  
INCLUDES LIGHT

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



RAM 2500-3500  
2013-2017  
41588  
(1) 30" RDS-Series Pro  
INCLUDES LIGHT

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



RAM 2500-3500  
2010-2012  
41578  
(1) 20" RDS-Series Pro  
INCLUDES LIGHT

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**RDS LIGHT BARS  
INCLUDED WITH  
RDS GRILLES**

### DODGE BUMPER MOUNTS

RAM 2500/3500  
2004-2017  
40240  
(1) 20" SR-Series Pro  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



### DODGE FOG LIGHT MOUNTS

RAM 1500 & 2500/3500  
2009-2012 2010-2017  
46510  
(4) D-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**




**MODEL** RAM 1500 & 2500/3500  
**YEAR** 2002-2008 2003-2009  
**PART NO.** 46541  
**FITS** (2) D-Series Pro  
**NOTE** Lights Sold Separately

## FORD®

### FORD RDS-SERIES GRILLE KITS

Raptor® SVT® (Without Camera)  
2009-2015  
41572  
(1) 30" RDS-Series Pro  
INCLUDES LIGHT

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



Raptor SVT (With Camera)  
2009-2015  
41571  
(1) 30" RDS-Series Pro  
INCLUDES LIGHT

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



# VEHICLE SPECIFIC

FORD®

**SECURITY  
HARDWARE  
INCLUDED WITH  
THIS GRILLE**



## FORD RDS-SERIES GRILLE KITS

**MODEL** Super Duty®  
**YEAR** 2011-2016  
**PART NO.** 41580  
**FITS** (1) 30" RDS-Series Pro  
**NOTE** INCLUDES LIGHT



**MODEL** F-150  
**YEAR** 2015-2017  
**PART NO.** 41550  
**FITS** (1) 30" RDS-Series Pro  
**NOTE** INCLUDES LIGHT & SECURITY HARDWARE




**MODEL** F-150®  
**YEAR** 2013-2014  
**PART NO.** 41582  
**FITS** (1) 30" RDS-Series Pro  
**NOTE** INCLUDES LIGHT


## FORD GRILLE KITS




**MODEL** F-150  
**YEAR** 2009-2012  
**PART NO.** 40558  
**FITS** (2) 6" & (1) 10" SR-Series Pro  
**NOTE** Lights Sold Separately



**MODEL** F-150  
**YEAR** 2004-2008  
**PART NO.** 40587  
**FITS** (1) 20" E-Series Pro  
**NOTE** Light Sold Separately

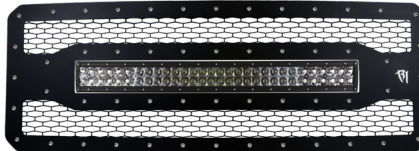

**MODEL** Super Duty  
**YEAR** 2011-2016  
**PART NO.** 40566  
**FITS** (1) 30" E-Series Pro  
**NOTE** Light Sold Separately



**MODEL** Super Duty  
**YEAR** 2008-2010  
**PART NO.** 40567-FX4 or 40577-Non FX4  
**FITS** (2) D-Series Pro & (1) 20" E-Series Pro  
**NOTE** Lights Sold Separately

Raptor  
2017-2018  
41612  
(2) 6" SR-Series Pro Driving  
INCLUDES LIGHT

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



Super Duty  
2017-2018  
41618  
(2) 6" SR-Series Pro Driving  
INCLUDES LIGHT

Raptor  
2017-2018  
41613  
(2) 6" SR-Series Pro Driving  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



F-150  
2009-2012  
40558  
(2) 6" SR-Series Pro Driving  
Lights Sold Separately

# VEHICLE SPECIFIC

## FORD

### FORD BUMPER MOUNTS

Raptor  
2009-2015  
40133  
(1) 20" E-Series Pro  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Raptor  
2009-2015  
40134  
(2) 4" E-Series Pro  
Light Sold Separately

F-150  
2009-2014  
46529  
(1) 20" E-Series Pro  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Raptor  
2009-2015  
40236  
(1) 40" E-Series Pro  
Light Sold Separately

Super Duty  
2011-2016  
46544  
(1) 40" RDS Pro or (1) 40" E-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Super Duty  
2011-2015  
40136  
(1) 20" E or SR-Series Pro  
Lights Sold Separately

F-150  
2006-2008  
46519  
(1) 20" E or SR Pro Series,  
or (2) 20" SR-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Super Duty  
2008-2010  
46545  
(1) 20" E-Series Pro/Radiance Plus,  
(1) 20" RDS-Series Pro, (1) 20"  
SR-Series Pro, or (2) 20" SR-Series Pro  
Lights Sold Separately

### FORD FOG LIGHT MOUNTS

Raptor  
2009-2015  
40235  
(4) D-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



F-150  
2015-2017  
46555  
(4) D-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

F-150  
2006-2014  
46527  
(2) D-Series Pro  
Lights Sold Separately

Super Duty  
1999-2016  
46503  
(2) D-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Super Duty  
2011-2016  
46504  
(2) Q-Series  
Lights Sold Separately

Raptor  
2017-2018  
41610  
(6) D-Series Pro  
(SAE Fog, Spot, Driving)  
LIGHTS INCLUDED

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Raptor  
2017-2018  
41611  
(6) D-Series Pro  
(SAE Fog, Spot, Driving)  
Lights Sold Separately

Super Duty  
2017-2018  
41614  
(2) D-Series SAE Fog  
LIGHTS INCLUDED

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Super Duty  
2017-2018  
41615  
(2) D-Series SAE Fog  
Lights Sold Separately

Super Duty  
2017-2018  
41616  
(4) D-Series (SAE Fog, Driving)  
LIGHTS INCLUDED

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Super Duty  
2017-2018  
41617  
(4) D-Series (SAE Fog, Driving)  
Lights Sold Separately

### FORD A-PILLAR MOUNT

Raptor  
2017-2018  
41626  
(2) D-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



# VEHICLE SPECIFIC

**GMC®**

## GMC RDS-SERIES GRILLE KITS



**MODEL** 1500  
**YEAR** 2016-2017  
**PART NO.** 41599  
**FITS** (1) 30" RDS-Series Pro  
**NOTE** INCLUDES LIGHT



**MODEL** 1500  
**YEAR** 2011-2013  
**PART NO.** 41589  
**FITS** (1) 20" RDS-Series Pro  
**NOTE** INCLUDES LIGHT



**MODEL** 2500/3500  
**YEAR** 2015-2017  
**PART NO.** 41584  
**FITS** (1) 30" RDS-Series Pro  
**NOTE** INCLUDES LIGHT



**MODEL** 2500/3500  
**YEAR** 2011-2014  
**PART NO.** 41590  
**FITS** (1) 20" RDS-Series Pro  
**NOTE** INCLUDES LIGHT




**MODEL** Yukon®  
**YEAR** 2015-2017  
**PART NO.** 41592  
**FITS** (1) 30" RDS-Series Pro  
**NOTE** INCLUDES LIGHT



**MODEL** Canyon®  
**YEAR** 2015-2017  
**PART NO.** 41595  
**FITS** (1) 30" RDS-Series Pro  
**NOTE** INCLUDES LIGHT

**LASER CUT 304  
 STAINLESS STEEL  
 CONSTRUCTION**

## GMC GRILLE KITS



**MODEL** 1500  
**YEAR** 2014-2015  
**PART NO.** 40573  
**FITS** (2) D-Series Pro & (1) 20" E-Series Pro  
**NOTE** Lights Sold Separately



**MODEL** 1500  
**YEAR** 2011-2013  
**PART NO.** 40568  
**FITS** (2) D-Series Pro & (1) 10" E-Series Pro  
**NOTE** Lights Sold Separately



**MODEL** 2500/3500  
**YEAR** 2011-2014  
**PART NO.** 40569  
**FITS** (2) D-Series Pro & (1) 10" E-Series Pro  
**NOTE** Lights Sold Separately

# VEHICLE SPECIFIC

## GMC

### GMC BUMPER MOUNTS

1500 & 2500/3500  
2011-2013 2007-2010  
46505  
(1) 20" SR-Series Pro  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** 2500/3500  
**YEAR** 2011-2014  
**PART NO.** 46506  
**FITS** (1) 20" E or SR-Series Pro or  
(2) 20" SR-Series Pro  
**NOTE** Lights Sold Separately

### GMC FOG LIGHT BRACKETS

1500  
2014-2015  
46511  
(2) D-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** 1500 & 2500/3500  
**YEAR** 2008-2013 2008-2010  
**PART NO.** 46507  
**FITS** (2) D-Series Pro  
**NOTE** Lights Sold Separately

1500 & 2500/3500  
2007-2013 2007-2010  
40338  
(2) D-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** 2500/3500  
**YEAR** 2015-2017  
**PART NO.** 46543  
**FITS** (2) D-Series Pro  
**NOTE** Lights Sold Separately

2500/3500  
2011-2014  
46508  
(2) D-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



## HONDA®

### HONDA HEADLIGHT MOUNT

CRF®  
2004-2016  
46516  
(1) SR-Q Series Pro  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



## HYUNDAI®

### BUMPER MOUNT

Tucson®  
2016-2017  
46557  
(2) 6" E or SR-Series Pro  
Light Sold Separately


**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



# VEHICLE SPECIFIC

**JEEP®**

## JEEP GRILLE KITS

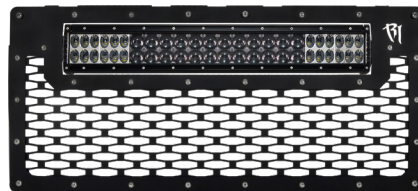

**MODEL** Wrangler® JK  
**YEAR** 2007-2017  
**PART NO.** 40591  
**FITS** (1) 20" E-Series Pro  
**NOTE** Light Sold Separately

## JEEP HOOD MOUNTS

Wrangler JK  
 2007-2015  
 40332  
 (1) 10" E or (1) 10" SR-Series Pro  
 Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** Wrangler JK  
**YEAR** 2007-2017  
**PART NO.** 40333  
**FITS** (1) 20" E or (1) 20" SR-Series Pro  
**NOTE** Light Sold Separately

## JEEP WINDSHIELD MOUNTS

Wrangler JK  
 2007-2017  
 40131  
 (1) 50" E or (1) 50" SR-Series Pro  
 Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** Wrangler TJ  
**YEAR** 1997-2006  
**PART NO.** 40137  
**FITS** (1) 50" E or (1) 50" SR-Series Pro  
**NOTE** Lights Sold Separately

## JEEP A-PILLAR MOUNTS

Wrangler JK  
 2007-2017  
 (single) 40331  
 (2) D-Series Pro  
 Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** Wrangler JK  
**YEAR** 2007-2017  
**PART NO.** 40139 (single swivel)  
**FITS** (2) D-Series Pro  
**NOTE** Lights Sold Separately

Wrangler JK  
 2007-2017  
 (pair) 40335  
 (4) D-Series Pro  
 Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** Wrangler  
**YEAR** 2007-2017  
**PART NO.** 46502  
**FITS** (2) Q-Series  
**NOTE** Lights Sold Separately

**MODEL** Wrangler JK  
**YEAR** 2007-2018  
**PART NO.** 41647  
**FITS** (2) Reflect  
**NOTE** Lights Sold Separately



## JEEP TAIL LIGHT MOUNTS

Wrangler JK  
 2007-2017  
 (Driver Side) 40311  
 (1) SR-M Pro or (1) SR-Q Series Pro  
 Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** Wrangler JK  
**YEAR** 2007-2017  
**PART NO.** 40322 (Passenger Side)  
**FITS** (1) SR-M Pro or (1) SR-Q Series Pro  
**NOTE** Lights Sold Separately

## JEEP FOG LIGHT MOUNT

**MODEL** Wrangler JK  
**YEAR** 2007-2017  
**PART NO.** 40138  
**FITS** (2) D-Series Pro  
**NOTE** Lights Sold Separately



## JEEP DOOR MOUNT

**MODEL** Wrangler JK  
**YEAR** 2007-2018  
**PART NO.** 41646  
**FITS** (2) Reflect  
**NOTE** Lights Sold Separately



# VEHICLE SPECIFIC

## KAWASAKI®

### KAWASAKI GRILLE MOUNT

Teryx®  
2010-2015  
46515  
(1) 10" SR-Series Pro  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



## KTM®

### KTM HEADLIGHT MOUNTS

KTM  
2013.5-2016  
(Top or Bottom) 46514  
TOP (2)SR-M Pro BOTTOM (1)SR-Q Pro  
or (2)SR-Q Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**


KTM  
2007-2013  
46513  
TOP(1) SR-Q Pro BOTTOM (1) SR-M Pro  
Lights Sold Separately

## NISSAN®

### NISSAN GRILLE KITS

Titan® (Without Camera)  
2016-2017  
40549  
20" E-Series Pro or Radiance Plus  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Frontier  
2009-2016  
40598  
(1) 10" E-Series Pro  
Light Sold Separately

Titan®(With Camera)  
2016-2017  
40548  
20" E-Series Pro or Radiance Plus  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Titan® & Armada®  
2004-2015 2004-2007  
40583  
(1) 20" E-Series Pro  
Light Sold Separately

### NISSAN FOG MOUNT

Titan  
2016-2017  
46580  
(2) D-Series Pro  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**




**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Titan  
2016-2017  
46585  
(2) SAE D-Series Pro  
INCLUDES LIGHTS

Titan  
2004-2015  
46561  
(2) D-Series Pro  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



Frontier  
2009-2016  
46578  
(2) D-Series Pro  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Frontier  
2009-2016  
46584  
(2) D-Series Pro  
INCLUDES LIGHTS

### NISSAN BUMPER MOUNT

Titan  
2016-2017  
46581  
(1) 20" E Pro or SR Pro or Radiance Plus  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**





# VEHICLE SPECIFIC

## POLARIS®

RZR® XP1000  
2014-2016  
40574  
(1) 10" SR-Series Pro  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



### POLARIS GRILLE KITS

**MODEL** RZR XP1000  
**YEAR** 2012-2013  
**PART NO.** 40557  
**FITS** (1) 10" SR-Series Pro  
**NOTE** Light Sold Separately

Ranger®  
2012-2013  
40340  
(1) 10" SR-Series Pro  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** Sportsman 850  
**YEAR** 2009-2014  
**PART NO.** 46553  
**FITS** (1) 6" SR-Series Pro  
**NOTE** Light Sold Separately

RZR Turbo  
2017 +  
41640  
(1) 10" SR-Series PRO  
INCLUDES LIGHT

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** RZR Turbo  
**YEAR** 2017 +  
**PART NO.** 41641  
**FITS** (1) 10" SR-Series PRO  
**NOTE** Light Sold Separately

### RZR 170 GRILLE & A-PILLARS



**MODEL** RZR 170  
**YEAR** 2009-2017  
**PART NO.** 46546  
**FITS** (2) SR-M Pro or (2) Rigid Ignite™  
**NOTE** Light Sold Separately

RZR XP1000  
2014-2016  
46526  
(2) PAR46 or (2) D-XL Pro or  
(2) D-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



### POLARIS A-PILLAR MOUNTS

**MODEL** RZR XP1000  
**YEAR** 2014-2016  
**PART NO.** 46528 (Double)  
**FITS** (4) D-Series Pro  
**NOTE** Lights Sold Separately

### POLARIS B-PILLAR MOUNTS



**MODEL** RZR XP1000 (2 Seater Only)  
**YEAR** 2014-2016  
**PART NO.** 46533  
**FITS** (2) SR-M or (2) SR-Q  
or (2) D-Series Pro  
**NOTE** Lights Sold Separately

### POLARIS ROOF MOUNTS

RZR XP1000  
2014-2015  
46532  
(1) 30" E or (1) 30" SR-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL** RZR XP1000  
**YEAR** 2014-2015  
**PART NO.** 46531  
**FITS** (1) 30" RDS-Series Pro  
**NOTE** Light Sold Separately



**MODEL** RZR Turbo  
**YEAR** 2017 +  
**PART NO.** 41653  
**FITS** (1) 30" ADAPT  
**NOTE** Light Sold Separately

### POLARIS MIRROR MOUNTS



**MODEL** RZR TURBO  
**YEAR** 2017 +  
**PART NO.** 41648  
**FITS** (2) REFLECT  
**NOTE** Light Sold Separately

# VEHICLE SPECIFIC

## POLARIS

### POLARIS FENDER KIT

RZR XP900 / XP1000  
2014-2016  
46562  
(2) SR-M Pro  
INCLUDES LIGHT

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



### POLARIS DOME LIGHT KIT

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

RZR XP1000  
2014-2016  
46522  
(2) A-Series  
Kit Sold Separately



### POLARIS REVERSE LIGHT KIT

RZR XP1000  
2014-2016  
46534  
(2) SR-M or (2) SR-Q Series Pro  
Kit Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



### HOOD SCOOP LIGHT KIT

RZR Turbo  
2017 +  
41642  
(1) SR-Series PRO  
INCLUDES LIGHT

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

RZR Turbo  
2017 +  
41643  
(1) 10" SR-Series PRO  
Light Sold Separately

### POLARIS LIGHT MOUNT KITS

RZR XP1000  
2014-2016  
46539  
(4) A-Series  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

RZR XP1000  
2014-2016  
46554  
(4) D-Series Pro  
Lights Sold Separately

RZR XP1000  
2014-2016  
465603  
(4) D-Series Pro  
INCLUDES LIGHTS

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Sportsman 850  
2009-2014  
46552  
(2) D-Series Pro or (1) 6" E-Series Pro  
Kit Sold Separately

## SUBARU®

### WRX/STI BUMPER MOUNT KIT

WRX/STI  
2010-2014  
46524  
(2) 6" E-Series Pro  
(2) 6" SAE Compliant  
INCLUDES LIGHT

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**BUMPER**  
**MOUNT KIT**  
**INCLUDES**  
**LIGHTS**



# VEHICLE SPECIFIC

TOYOTA®

## TOYOTA GRILLE KITS

FJ Cruiser®  
2005-2014  
(2 Piece) 40551  
(2) D-Series Pro & (2) 6" SR-Series Pro  
Lights Sold Separately



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE** Tacoma®  
2012-2015  
40552  
(1) 20" SR-Series Pro  
Light Sold Separately

FJ Cruiser  
2005-2014  
(Upper Piece) 40560  
(2) D-Series Pro  
Lights Sold Separately



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE** Tacoma  
2005-2011  
40553  
(1) 10" SR-Series Pro  
Light Sold Separately

FJ Cruiser  
2005-2014  
(Lower Piece) 40561  
(2) 6" SR-Series Pro  
Lights Sold Separately


**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE** Tacoma  
2005-2011  
40575  
(1) 20" SR-Series Pro  
Light Sold Separately

4Runner®  
2014-2016  
40596  
(1) 20" E-Series Pro  
Light Sold Separately


**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE** Tundra®  
2014-2017  
40570  
(2) D-Series Pro &  
(1) 20" E-Series Pro  
Lights Sold Separately

4Runner  
2010-2013  
(2 Piece) 40556  
(1) 20" SR-Series Pro &  
(2) D-Series Pro  
Lights Sold Separately

**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE** Tundra  
2010-2013  
40554  
(1) 30" SR-Series Pro  
Light Sold Separately

4Runner  
2010-2013  
(Upper Piece) 40562  
(1) 20" SR-Series Pro  
Light Sold Separately


**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



**MODEL  
YEAR  
PART NO.  
FITS  
NOTE** Tundra  
2010-2013  
40555  
(2) 6" SR-Series Pro &  
(1) 10" SR-Series Pro  
Lights Sold Separately

4Runner  
2010-2013  
(Lower Piece) 40563  
(2) D-Series Pro  
Lights Sold Separately

**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



**LASER CUT 304  
STAINLESS STEEL  
CONSTRUCTION**

Hilux®  
2012-2015  
40594  
(1) 20" SR-Series Pro  
Light Sold Separately

**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



Tacoma®  
2016-2017  
40597  
(1) 20" E-Series Pro or  
Radiance Plus  
Light Sold Separately

**MODEL  
YEAR  
PART NO.  
FITS  
NOTE**



# VEHICLE SPECIFIC

## TOYOTA

### TOYOTA BUMPER MOUNTS

Hilux  
2012-2015  
46538  
(1) 20" E or (1) 20" SR-Series Pro  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Tundra  
2014-2017  
46512  
(1) 30" SR-Series Pro  
Light Sold Separately

Tacoma  
2016-2017  
46566  
(1) 30" SR-Series Pro  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Tacoma  
2016-2017  
46568  
(1) 30" SR-Series Pro  
INCLUDES LIGHT

Tacoma  
2005-2015  
40156  
(1) 30" SR-Series Pro  
Light Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



### TOYOTA FOG LIGHT MOUNTS

Tacoma  
2016-2017  
46566  
(2) D-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**




**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Tacoma  
2016-2017  
46567  
(2) D-Series Pro  
INCLUDES LIGHT

Tacoma  
2012-2015  
46509  
(2) SR-M Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

Tacoma & Tundra  
2005-2011 2007-2013  
46530  
(2) D-Series Pro  
Lights Sold Separately

Tundra  
2014-2017  
46520  
(2) D-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**

4Runner  
2014-2016  
46540  
(2) D-Series Pro  
Lights Sold Separately

Hilux  
2012-2015  
46525  
(2) D-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



### TOYOTA ROOF RACK MOUNTS

FJ Cruiser  
2005-2014  
40132  
(1) 20" E-Series Pro &  
(2) 10" E-Series Pro  
Lights Sold Separately

**MODEL**  
**YEAR**  
**PART NO.**  
**FITS**  
**NOTE**



# VEHICLE SPECIFIC

YAMAHA®

## YXZ SHOCK MOUNT



**MODEL** YXZ1000R  
**YEAR** 2016-2017  
**PART NO.** 46576  
**FITS** (1) 10" SR-Series Pro  
**NOTE** Light Sold Separately

## YXZ A-PILLAR MOUNTS



**MODEL** YXZ1000R  
**YEAR** 2016-2017  
**PART NO.** 46569  
**FITS** (2) D Pro/DXL Pro/SR-M Pro/  
SR-Q Pro/PAR46/Rigid Ignite  
**NOTE** Light Sold Separately

## YXZ B-PILLAR MOUNTS



**MODEL** YXZ1000R  
**YEAR** 2016-2017  
**PART NO.** 46570  
**FITS** (2) D Pro/DXL Pro/SR-M Pro/SR-Q Pro/  
PAR46/Rigid Ignite  
**NOTE** Light Sold Separately

## YXZ ROOF MOUNTS



**MODEL** YXZ1000R  
**YEAR** 2016-2017  
**PART NO.** 46575  
**FITS** (1) 38" E or SR-Series Pro  
**NOTE** Light Sold Separately

## YXZ ROCK LIGHT MOUNTS



**MODEL** YXZ1000R  
**YEAR** 2016-2017  
**PART NO.** 46571  
**FITS** (4) A-Series  
**NOTE** Light Sold Separately

## YXZ DOME LIGHT MOUNT



**MODEL** YXZ1000R  
**YEAR** 2016-2017  
**PART NO.** 46572  
**FITS** (1) A-Series  
**NOTE** Light Sold Separately

ALL GRILLES  
AND MOUNTS ARE  
MADE IN THE  
USA

# SPECIALTY MOUNTS

## FIRE TRUCK

### BROW MOUNTS

(Black) 40001  
Up to (2) SR-Series  
Lights Sold Separately

**PART NO.**  
**FITS**  
**NOTE**



**PART NO.** 40002 (White)  
**FITS** Up to (2) SR-Series  
**NOTE** Lights Sold Separately

RIGID's Brow Mounts provide a straightforward high-output lighting solution to any fire apparatus. Engineered to fit up to two SR Series Light Bars or one E-Series Light Bar, the Brow Mount tabs utilize a through-bolt system for a simple and versatile installation.

### POLE MOUNT

40095  
Fits All Light Series And Cradles  
Lights Sold Separately

**PART NO.**  
**FITS**  
**NOTE**



Pole Mounts provide a highly portable way to light up any scene. This pole mount is engineered to fit two Q-Series, Scene Lights or one 10" E-Series Light bar. The mount is easily adjustable, enabling compact, powerful lighting to be focused anywhere needed.





"THIS IS HOW I  
LOOK WITH TWO  
Q-SERIES."

- POLE MOUNT

# SPECIALTY MOUNTS

## RI ACCESSORIES BY RAM®

RAM stands for "Round A-Mount" and features a unique, patented ball and socket design that provides a full 180° rotation of your mounted light. The ball is made from an elastomeric rubber, gripping the socket while also providing shock and vibration dampening. These mounts are compatible with Rigid Industries SR-M, SR-Q and D-Series LED lights. With RAM Mounts, the only limitation for lighting options is your imagination.

|  |  |   |  |  |  |
|--|--|---|--|--|--|
| 40060<br>Bolt Down<br>6"<br>6.25 x 2<br>Lights Sold Separately               | <b>PART NO.</b><br><b>MOUNT</b><br><b>ARM</b><br><b>PLATE</b><br><b>NOTE</b> |    |    | <b>PART NO.</b><br><b>MOUNT</b><br><b>ARM</b><br><b>PLATE</b><br><b>NOTE</b> | 40061<br>Pole Mount (0.5" - 1.25")<br>3.7"<br>1 x 1<br>Light Sold Separately |
| 40069<br>Bolt Down<br>3.7"<br>1 x 1<br>Light Sold Separately                 | <b>PART NO.</b><br><b>MOUNT</b><br><b>ARM</b><br><b>PLATE</b><br><b>NOTE</b> |    |    | <b>PART NO.</b><br><b>MOUNT</b><br><b>ARM</b><br><b>PLATE</b><br><b>NOTE</b> | 40063<br>Suction Cup<br>3.7"<br>6.25 x 2<br>Lights Sold Separately           |
| 40071<br>Bolt Down<br>2.4"<br>1 x 1<br>Light Sold Separately                 | <b>PART NO.</b><br><b>MOUNT</b><br><b>ARM</b><br><b>PLATE</b><br><b>NOTE</b> |    |    | <b>PART NO.</b><br><b>MOUNT</b><br><b>ARM</b><br><b>PLATE</b><br><b>NOTE</b> | 40064<br>Suction Cup<br>3.7"<br>1 x 1<br>Light Sold Separately               |
| 40073<br>Bolt Down<br>6"<br>1 x 1<br>Light Sold Separately                   | <b>PART NO.</b><br><b>MOUNT</b><br><b>ARM</b><br><b>PLATE</b><br><b>NOTE</b> |   |   | <b>PART NO.</b><br><b>MOUNT</b><br><b>ARM</b><br><b>PLATE</b><br><b>NOTE</b> | 40065<br>Suction Cup<br>2.4"<br>6.25 x 2<br>Lights Sold Separately           |
| 40074<br>Bolt Down<br>2.4"<br>6.25 x 2<br>Lights Sold Separately             | <b>PART NO.</b><br><b>MOUNT</b><br><b>ARM</b><br><b>PLATE</b><br><b>NOTE</b> |  |  | <b>PART NO.</b><br><b>MOUNT</b><br><b>ARM</b><br><b>PLATE</b><br><b>NOTE</b> | 40066<br>Suction Cup<br>2.4"<br>1 x 1<br>Light Sold Separately               |
| 40075<br>Bolt Down<br>3.7"<br>6.25 x 2<br>Lights Sold Separately             | <b>PART NO.</b><br><b>MOUNT</b><br><b>ARM</b><br><b>PLATE</b><br><b>NOTE</b> |  |  | <b>PART NO.</b><br><b>MOUNT</b><br><b>ARM</b><br><b>PLATE</b><br><b>NOTE</b> | 40067<br>Suction Cup<br>6"<br>6.25 x 2<br>Lights Sold Separately             |
| 40062<br>(0.5" - 1.25") Pole Mount<br>2.4"<br>1 x 1<br>Light Sold Separately | <b>PART NO.</b><br><b>MOUNT</b><br><b>ARM</b><br><b>PLATE</b><br><b>NOTE</b> |  |  | <b>PART NO.</b><br><b>MOUNT</b><br><b>ARM</b><br><b>PLATE</b><br><b>NOTE</b> | 40068<br>Suction Cup<br>6"<br>1 x 1<br>Light Sold Separately                 |
| 40070<br>(3") Pole Mount<br>3.7"<br>1 x 1<br>Light Sold Separately           | <b>PART NO.</b><br><b>MOUNT</b><br><b>ARM</b><br><b>PLATE</b><br><b>NOTE</b> |  |  | <b>PART NO.</b><br><b>MOUNT</b><br><b>ARM</b><br><b>PLATE</b><br><b>NOTE</b> | 40094<br>Double Suction Cup<br>n/a<br>6.25 x 2<br>Lights Sold Separately     |
| 40072<br>(3") Pole Mount<br>2.4"<br>1 x 1<br>Light Sold Separately           | <b>PART NO.</b><br><b>MOUNT</b><br><b>ARM</b><br><b>PLATE</b><br><b>NOTE</b> |  |  |  |  |



# MOUNTING OPTIONS

## FLUSH MOUNT BUCKETS

Gasket provided for weather proofing. 15° vertical direction adjustments.

| PART NO. | FITS                      |
|----------|---------------------------|
| 48301B   | A-Series - Black          |
| 48301W   | A-Series - White          |
| 40010B   | 4" E-Series Pro - Black   |
| 40010W   | 4" E-Series Pro - White   |
| 40011B   | 5" E-Series Pro - Black   |
| 40011W   | 5" E-Series Pro - White   |
| 40012B   | 10" E-Series Pro - Black  |
| 40012W   | 10" E-Series Pro - White  |
| 40013B   | 6" SR-Series Pro - Black  |
| 40013W   | 6" SR-Series Pro - White  |
| 40014B   | 10" SR-Series Pro - Black |
| 40014W   | 10" SR-Series Pro - White |
| 40015B   | Q-Series - Black          |
| 40015W   | Q-Series - White          |

## ANGLED FLUSH MOUNT KIT

| PART NO. | FITS         | ANGLE DIRECTION |
|----------|--------------|-----------------|
| 49000    | D-Series Pro | Down            |
| 49010    | D-Series Pro | Side            |
| 49002    | SR-Q Pro     | Down            |
| 49013    | SR-Q Pro     | Side            |
| 49001    | SR-M Pro     | Down            |
| 49011    | SR-M Pro     | Side            |

## A-SERIES MOUNTING KITS

| PART NO. |              |
|----------|--------------|
| 40007    | Angled Mount |
| 40008    | Radius Mount |

## LIGHT BAR CLAMPS

Compatible with the E, SR & RDS-Series Pro  
Two Per Set  
Hardware Included

## SINGLE BAR CLAMP

Compatible with D, SR-Q & SR-M Series Pro

| SIZE   | A-PILLAR | HORIZ | VERT  |
|--------|----------|-------|-------|
| .875"  | 40830    | 40840 | 40850 |
| 1.0"   | 41130    | 41040 | 41050 |
| 1.125" | 41230    | 41240 | 41250 |
| 1.25"  | 42530    | 42540 | 42550 |
| 1.50"  | 45030    | 45040 | 45050 |
| 1.625" | 46230    | 46240 | 46250 |
| 1.70"  | 47030    | 47040 | 47050 |
| 1.75"  | 47530    | 47540 | 47550 |
| 1.875" | 48530    | 48540 | 48550 |
| 2"     | 42030    | 42040 | 42050 |
| 2.25"  | 42230    | 42240 | 42250 |
| 2.375" | 42330    | 42340 | 42350 |
| 2.5"   | 45230    | 45240 | 45250 |
| 2.625" | 42630    | 42640 | 42650 |
| 2.75"  | 42730    | 42740 | 42750 |
| 2.875" | 42830    | 42840 | 42850 |
| 3"     | 43030    | 43040 | 43050 |
| 3.25"  | 43230    | 43240 | 43250 |

| SIZE   | E/SR PRO | RDS PRO |
|--------|----------|---------|
| .875"  | 40820    | 40821   |
| 1.0"   | 41020    | 41021   |
| 1.125" | 41120    | 41121   |
| 1.25"  | 42520    | 42521   |
| 1.50"  | 45020    | 45021   |
| 1.625" | 46220    | 46221   |
| 1.70"  | 47020    | 47021   |
| 1.75"  | 47520    | 47521   |
| 1.875" | 48720    | 48721   |
| 2"     | 42020    | 42021   |
| 2.25"  | 42220    | 42221   |
| 2.375" | 42320    | 42321   |
| 2.5"   | 45220    | 45221   |
| 2.625" | 42620    | 42621   |
| 2.75"  | 42720    | 42721   |
| 2.875" | 42820    | 42821   |
| 3"     | 43020    | 43021   |
| 3.25"  | 43220    | 43221   |

## CRADLES

Compatible with E-Series Pro & SR-Series Pro  
Hardware included

| SIZE | E-SERIES PRO (BLACK) | E-SERIES PRO (WHITE) | SR-SERIES PRO (BLACK) |
|------|----------------------|----------------------|-----------------------|
| 4"   | 40410                | 40411                | -                     |
| 5"   | 40610                | 40611                | 40690                 |
| 10"  | 41010                | 41011                | 41090                 |
| 20"  | 42010                | -                    | 42090                 |
| 30"  | 43010                | -                    | 43090                 |
| 40"  | 44010                | -                    | 44090                 |



41010  
10" E-Series Pro

## LICENSE PLATE BRACKET


Mountable with compact LED lights



PART NO.  
40016

## EXTENDED D-SERIES BRACKET

PART NO.  
46537



## CHASE LICENSE PLATE MOUNT



PART NO.  
41650 | Includes CHASE Light

## CHASE SPARE TIRE MOUNT



PART NO.  
41651 | Spare Tire Mount  
Can be used with 41650



# MOUNTING OPTIONS

## WELD ON TABS

Compatible with E-Series, SR-Series Pro & REFLECT



|       |                          |  |
|-------|--------------------------|--|
| 40291 | E-Series & SR-Series PRO | Flat (Pair)                                |
| 40292 | E-Series & SR-Series PRO | Radius (Pair)                              |
| 41645 | REFLECT                  | Flat (Pair)<br>REFLECT Flat Mount Included |

## REFLECT FLAT MOUNT BASE KIT

Compatible with Reflect



|                 |             |
|-----------------|-------------|
| <b>PART NO.</b> |             |
| 40291           | Flat (Pair) |

# LIGHT COVERS

## SINGLE LIGHT COVERS

| COLOR | E PRO / RDS PRO / RADIANCE PLUS 10" | RDS PRO 11" | E PRO 4" | E PRO 6" | SR PRO 6" | SR PRO 10" |
|-------|-------------------------------------|-------------|----------|----------|-----------|------------|
| Black | 105743                              | 105523      | 104913   | 106913   | 105843    | 190913     |
| Clear | 105753                              | 105533      | 104923   | 106923   | 105883    | 190923     |
| Amber | 105763                              | 105543      | 104933   | 106933   | 105863    | 190933     |
| Blue  | 105773                              | 105553      | 104943   | 106943   | 105873    | 190943     |
| Red   | 105783                              | 105563      | 104953   | 106953   | 105903    | 190953     |
| White | 105793                              | 105573      | 104963   | 106963   | 105853    | 190963     |
| Green | 105803                              | 105583      | 104973   | 106973   | 105893    | 190973     |
| Smoke | 105813                              | 105593      | 104983   | 106983   | 105913    | 190983     |

| COLOR | DXL PRO | D PRO  | D-SS PRO | SR-Q PRO | SR-M PRO | Q     | R 46  |
|-------|---------|--------|----------|----------|----------|-------|-------|
| Black | 321913  | 201913 | 321813   | 311913   | 301913   | 10391 | 63391 |
| Clear | 321923  | 201923 | 321823   | 311923   | 301923   | 10392 | 63392 |
| Amber | 321933  | 201933 | 321833   | 311933   | 301933   | 10393 | 63393 |
| Blue  | 321943  | 201943 | 321843   | 311943   | 301943   | 10394 | 63394 |
| Red   | 321953  | 201953 | 321853   | 311953   | 301953   | 10395 | 63395 |
| White | 321963  | 201963 | 321863   | 311963   | 301963   | 10396 | 63396 |
| Green | 321973  | 201973 | 321873   | 311973   | 301973   | 10397 | 63397 |
| Smoke | 321983  | 201983 | 321883   | 311983   | 301983   | 10398 | 63398 |



## LIGHT COVER KITS

| LIGHT SIZE         | COLOR | PART NO. | INCLUDED       |
|--------------------|-------|----------|----------------|
| 20" SR-Series Pro  | Black | 192913   | (2) 10" Covers |
| 30" SR-Series Pro  | Black | 193913   | (3) 10" Covers |
| 40" SR-Series Pro  | Black | 194913   | (4) 10" Covers |
| 50" SR-Series Pro  | Black | 195913   | (5) 10" Covers |
| 20" E-Series Pro   | Black | 120913   | (2) 10" Covers |
| 30" E-Series Pro   | Black | 130913   | (3) 10" Covers |
| 40" E-Series Pro   | Black | 140913   | (4) 10" Covers |
| 50" E-Series Pro   | Black | 150913   | (5) 10" Covers |
| 20" RDS-Series Pro | Black | 105703   | (2) 10" Covers |
| 30" RDS-Series Pro | Black | 105713   | (3) 10" Covers |
| 40" RDS-Series Pro | Black | 105723   | (4) 10" Covers |
| 50" RDS-Series Pro | Black | 105733   | (5) 10" Covers |
| 54" RDS-Series Pro | Black | 105613   | (5) 11" Covers |
| 54" RDS-Series Pro | Clear | 105623   | (5) 11" Covers |
| 54" RDS-Series Pro | Amber | 105633   | (5) 11" Covers |
| 54" RDS-Series Pro | Blue  | 105643   | (5) 11" Covers |
| 54" RDS-Series Pro | Red   | 105653   | (5) 11" Covers |
| 54" RDS-Series Pro | White | 105663   | (5) 11" Covers |
| 54" RDS-Series Pro | Green | 105673   | (5) 11" Covers |
| 54" RDS-Series Pro | Smoke | 105683   | (5) 11" Covers |



# WIRING

## WIRING HARNESS

| PART NO. | FITS   |
|----------|--|
| 40199    | SR-M Pro or SR-Q Pro   |
| 40195    | D-Series Pro - Flood (Pair)  |
| 40196    | D-Series Pro - Driving (Pair)  |
| 40192    | Back Up Light Kit Harness<br>D-Series Pro, Dually XL Pro, SR-Q Pro or SR-M Pro |
| 40194    | D-Series Pro (Single), 4" E-Series Pro, or<br>6" SR-Series Pro                 |
| 40193    | 10"- 50" SR-Series Pro or 10"- 30" E-Series Pro                                |
| 40190    | Hi Power 40"- 50" E-Series Pro or<br>20"- 30" RDS-Series Pro                   |
| 40200    | Radiance Plus Light Bars 10"- 50"  |
| 40300    | Radiance Pods  |



40196

## IN-LINE SWITCH

| PART NO. | LENGTH |
|----------|--------|
| 40051    | 24"    |



## 12V CIGARETTE LIGHTER ADAPTER

Length: 15'

| PART NO. | FITS  |
|----------|---|
| 40009    | D-Series Pro (Pair),<br>SR-M Pro (Pair),<br>SR-Q Pro (Pair) |



## PENDANT SWITCH KIT

Length: 15'

| PART NO. | LENGTH |
|----------|--------|
| 40052    | 24"    |



## HARNESS EXTENSION

Length: 1 Meter

| PART NO. | FITS                  |
|----------|-----------------------|
| 40197    | 30" or smaller lights |
| 40198    | 40" or larger lights  |



40197

## ROCKER SWITCHES

Replacement for 12V and 24V DC systems

| PART NO. | FITS  |
|----------|---|
| 40191    | 2 Position<br>Replacement Switch  |
| 40181    | 3 Position<br>May be used with Dual Function<br>LED Lights & Back Up Light Kits |



40191

## LED FLASHER

Works with up to 10 inch light  
Available in 7 patterns

| PART NO. | FITS            |
|----------|-----------------|
| 40312    | 3 amp - 12 Volt |
| 40324    | 3 amp - 24 Volt |
| 40612    | 6 amp - 12 Volt |




40312

## ANTI FLICKER ADAPTOR

PWM Adaptor - H13 to H4

| PART NO. | FITS                   |
|----------|------------------------|
| 55006    | 2007-Up Jeep JK models |

H13 to H4



55006

| PART NO. | FITS                   |
|----------|------------------------|
| 55007    | 2007-Up Jeep JK models |

## RELAY

Replacement for 12V and 24V DC systems

| PART NO. | FITS      |
|----------|-----------|
| 49012    | 12V Relay |
| 49024    | 24V Relay |



49024

# HOLSTERS

## SMALL RI-SERIES FLASHLIGHT HOLSTER

Flashlight Sold Separately



RI-500  
Shown

| PART NO. | FITS   |
|----------|--------|
| 30181    | RI-500 |

## LARGE RI-SERIES FLASHLIGHT HOLSTER

Flashlights Sold Separately



RI-1100  
Shown

RI-800  
Shown

| PART NO. | FITS              |
|----------|-------------------|
| 30182    | RI-800<br>RI-1100 |

**SECURITY NUT KITS**

| PART NO. | FITS                               |
|----------|------------------------------------|
| 40282    | D-Series Pro                       |
| 40283    | D-Series Pro (Heavy Duty)          |
| 40284    | E-Series Pro<br>SR-Series Pro      |
| 40286    | SR-M Series Pro<br>SR-Q Series Pro |
| 40287    | Q-Series                           |
| 40288    | A-Series                           |
| 40289    | Flush Mounts                       |
| 40290    | RDS-Series Pro                     |



**RIGID: NOW MAKING A THIEVES JOB HARDER**

40287

**POP DISPLAYS**

**COUNTER TOP POP DISPLAYS**

**PART NO. | INCLUDES**  
779912 (2) D-Series Pro Lights  
(1) 6" E-Series Pro Light



**PART NO. | INCLUDES**  
77991 (2) D-Series Pro  
(1) E-Series Pro



**PART NO. | INCLUDES**  
77992 (2) D-Series Pro (White Housing)  
(1) E-Series Pro (White Housing)



**PART NO. | INCLUDES**  
77995 (4) SR-M Series Pro

**SAE & SCENE LIGHT COUNTER TOP POP DISPLAY**

**PART NO. | INCLUDES**  
779913 (1) 2x2 Heavy Duty DC Scene Light  
(1) SAE Fog Light D-Series Pro  
(1) 6" SAE Auxiliary E-Series Pro



**RIGID INDUSTRIES RADIANCE BACK-LIT DISPLAY**

**PART NO | INCLUDES**  
220063 (1) 20" Radiance Display Bar Light  
with Automatic Back-Lit Color Changing



# THANK YOU RIGID NATION





**Warranty Information:**

[www.rigidindustries.com/warranty](http://www.rigidindustries.com/warranty)

**Sales/Customer Service:**

**Hours of Operation: 8:00 am - 5:00 pm MST**

**Toll Free: 855-760-5337**

**Copyright April 2018**

**Rigid Industries LED Lighting**

**779 N. Colorado St, Gilbert, Arizona 85233**

[www.rigidindustries.com](http://www.rigidindustries.com)

**#82541-B**