


ULTRA WIDE BEAM CHIRP TRANSDUCERS

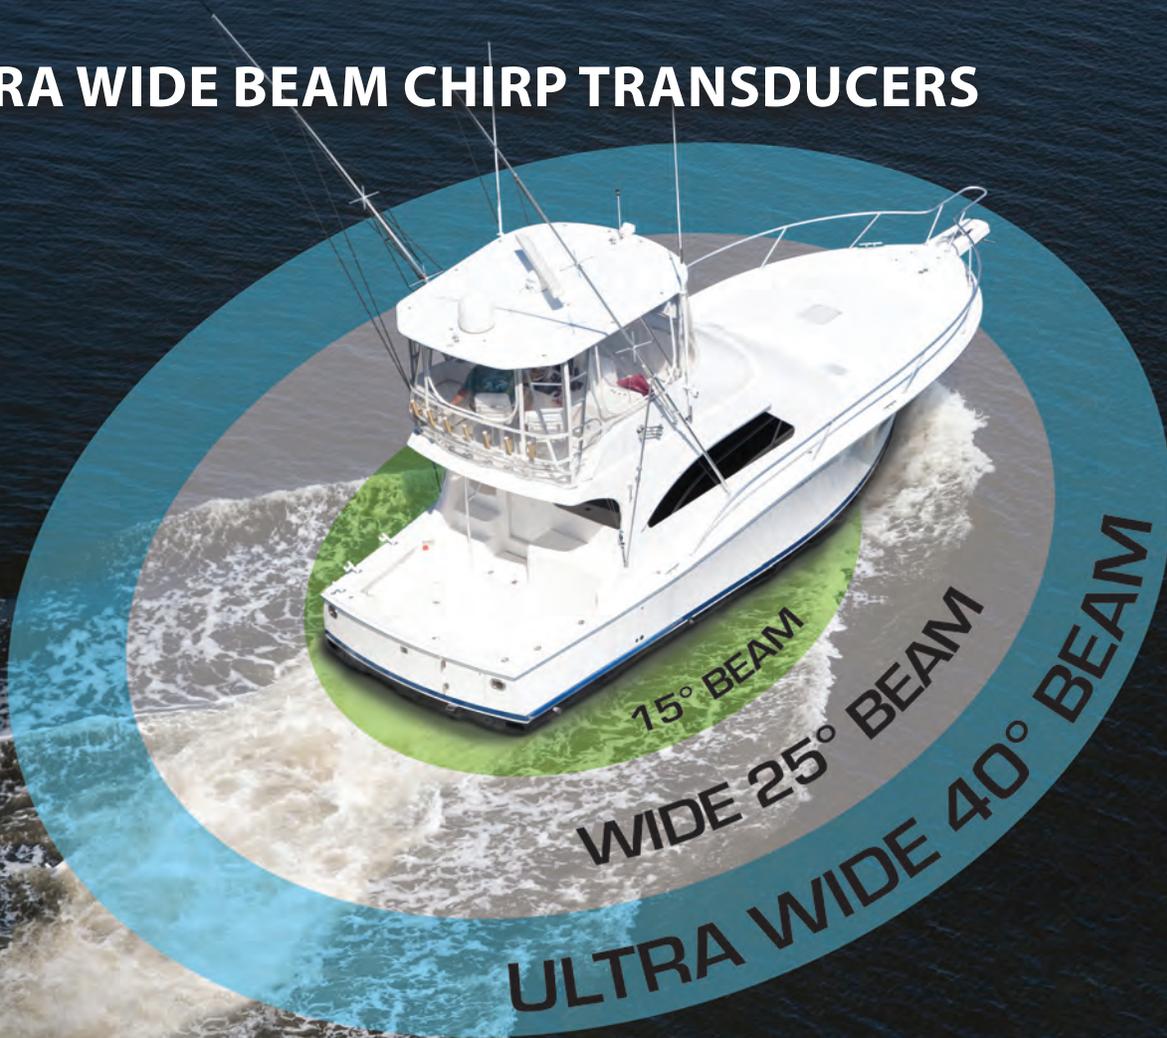

Sportfishing Tournament Series


Keeping you ahead of the competition and on top of the fish!

Outfish the competition with AIRMAR's new tournament series **Ultra Wide Beam** Chirp transducers. Now, get even MORE coverage under the boat. These Ultra Wide transducers offer a 40 degree beamwidth. Combining a low-frequency range of 40 to 60 kHz with a medium-frequency range of 80 to 130 kHz, this tournament series reveals more fish in the water column than ever before and is being reported by captains as the best transducer option. Don't miss the fish—install this transducer for your next tournament season. You'll be impressed with the results on your Chirp display!

We've got you covered.



Several Installation Methods for



Transom-Mount TM275LHW

1 kW

- Chirp-ready across the following bandwidths:
 - Low Frequency
42 to 65 kHz
25° to 16° Beamwidth
 - High Frequency
150 to 250 kHz
25° Constant Beamwidth
- Max Depth (low):
914 m (3000')
- Max Depth (high):
152 m (500')

TM185HW

1 kW

- Chirp-ready across the following bandwidth:
 - High Frequency
150 to 250 kHz
25° Constant Beamwidth
- Max Depth: 152 m (500')

- Depth & temp.
- Urethane housing and stainless steel mounting bracket
- Hull Type
 - Fiberglass, Wood, Metal
- Can retrofit to existing TM258 & TM260 bracket
- Includes Transducer ID®

Tilted Element B175HW

1 kW

- Chirp-ready across the following bandwidths:
 - High Frequency
150 to 250 kHz
25° Constant Beamwidth
- Max Depth:
152 m (500')
- Available in 0°, 12° & 20° tilted versions

- Depth & temp.
- Bronze housing
- Hull Type
 - Fiberglass, Wood
- Also available in Stainless Steel **SS175HW**
0°, 12° & 20° tilted versions
- Includes Transducer ID®

In-Hull M285HW

1 kW

- Chirp-ready across the following bandwidth:
 - High Frequency
150 to 250 kHz
25° Constant Beamwidth
- Max Depth:
152 m (500')

- Depth only
- Plastic housing
- Hull Type
 - Solid Fiberglass only
- Includes Transducer ID®

Thru-Hull B275LHW

1 kW

- Chirp-ready across the following bandwidths:
 - Low Frequency
42 to 65 kHz
25° to 16° Beamwidth
 - High Frequency
150 to 250 kHz
25° Constant Beamwidth
- Max Depth (low):
914 m (3000')
- Max Depth (high):
152 m (500')

B285HW

1 kW

- Chirp-ready across the following bandwidth:
 - High Frequency
150 to 250 kHz
25° Constant Beamwidth
- Max Depth: 152 m (500')






- Depth & temp.
- Bronze housing with high-performance fairing
- Hull Type
 - Fiberglass, Wood
- B275LHW can retrofit to existing B260 install
- Includes Transducer ID®

Thru-Hull R109LHW

2 kW

- Chirp-ready across the following bandwidths:
 - Low Frequency
38 to 75 kHz
19° to 10° Beamwidth (port-starboard)
10° to 5° Beamwidth (fore-aft)
 - High Frequency
150 to 250 kHz
25° Constant Beamwidth
- Max Depth (low):
1829 m (6000')
- Max Depth (high):
152 m (500')

- Depth & temp.
- Urethane housing with stuffing tube and high-performance fairing
- Hull Type
 - Fiberglass, Wood, Metal
- Can retrofit to existing R99 install
- Includes Transducer ID®

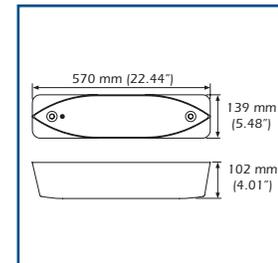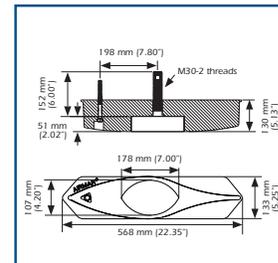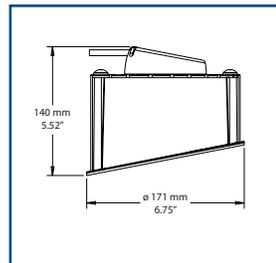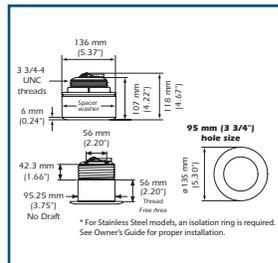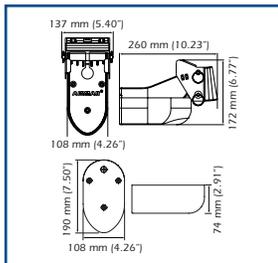

The maximum depth of all wide beam Chirp transducers is 152 m (500')

Wide Beam Chirp Transducers



Thru-Hull R509LHW 3 kW

- Chirp-ready across the following bandwidths:
 - Low Frequency
28 to 60 kHz
23° to 9° Beamwidth (port-starboard)
11° to 5° Beamwidth (fore-aft)
 - High Frequency
150 to 250 kHz
25° Constant Beamwidth
- Max Depth (low): 3048 m (10000')
- Max Depth (high): 152 m (500')

- Depth & temp.
- Epoxy housing with stuffing tube and high-performance fairing
- Hull Type
— Fiberglass, Wood, Metal
- Can retrofit to existing R209 install
- Includes Transducer ID®

Pocket/Keel Mount PM275LHW 1 kW

- Chirp-ready across the following bandwidths:
 - Low Frequency
42 to 65 kHz
25° to 16° Beamwidth
 - High Frequency
150 to 250 kHz
25° Constant Beamwidth
- Max Depth (low): 914 m (3000')
- Max Depth (high): 152 m (500')

- Depth & temp.
- Bronze housing
- Hull Type
— Fiberglass only
- Flat face design ideal for pocket/keel-mount installation
- Includes Transducer ID®

Pocket/Keel-Mount PM111LHW 2 kW

- Chirp-ready across the following bandwidths:
 - Low Frequency
38 to 75 kHz
19° to 10° Beamwidth (port-starboard)
10° to 5° Beamwidth (fore-aft)
 - High Frequency
150 to 250 kHz
25° Constant Beamwidth
- Max Depth (low): 1829 m (6000')
- Max Depth (high): 152 m (500')

- Depth & temp.
- Urethane housing
- Hull Type
— Fiberglass only
- Includes Transducer ID®

Tank-Mount CM275LHW 1 kW






- Chirp-ready across the following bandwidths:
 - Low Frequency
42 to 65 kHz
25° to 16° Beamwidth (port-starboard)
150 to 250 kHz
25° Constant Beamwidth
- Max Depth (low): 914 m (3000')
- Max Depth (high): 152 m (500')

- Depth & temp.
- Urethane housing
- Hull Type
— Fiberglass, Wood
- Cannot be pocket mounted
- Recessed design ideal for tank mount installation
- Includes Transducer ID®



Tank-Mount/Pocket/Keel Mount CM599LHW 3 kW

- Chirp-ready across the following bandwidths:
 - Low Frequency
28 to 60 kHz
23° to 9° Beamwidth (port-starboard)
11° to 5° Beamwidth (fore-aft)
 - High Frequency
150 to 250 kHz
25° Constant Beamwidth
- Max Depth (low): 3048 m (10000')
- Max Depth (high): 152 m (500')

- Depth & temp.
- Epoxy housing
- Hull Type
— Fiberglass, wood or metal
- Tank Installation
- Same shape and size as R599
- Recessed design ideal for tank mount installation
- Includes Transducer ID®

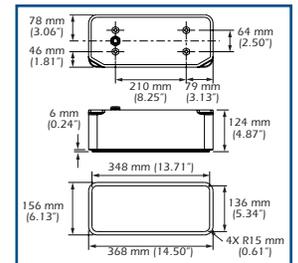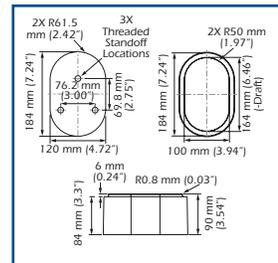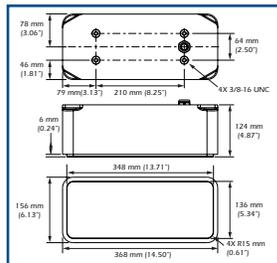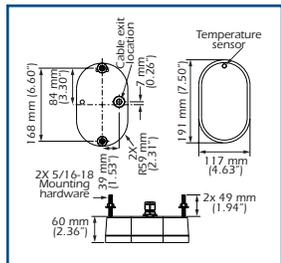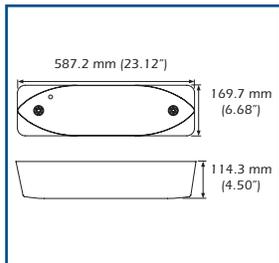


Ultra Wide Beam Chirp Transducers

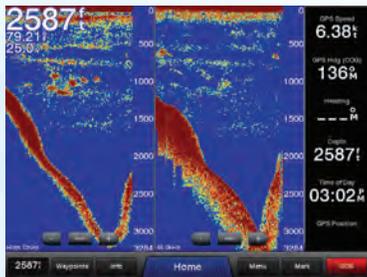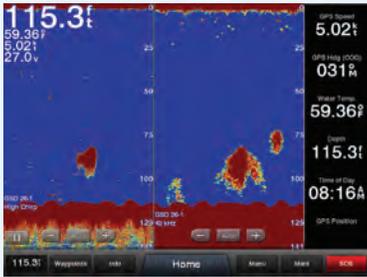


Thru-Hull R409LWM 2kW

- Chirp-ready across the following bandwidths:
 - Low Frequency 40 to 60 kHz, 40° Constant Beamwidth
 - Medium Frequency 80 to 130 kHz, 13° to 8° Beamwidth
- Max depth (low): 1219 m (4000')
- Depth & temp.
- Urethane housing w/ stuffing tube and high-performance fairing
- Hull Type: Fiberglass, Wood, Metal

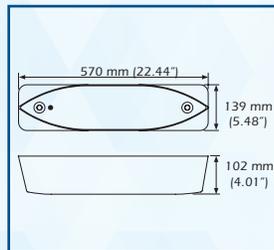


Pocket/Keel-Mount PM411LWM 2kW

- Chirp-ready across the following bandwidths:
 - Low Frequency 40 to 60 kHz, 40° Constant Beamwidth
 - Medium Frequency 80 to 130 kHz, 13° to 8° Beamwidth
- Max depth (low): 1219 m (4000')
- Depth & temp.
- Urethane housing
- Hull Type: Fiberglass only

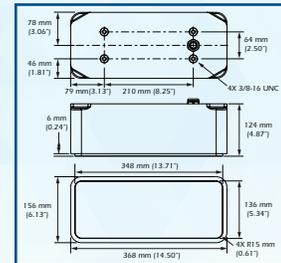

Bottom Coverage Relative to Depth

Depth	Beam Coverage		
	PM111LM/LH 15° Beamwidth	PM111LHW 25° Beamwidth	PM411LWM 40° Beamwidth
50 ft	13 ft	22 ft	36 ft
100 ft	26 ft	44 ft	73 ft
300 ft	79 ft	130 ft	220 ft
600 ft	160 ft	270 ft	440 ft
1000 ft	260 ft	440 ft	730 ft

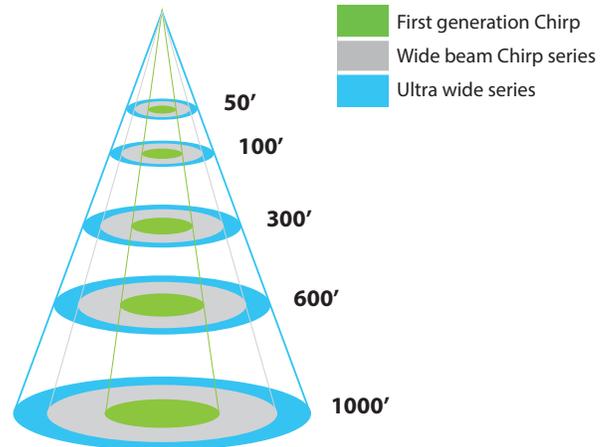

@2021 Airmar Technology Corporation

SPORTFISHING_CHIRP_TOURNAMENT_rF 05/31/21

As Airmar constantly improves its products, all specifications are subject to change without notice. All Airmar products are designed to provide high levels of accuracy and reliability, however they should only be used as aids to navigation and not as a replacement for traditional navigation aids and techniques. Xducer® ID is a registered trademark of Airmar Technology Corporation. Other company or product names mentioned in this document may be trademarks or registered trademarks of their respective companies, which are not affiliated with Airmar.

