
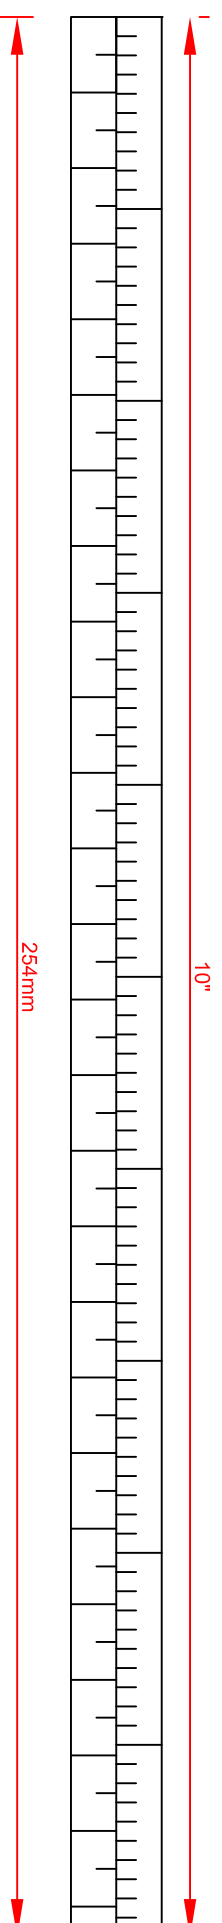


267 [10 1/2"]
257 [10 1/8"]

Touch 10 Cutout Template

1. Place Touch 10 cutout template on chosen mounting wall using adhesive tape
2. Use a 10mm drill to cut four corner radius
3. Cut along dotted line and remove inner section
4. Select appropriate mounting screws for wall thickness from supplied screws (20mm or 30mm)
4. Hold metal backing frame behind mounting wall cutout
5. Screw plastic mounting bracket (ensure TOP or BOTTOM engraved on bracket is correct) to metal backing frame using chosen screws and supplied screwdriver
6. Insert Touch 10 into mounting bracket by hooking top of panel into bracket and clipping at bottom
7. To remove Touch 10 from bracket insert flathead screwdriver into bottom edge slot and twist

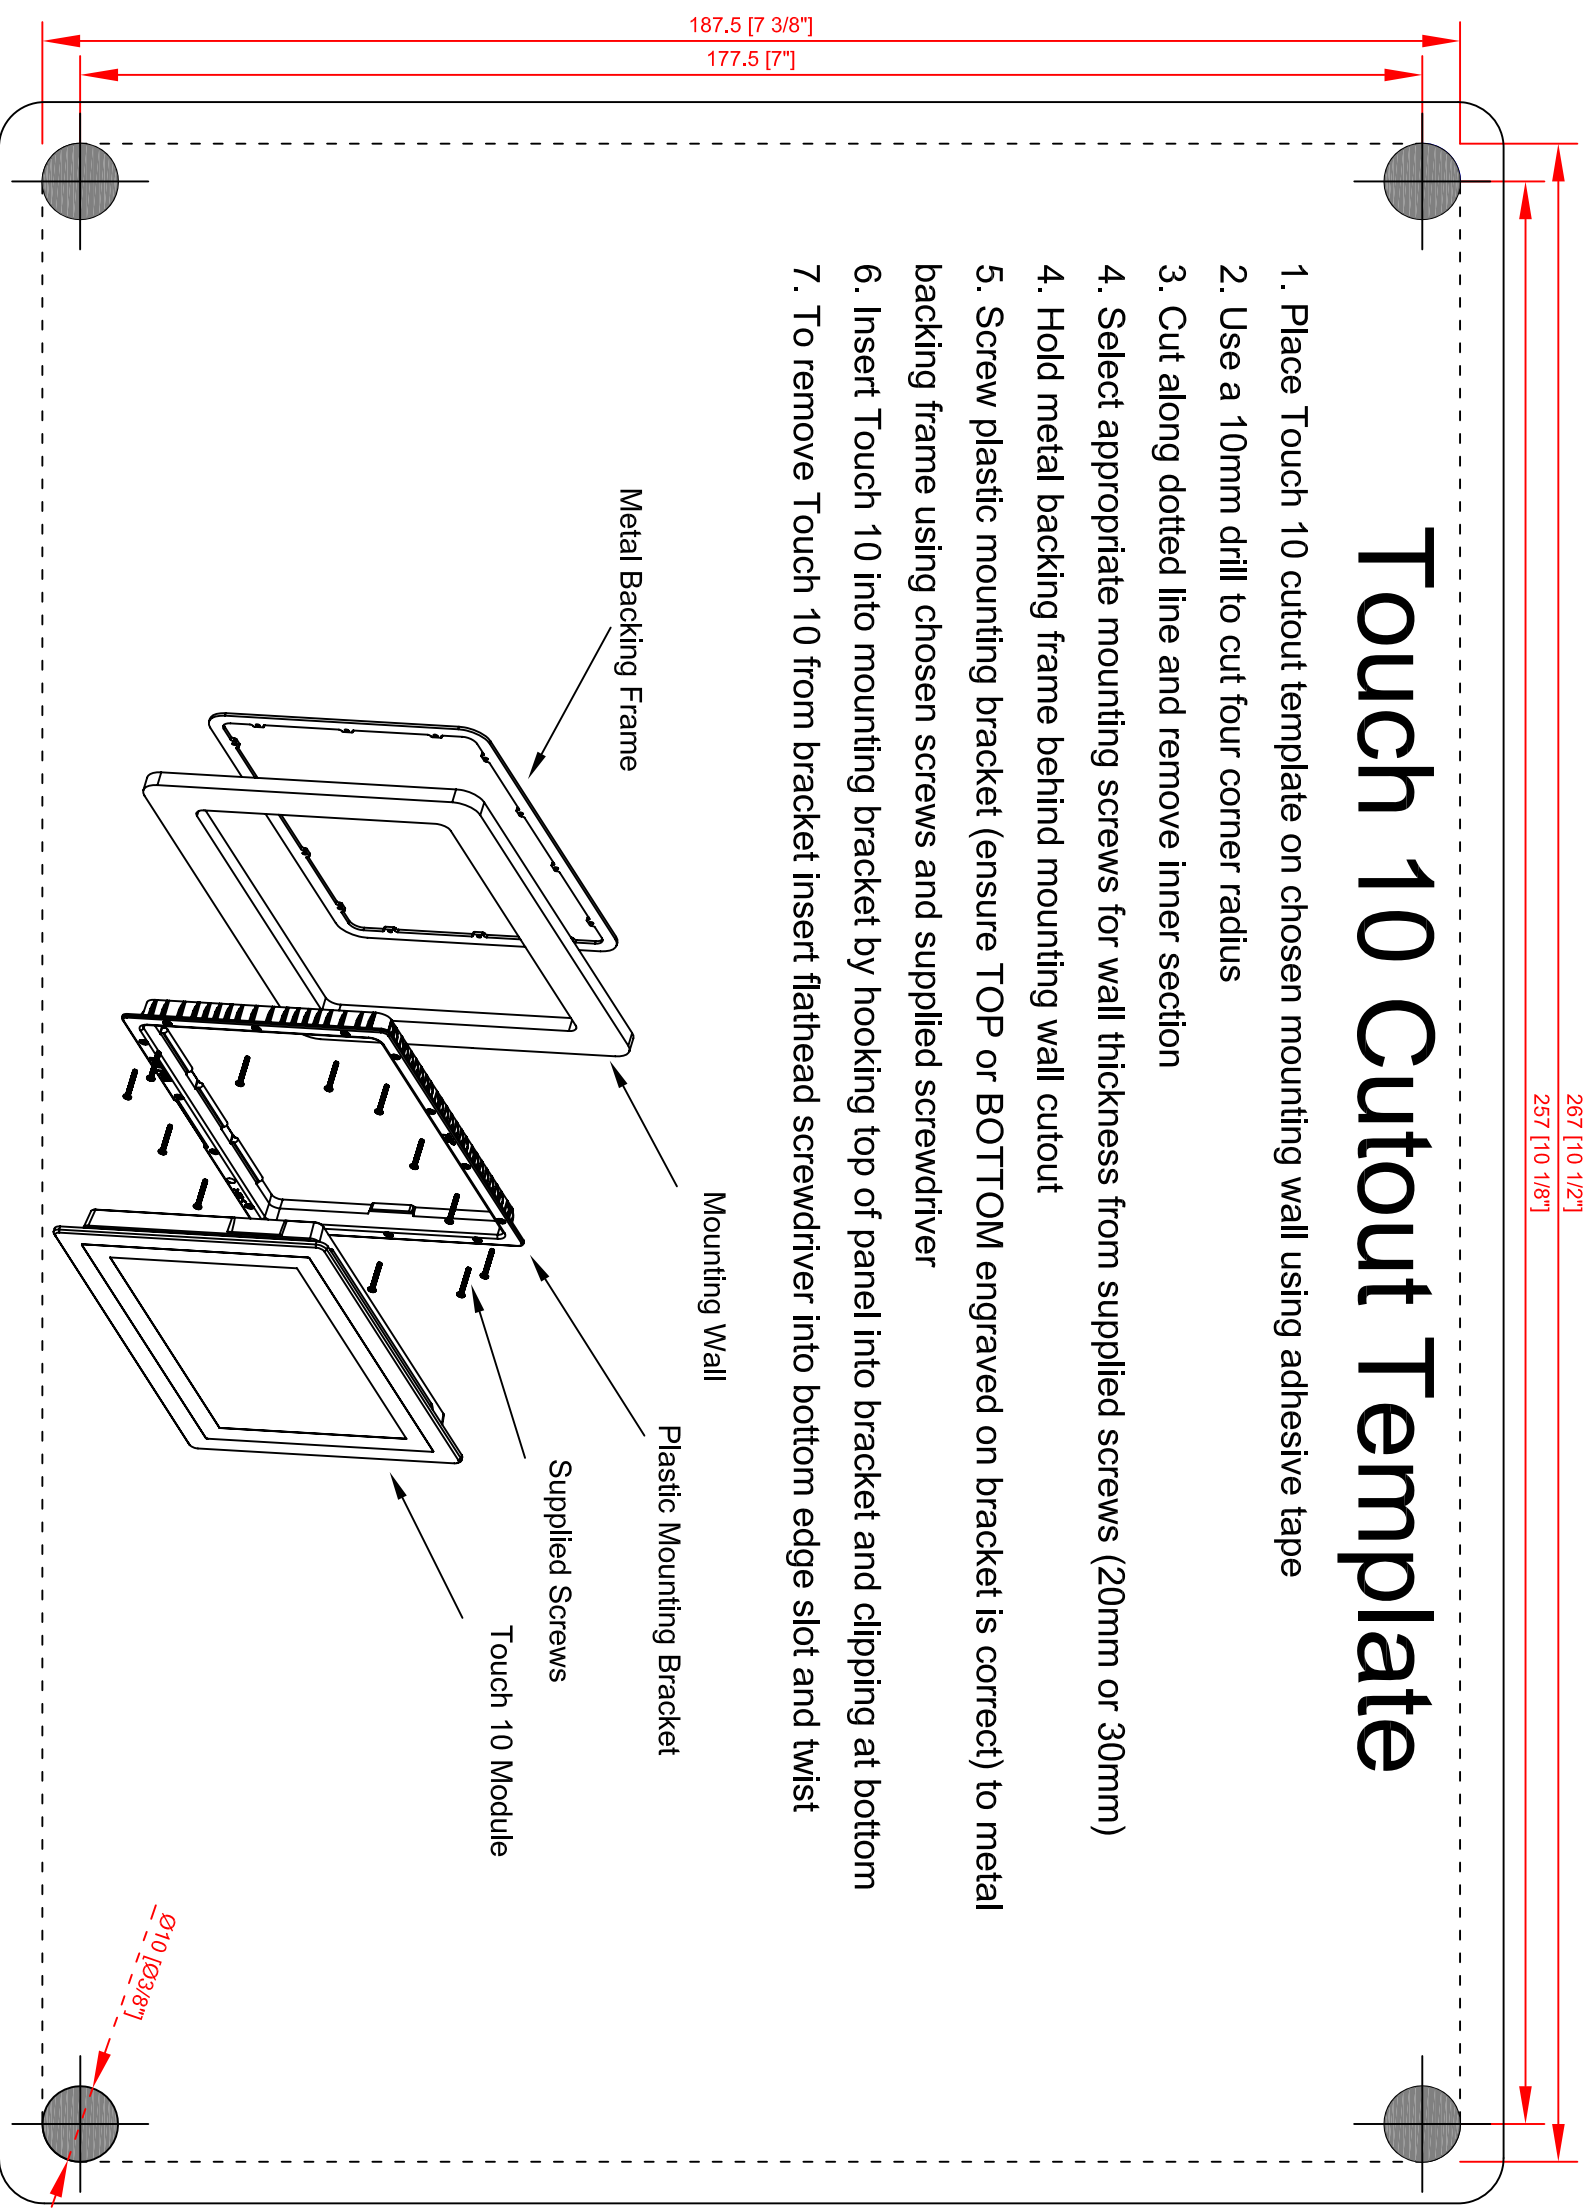

Do Not Scale! Print 1:1 - Check dimensions are correct before cutting!